chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	TAB SIZE	WIRE RANGE		COLOR	MAX. WIRE INSUL. DIA.	DIMENSIONS in. [mm]			
		ENGLISH	METRIC			L ± .03 [0,8]	H ± .01 [0,3]	W ± .01 [0,3]	D ± .03 [0,8]
DNFR18-250B	.250 X .032 [6,3 X 0,8]	22-18	0,5-1,0	RED	.13 [3,3]	.78 [19,8]	.20 [5,1]	.36 [9,1]	.62 [15,7]
DNFR14-250B	.250 X .032 [6,3 X 0,8]	16-14	1,5-2,5	BLUE	.16 [4,1]				.63 [16,0]
DNFR18-205B	.205 X .032 [5,2 X 0,8] OR .187 X .020 [4,8 X 0,5]	22-18	0,5-1,0	RED	.13 [3,3]				.62 [15,7]
DNFR14-205B		16-14	1,5-2,5	BLUE	.16 [4,1]				.63 [16,0]
DNFR18-206B		22-18	0,5-1,0	RED	.13 [3,3]				.62 [15,7]
DNFR14-206B		16-14	1,5-2,5	BLUE	.16 [4,1]				.63 [16,0]

LISTED 20H3 E78522

CERTIFIED LR31212

NOTES:

1. USED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 221°F [105°C] MAX. OPERATING TEMPERATURE
   C. 600 V. MAX. VOLTAGE RATING
2. MATERIAL:
   A. STAMPING: .018 [0,46] TIN PLATED BRASS
   B. HOUSING: NYLON
3. INSTALLATION TOOLS: CT-1525, CT-2500 (CT-2525CH)
4. WIRE STRIP LENGTH: 9/32 $^{+1/32}_{-0}$ [7,1 $^{+0,8}_{-0}$]
5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
7. FIRST INSERTION FORCE: 12 Lb [53 N] MAXIMUM
   FIRST WITHDRAWAL FORCE: 12 Lb [53 N] MAXIMUM
   6 Lb [27 N] MINIMUM

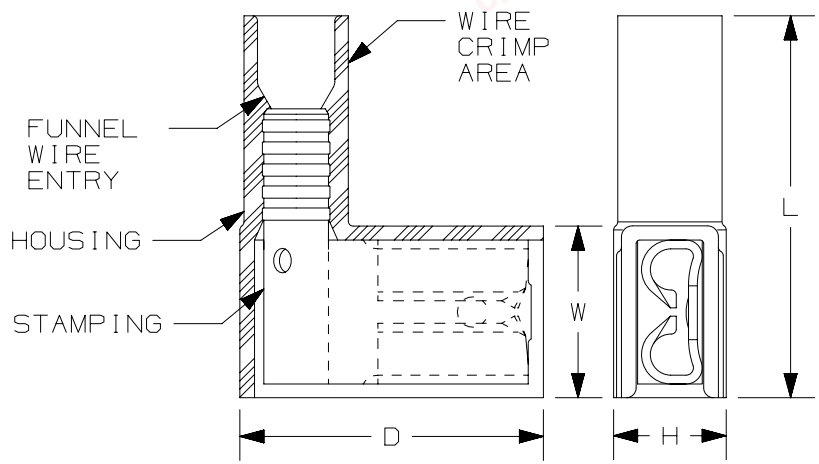

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09	10.18.12	JBN	LSM	VMB	UPDATED DRAWING TO CURRENT STANDARDS	A41329

D10100DA/12

TITLE: RIGHT ANGLE FEMALE DISCONNECT, NYLON INSULATED, FUNNEL ENTRY

CUSTOMER DRAWING

ITEM REVISION NAME: N41329BA/09

DATASET FILE NAME: N41329BA_DC/09A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .1 [2.54] .xxx ± .005 [.127]
.xx ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41329

DRAWN BY	DATE	CHK	SCALE	SIZE
DAW	-	RLS	N.T.S.	A

SHEET 1 OF 1