chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	TAB SIZE	WIRE RANGE		COLOR	MAX. WIRE INSUL. DIA.	DIMENSIONS in. [mm]			
		ENGLISH	METRIC			L ± .03 [0,8]	H ± .01 [0,3]	W ± .01 [0,3]	D ± .03 [0,8]
DNFR18-250B	.250 X .032 [6,3 X 0,8]	22-18	0,5-1,0	RED	.13 [3,3]	.78 [19,8]	.20 [5,1]	.36 [9,1]	.62 [15,7]
DNFR14-250B	.250 X .032 [6,3 X 0,8]	16-14	1,5-2,5	BLUE	.16 [4,1]				.63 [16,0]
DNFR18-205B	.205 X .032 [5,2 X 0,8] OR .187 X .020 [4,8 X 0,5]	22-18	0,5-1,0	RED	.13 [3,3]				.62 [15,7]
DNFR14-205B		16-14	1,5-2,5	BLUE	.16 [4,1]				.63 [16,0]
DNFR18-206B		22-18	0,5-1,0	RED	.13 [3,3]				.62 [15,7]
DNFR14-206B		16-14	1,5-2,5	BLUE	.16 [4,1]				.63 [16,0]

LISTED 20H3 E78522

CERTIFIED LR31212

NOTES:

1. USED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 221°F [105°C] MAX. OPERATING TEMPERATURE
   C. 600 V. MAX. VOLTAGE RATING
2. MATERIAL:
   A. STAMPING: .018 [0,46] TIN PLATED BRASS
   B. HOUSING: NYLON
3. INSTALLATION TOOLS: CT-1525, CT-2500 (CT-2525CH)
4. WIRE STRIP LENGTH: 9/32 $^{+1/32}_{-0}$ [7,1 $^{+0,8}_{-0}$]
5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
7. FIRST INSERTION FORCE: 12 Lb [53 N] MAXIMUM
   FIRST WITHDRAWAL FORCE: 12 Lb [53 N] MAXIMUM
   6 Lb [27 N] MINIMUM

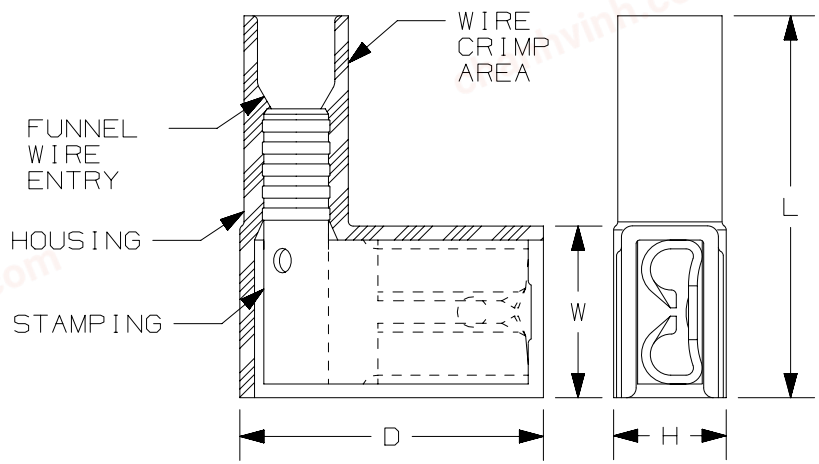

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09	10.18.12	JBN	LSM	VMB	UPDATED DRAWING TO CURRENT STANDARDS	A41329

TITLE

RIGHT ANGLE FEMALE DISCONNECT, NYLON INSULATED, FUNNEL ENTRY

CUSTOMER DRAWING

ITEM REVISION NAME: N41329BA/09

DATASET FILE NAME: N41329BA_DC/09A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .1 [2.54] .XXX ± .005 [.127]

.XX ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41329

DRAWN BY	DATE	CHK	SCALE	SHEET	SIZE
DAW	-	RLS	N.T.S.	SHEET 1 OF 1	A

D10100DA/12