chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER**	PANEL THICKNESS	A ±0.013 (0.33)	B ±0.015 (0.38)	C +0.020 (0.51) -0.015 (0.38)	D +0.020 (0.51) -0.015 (0.38)	E REF.	F ±TOL.	G REF.	R REF.	JIS PANEL DESIGNATION
GE_62F-A-C	0.036 - 0.062 (0.91 - 1.57)	0.031 (0.79)	0.070 (1.78)	0.130 (3.30)	0.030 (0.76)	0.131 (3.33)	0.105 +0.005 (0.13) (2.67) -0.025 (0.64)	0.150 (3.81)	0.015 - 0.055 (0.38 - 1.40)	012
K GE_99F-A-C	0.062 - 0.099 (1.57 - 2.51)	0.049 (1.24)	0.108 (2.74)	0.155 (3.94)	0.030 (0.76)	0.169 (4.29)	0.125 +0.005 (0.13) (3.18) -0.035 (0.89)	0.150 (3.81)	0.015 - 0.055 (0.38 - 1.40)	016
GE_144F-A-C	0.099 - 0.144 (2.51 - 3.66)	0.080 (2.03)	0.152 (3.86)	0.192 (4.88)	0.030 (0.76)	0.213 (5.41)	0.160 +0.005 (0.13) (4.06) -0.035 (0.89)	0.150 (3.81)	0.015 - 0.055 (0.38 - 1.40)	024, 032
J GE_189F-A-C	0.144 - 0.189 (3.66 - 4.80)	0.125 (3.18)	0.206 (5.23)	0.255 (6.48)	0.046 (1.17)	0.297 (7.55)	0.240 +0.005 (0.13) (6.09) -0.035 (0.89)	0.150 (3.81)	0.015 - 0.055 (0.38 - 1.40)	N/A

NOTES:

* 1. DIM'S F & G APPLY ONLY TO SLOTTED GROMMET EDGING.


** 2. PART NO. EXAMPLE:


GE S 62 F - A - C 0

- GE — GROMMET EDGING
- S=SOLID, E=SLOTTED — S
- 62 — MAX. PANEL THICKNESS
- F=POLYETHYLENE — F
- A=ADHESIVE — A
- C — 100 FOOT ROLL
- 0 — WEATHER RESISTANT BLACK

3. SEE CURRENT PRICE SHEET FOR PART NO. SUFFIX DESIGNATION FOR PACKAGE SIZE.
4. COLOR: a) NATURAL
   b) -0 AFTER PART NO. DENOTES WEATHER RESISTANT BLACK
5. THE ADHESIVE WIDTH IS TO STRETCH COMPLETELY ACROSS THE PRODUCT PROFILE.
6. SLOTTED WALL STYLE IS RECOMMENDED FOR INSIDE PANEL CUT OUTS.
   SOLID WALL STYLE IS RECOMMENDED FOR STRAIGHT, OUTSIDE EDGES.
7. REELS MAY CONTAIN A MAXIMUM OF THREE SPLICES
8. DIMENSIONS IN PARENTHESES ARE IN METRIC.

L

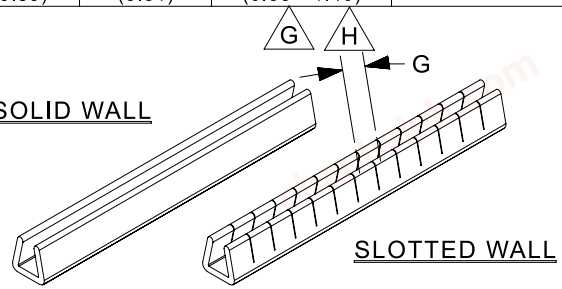

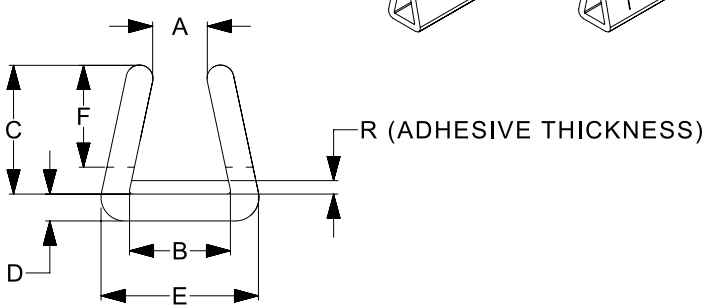

F

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
13	9/9/2024	RVU	JEFP	MSAD	L. (0.89) WAS (0.64). K. CHANGED FROM -0.025" TO -0.035".	GAECN07236
12	06-16-21	JBN	MDS	JADE	J. ADDED P/N GE_189F-A-C TO TABLE	102254
11	06-20-16	BDK	MRJS	RGRO	H. DIM. R FOR GE_62F-A-C, GE_99F-A-C AND GE_144F-A-C RESPECTIVELY WERE 0.030 (0.76), 0.027 (0.69) AND 0.036 (0.91)	GB0308BA
10	01-21-15	JBN	MRJS	RGRO	G. REVISED DIM. "R" F. REMOVED PRIOR REVISIONS MARKS- SEE PREVIOUS DRWG	GB0308BA

TITLE

ADHESIVE LINED GROMMET EDGING

CUSTOMER DRAWING

ITEM REVISION NAME: G03597DN/07

DATASET FILE NAME: G03597DN_DC_GB0308BA_13/07A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .XXX ±

.XX ± ANGLES ±

THIRD ANGLE PROJECTION

PANDUIT

MATERIAL: SEE NOTE #2

DRAWING NUMBER: GB0308BA

DRAWN BY	DATE	CHK	SCALE	SHT	SIZE
CPE	02-17-93		N.T.S.	1 OF 1	A