
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT TOOL NO.	INSTALLS * THE FOLLOWING STAINLESS STEEL CABLE TIE CROSS-SECTION **	WEIGHT/PC	
		OZ	GRAMS
GS4MT-E	STD LH & H	15.52	440

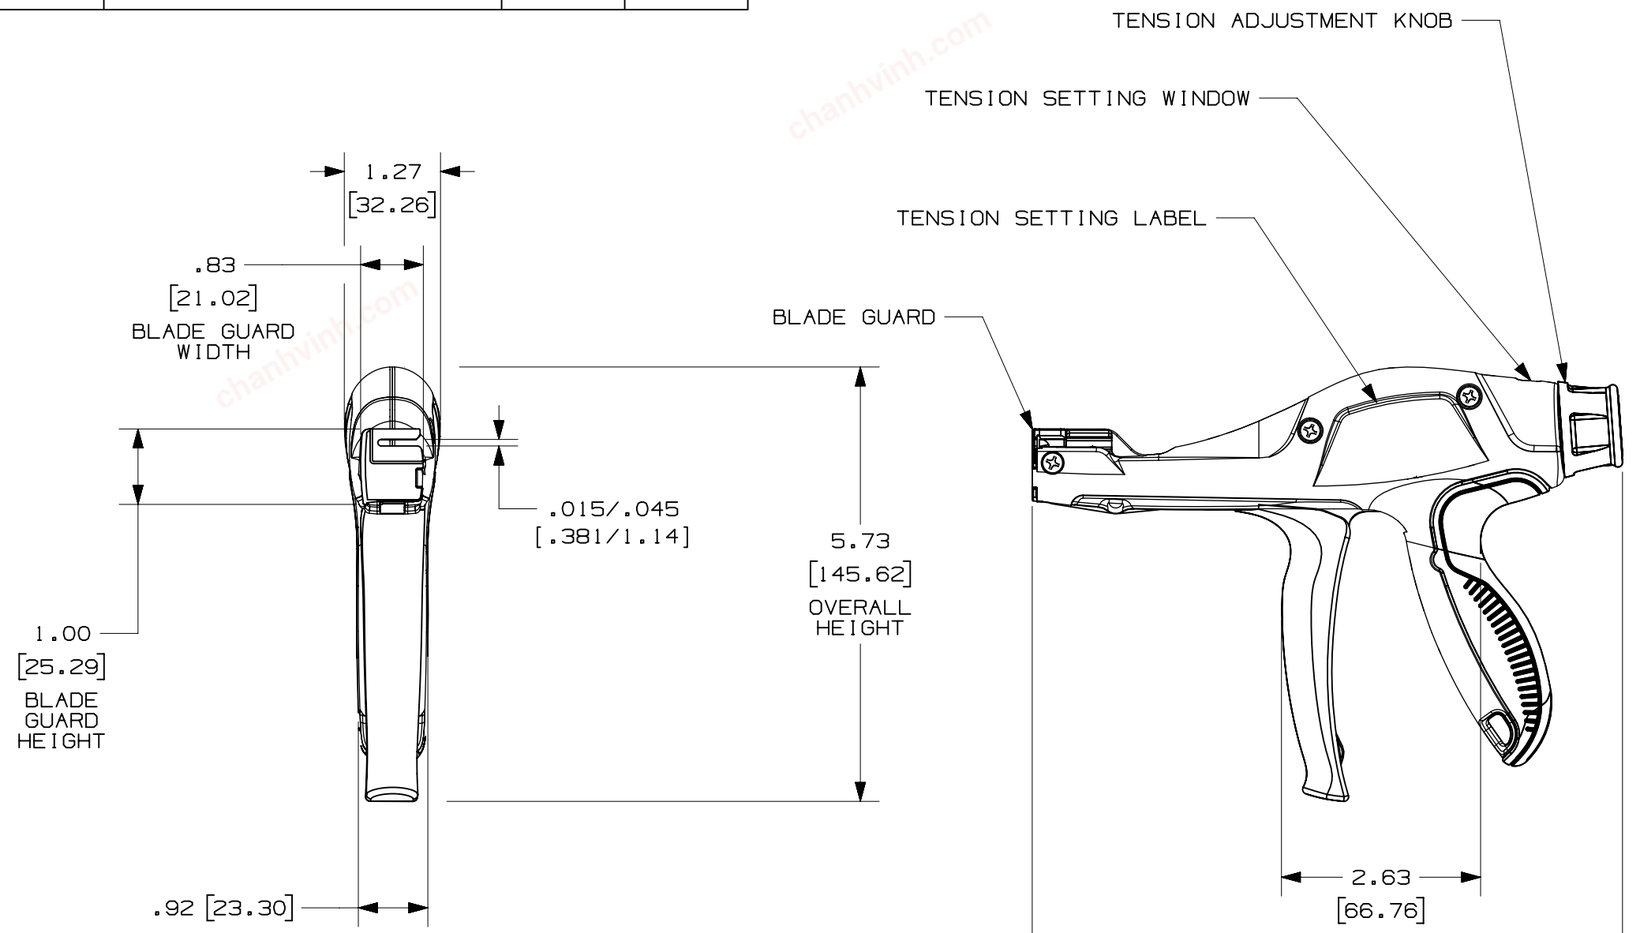

NOTES, UNLESS OTHERWISE SPECIFIED:

RoHS COMPLIANT.

* THIS TOOL TIGHTENS PANDUIT STAINLESS STEEL CABLE TIES AND CUTS OFF EXCESS PORTION WHEN PRESET TENSION IS ATTAINED.

(A) EACH TOOL IS CALIBRATED TO CONFORM TO INTERNAL PANDUIT REQUIREMENTS.

** CABLE TIE CROSS-SECTION CODE:
STD = STANDARD
LH = LIGHT HEAVY
H = HEAVY

DIMENSIONS IN BRACKETS ARE METRIC.

TENSION SETTINGS

TIE WIDTH	—	—
SETTING	STD 1-4	HVY 5-8

MS90387-3

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03	4-27-22	JBN	MRJS	ALP	A. ADDED NOTE	120169
02	8-28-18	JEH	ABJ	JADE	UPDATED TENSION LABEL WITH MIL SPEC MS90387-3	037489
01	11-2-16	JEH	ABJ	JADE	RELEASED AT REV 01	4853

TITLE: CD, GS4MT-E

Customer/Military Drawing

ITEM REVISION NAME: R27580AA/03

DATASET FILE NAME: R27580AA_DS_TM27580B01/03A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: -

DRAWING NUMBER: TM27580B01

DRAWN BY	DATE	CHK	SCALE	SIZE
JEH	1-26-15	ABJ	1:2	B

SHT 1 OF 1