
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

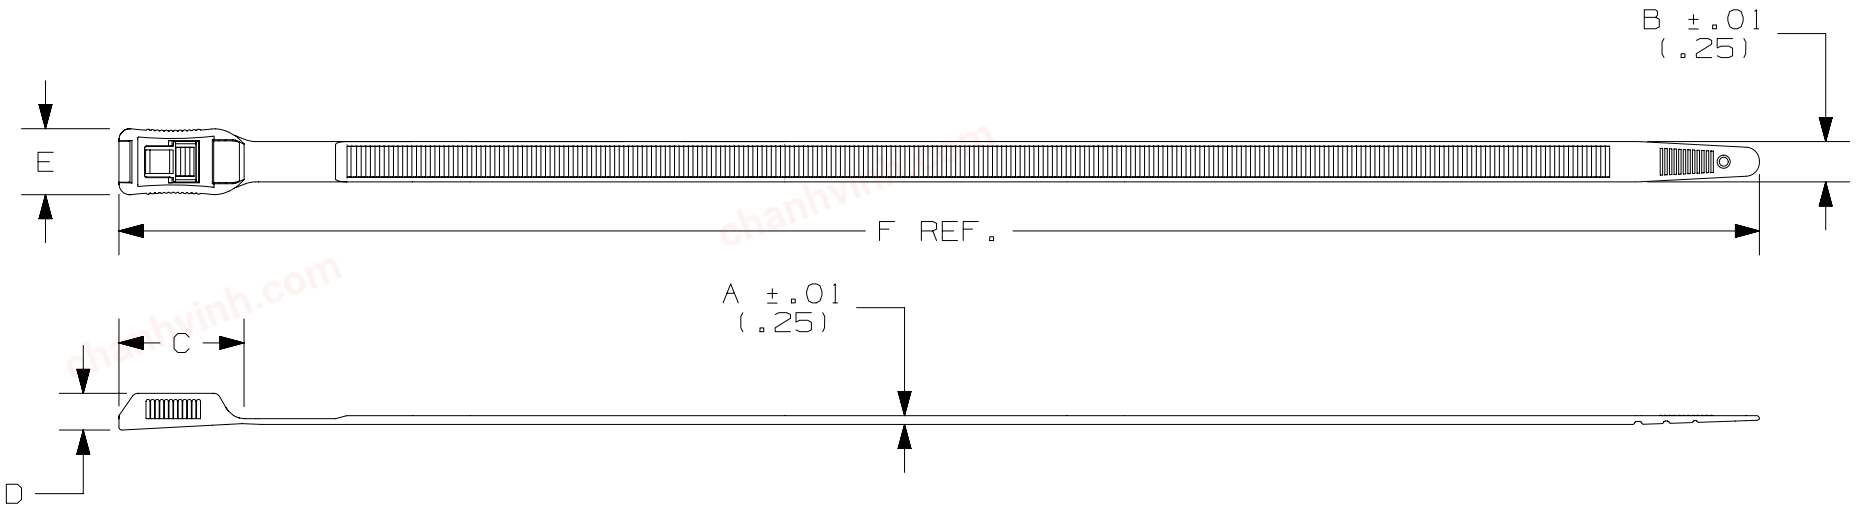

PANDUIT PART NO.	BUNDLE DIA. MIN. in (mm)	BUNDLE DIA. MAX. in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE* lbs. (N)	CROSS SECTION	WEIGHT 100 pcs lbs (g)
HV965	.39 (10)	2.6 (65)	.076 (1.9)	.350 (8.9)	1.093 (27.7)	.318 (8.0)	.571 (14.5)	10.43 (265)	160 (710)	LIGHT HEAVY	1.02 (462)
HV9100	.39 (10)	3.9 (100)	.076 (1.9)	.350 (8.9)	1.093 (27.7)	.318 (8.0)	.571 (14.5)	14.43 (367)	160 (710)	LIGHT HEAVY	1.36 (617)
HV9150	.39 (10)	5.9 (150)	.076 (1.9)	.350 (8.9)	1.093 (27.7)	.318 (8.0)	.571 (14.5)	20.65 (525)	160 (710)	LIGHT HEAVY	1.84 (845)
HV9250	.39 (10)	9.8 (250)	.076 (1.9)	.350 (8.9)	1.093 (27.7)	.318 (8.0)	.571 (14.5)	33.12 (841)	160 (710)	LIGHT HEAVY	2.85 (1295)

* PER SAE AS23190

CONFORMS TO EN50146
-MINIMUM INSTALLATION TEMP: -25°C
-MAXIMUM APPLICATION TEMP: 85°C
-MINIMUM APPLICATION TEMP: -60°C
-MINIMUM LOOP TENSILE STRENGTH: 710N
-FLAME APPLICATION TIME: 10s

DIMENSIONS IN PARENTHESIS ARE IN METRIC

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
05	5/27/16	BWG	MPH	JADE	UPDATED TITLE BORDER.	009768/00
04	10/31/06	ERW			ADDED EN50146 NOTES	27504/04

TITLE: HYPER-V IN-LINE TIE

CUSTOMER DRAWING

ITEM REVISION NAME: 10B015RF/00

DATASET FILE NAME: 10B015RF_DC/00 SS-27504_REV05

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .1 .XXX ± .02
.XX ± .02 ANGLES ± 5°

THIRD ANGLE PROJECTION

MATERIAL: NYLON 6.6

DRAWING NUMBER: SS-27504

DRAWN BY	DATE	CHK	SCALE	SHT	SIZE
MDS	4/07/06	FAB	NONE	SHT 1 OF 1	A