

chanhvinh.com


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	RECOMMENDED FASTENER	'A' REF	'B' REF	'C' REF	'D'	'E'	'F' REF	'G'	WEIGHT lbs [g] per 100 pcs	USE WITH CABLE TIE
HVTM-06-__	M6 SCREW	.81 [20.6]	.68 [17.3]	.41 [10.4]	.40 [10.2]	.11 [2.8]	.21 [5.3]	.24 [6.1]	.36 [165]	HV , IT

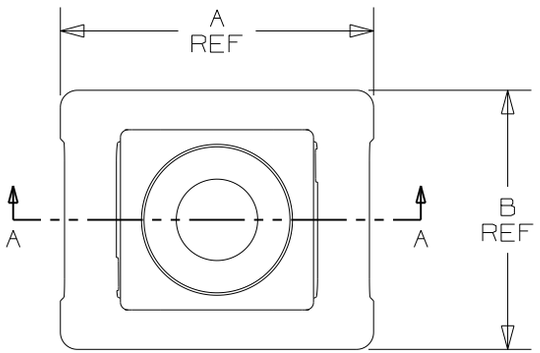


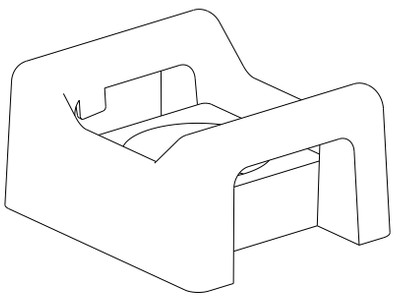


NOTES:
1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.



ISOMETRIC
1:1

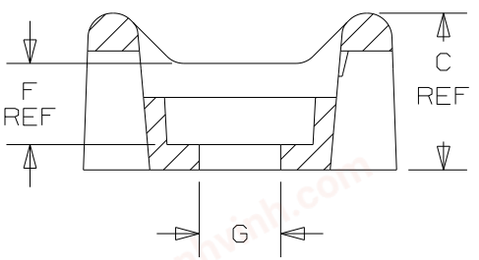

SECTION A-A

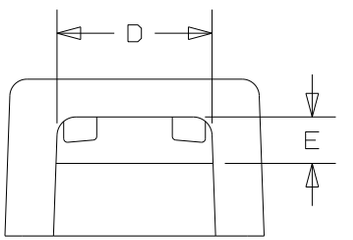

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS G03597JS_DC_G00239MA_04/00

PANDUIT CORP. TINLEY PARK, ILLINOIS

HYPER-V TIE MOUNT (HVTM_____)

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ±0.05 [1.3] (.XXX) ±0.010 [0.25]
(.XX) ±0.02 [0.5] ANGLES ±5°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY KLN

DATE 02-07-06

CHK'D

MAT'L: NYLON 6/6 WEATHER RESISTANT BLACK

SCALE 2:1

DRAWING NO. GB0239MA

DWG A

SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN - R		CUST	SUP	
4	2/01/11	BWG	MJVE	REMOVED HVTM-05 AND HVMT3S10.	GB0239MA	4	PBC		