

chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

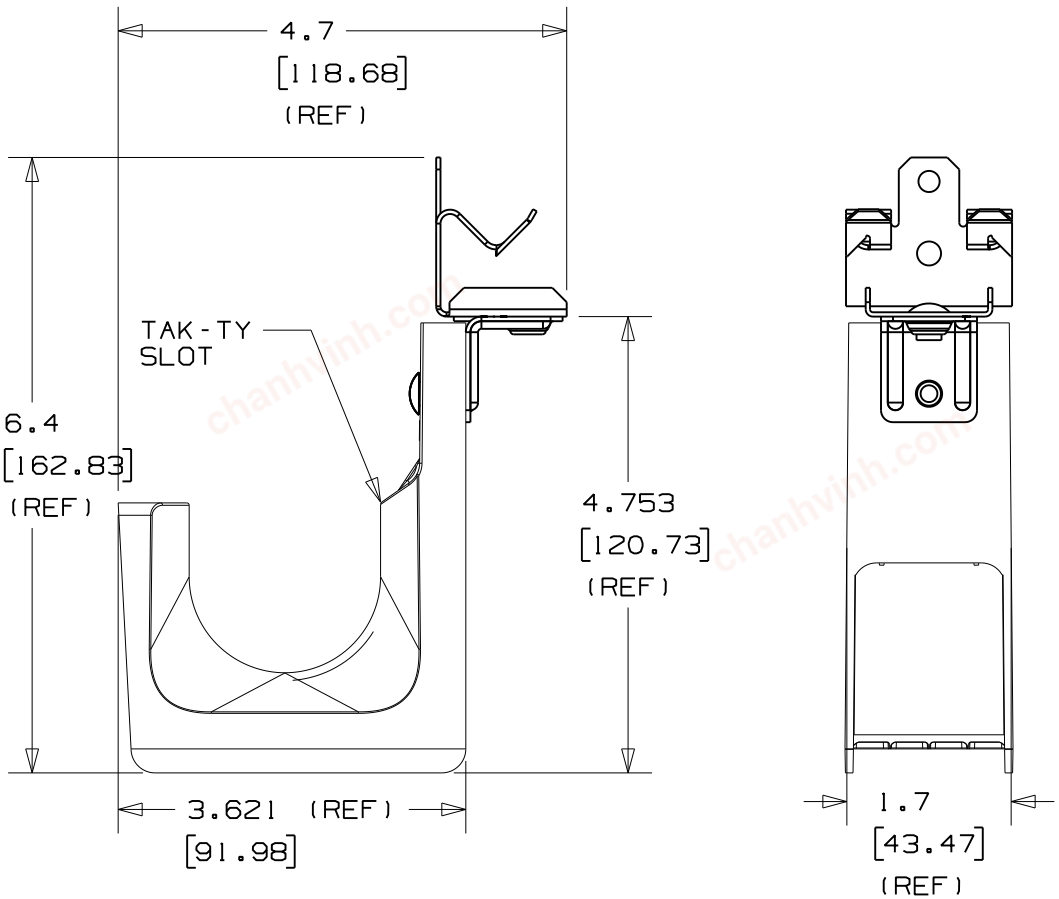

PANDUIT PART NO.	FLANGE THICKNESS	WEIGHT 10pcs lbs (g)
JP2HBC25RB-___	0.125 - 0.25 (3.18 - 6.35)	2.66 (1206)
JP2HBC50RB-___	0.3125 - 0.50 (7.94 - 12.7)	
JP2HBC75RB-___	0.5625 - 0.75 (14.29 - 19.05)	

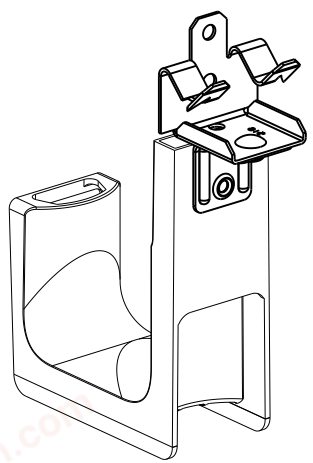

NOTES:
1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
2. HOOK MATERIAL: NYLON 6/6
   ANGLE BRACKET MATERIAL: PRE-GALVANIZED STEEL
   RIVET MATERIAL: ALUMINUM
   CLAMP MATERIAL: SPRING STEEL
3. PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM OF 2" (50.8) DIAMETER BUNDLE. MAXIMUM RECOMMENDED STATIC LOAD: 30 lbs.
4. PRODUCT INCORPORATES FEATURES ALLOWING USER TO RETAIN CABLE BUNDLES IN J-PRO J-HOOK WITH TAK-TY CABLE TIES UP TO 3/4" WIDE.
5. PRODUCT MARKINGS:
   cULus logo and statement:
   "SUITABLE FOR USE IN AIR HANDLING SPACES IN ACCORDANCE WITH SECTION 300-22 (C) & (D) OF THE NATIONAL ELECTRIC CODE."
   ULC logo and statement:
   "IN ACCORDANCE WITH CAN/ULC S-102.2-10 IN SINGLE UNITS OR PAIRS, 4 ft (1220mm) MIN. SPACING, FSR=0, SDC=35."

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	11/13/2012	DBLA	GGC	KLN	INITIAL RELEASE	GAECN00229

TITLE
J-PRO J-HOOK WITH 360° HAMMER-ON BEAM CLAMP (JP2HBC__-RB-___)
CUSTOMERDRAWING

ITEM REVISION NAME: 121031AK/00
DATASET FILE NAME: 121031AK_DC_C11010/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .1 [2.54] .xxx ± .005 [.127]
.xx ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTE 2

DRAWING NUMBER: C11010

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
DBLA	11/13/2012	KLN	NONE		A

D10100DA/12