

chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	FLANGE THICKNESS	WEIGHT 10pcs lbs (g)
JP4SBC50RB-___	UP TO 0.50 [12.7]	6.36 (2884)

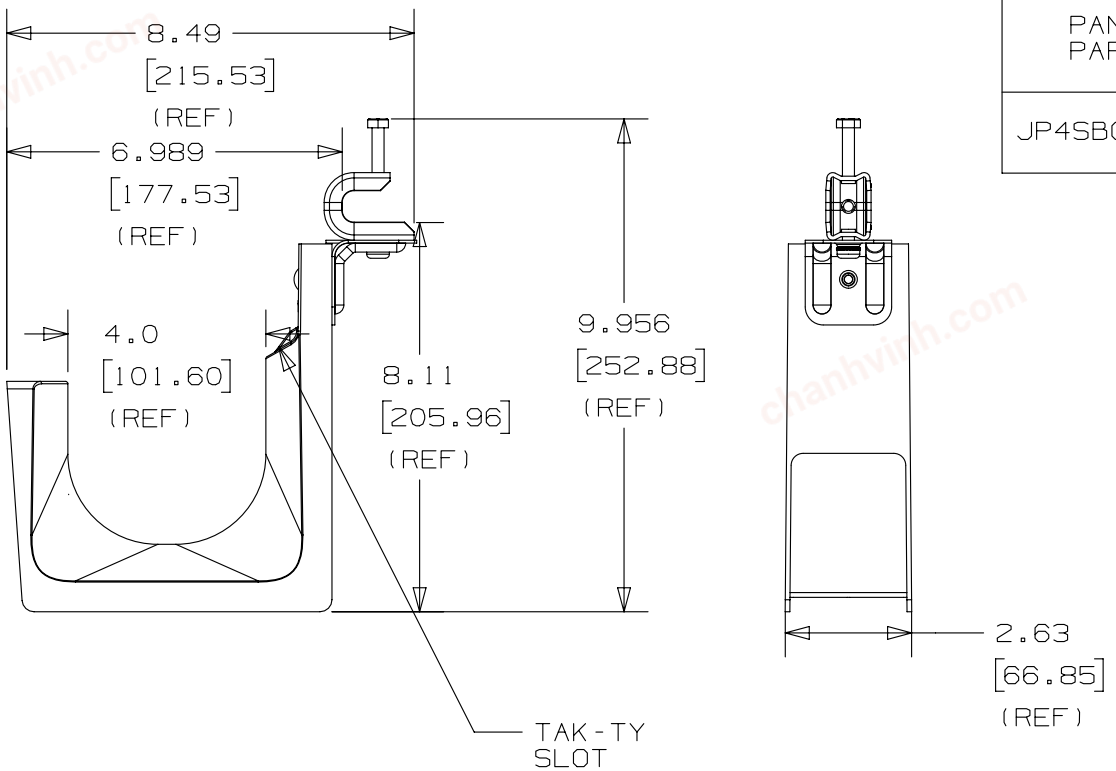

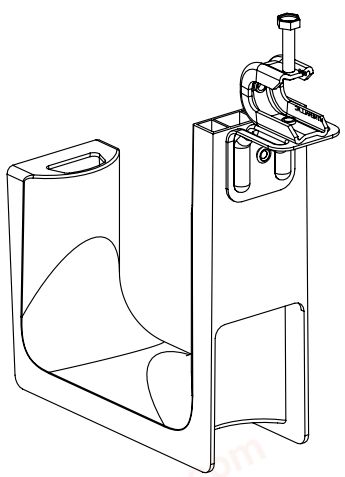

NOTES:
1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
2. HOOK MATERIAL: NYLON 6/6
   ANGLE BRACKET MATERIAL: PRE-GALVANIZED STEEL
   RIVET MATERIAL: ALUMINUM
   CLAMP MATERIAL: PLATED STEEL
   BOLT/WASHER MATERIAL: ZINC PLATED STEEL
3. PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM OF 4" (19.05) DIAMETER BUNDLE. MAXIMUM RECOMMENDED STATIC LOAD: 50 lbs.
4. PRODUCT INCORPORATES FEATURES ALLOWING USER TO RETAIN CABLE BUNDLES IN J-PRO J-HOOK WITH TAK-TY CABLE TIES UP TO 3/4" WIDE.
5. PRODUCT MARKINGS:
   cULus logo and statement:
   "SUITABLE FOR USE IN AIR HANDLING SPACES IN ACCORDANCE WITH SECTION 300-22 (C) & (D) OF THE NATIONAL ELECTRIC CODE."
   ULC logo and statement:
   "IN ACCORDANCE WITH CAN/ULC S-102.2-10 IN SINGLE UNITS , MINIMUM 4 ft (1220mm) MIN. SPACING, FSR=0, SDC=35."

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	1/25/2013	DBLA	GGC	KLN	INITIAL RELEASE	GAECN00419

D10100DA/12

TITLE
J-PRO J-HOOK WITH 360° SCREW-ON BEAM CLAMP (JP4SBC50RB-___)
CUSTOMER DRAWING

ITEM REVISION NAME: 12I031AP/00
DATASET FILE NAME: 12I031AP_DC_C11015/00A

PANDUIT™

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTE 2

DRAWING NUMBER: C11015

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
DBLA	1/25/2013	KLN	NONE		A