
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MATERIAL	HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
PLATING	ELECTRO-TIN
WIRE SIZE	8 AWG
WIRE TYPE	STRANDED COPPER; CLASS B: COMPACT, COMPRESSED OR CONCENTRIC, CLASS C: CONCENTRIC
WIRE STRIP LENGTH	5/8 IN
STUD SIZE	1/4 IN.
UL LISTED WIRE CONNECTOR	YES, FOR APPLICATIONS UP TO 35KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
UL TEMPERATURE RATING	90° C
CSA CERTIFIED WIRE CONNECTOR	YES
PANDUIT COLOR CODE ON BARREL	RED
PANDUIT DIE INDEX NO. ON BARREL	P21
ALTERNATE INDUSTRY DIE INDEX NO. () ON BARREL	N/A

DIMENSIONS IN BRACKETS ARE MILLIMETERS

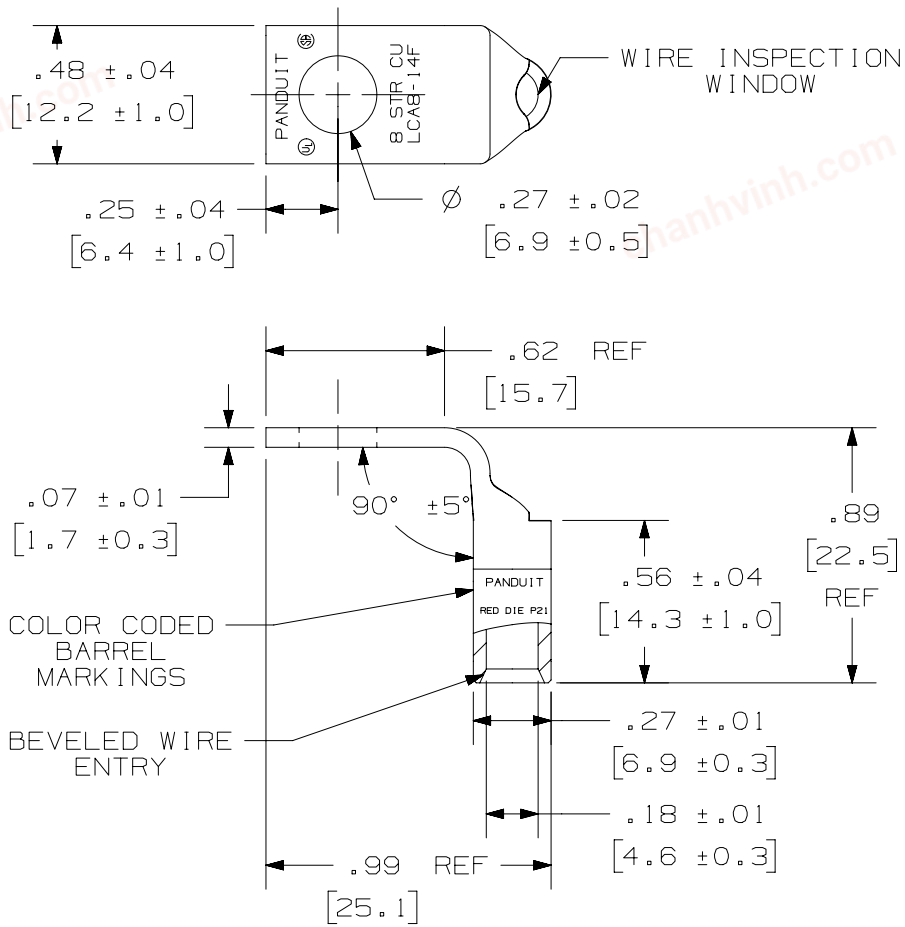

LISTED
WIRE CONNECTOR

CERTIFIED

PART NUMBER: LCA8-14F-L

TITLE: COPPER LUG - ONE HOLE, STANDARD BARREL 90°°ANGLE TONGUE

CUSTOMER DRAWING

ITEM REVISION NAME: N10881HN/00

DATASET FILE NAME: N10881HN-DC/00A

THIRD ANGLE PROJECTION

MATERIAL: SEE TABLE

DRAWING NUMBER: N10881HN-DC

DRAWN BY	DATE	CHK	SCALE	SIZE
DRL	9-03	JAC	NONE	A

SHEET 1 OF 1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	2-13-25	JHNU	JHNU	JSUN	C. REVISED TONGUE LENGTH DIMENSION TO REFERENCE B. REVISED DWG NUMBER: N10881HN-DC WAS LCA8-14F-CUST A. CONVERTED TO NX	011114

A_SIZE_CUSTOMER_LAND