
chanhvinh.com


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| | |
|---|---|
| Material | High Conductivity Seamless Copper Tube |
| Plating | Electro-Tin |
| Wire Size | 2/0 AWG |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric |
| Wire Strip Length | 1-1/16 in. |
| Stud Size | 1/2 in. |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating | 90° C |
| C.S.A Certified Wire Connector | Yes |
| Panduit Color Code on Barrel | BLACK |
| Panduit Die Index No. on Barrel | P45 |
| Alternate Industry Die Index No. ( ) on Barrel | (13) |

CERTIFIED

LISTED
Wire Connector

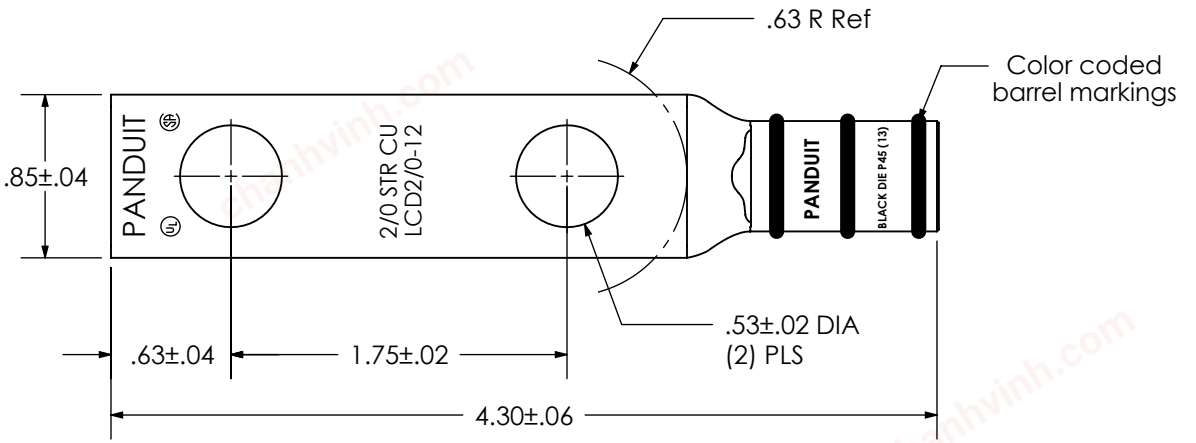

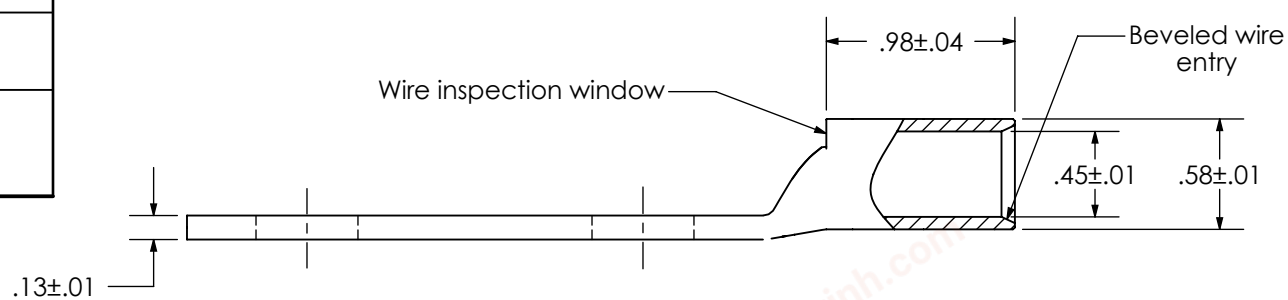
| REV | DATE | BY | CHK | DESCRIPTION | ECN | -R | SUP |
|---|---|---|---|---|---|---|---|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| 01 | 7/12 | JHNU | JHNU | REMOVED NAVY NUMBER | N10884TM-LCD2/0-12-CUST | RGB | RGB |

PANDUIT CORP. TINLEY PARK, ILLINOIS

LCD2/0-12-X
Copper Lug - Two-Hole, Standard Barrel

| SCALE | DRAWING NO / CAD FILE |
|---|---|
| N/A | LCD2_0-12-CUST |