

chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

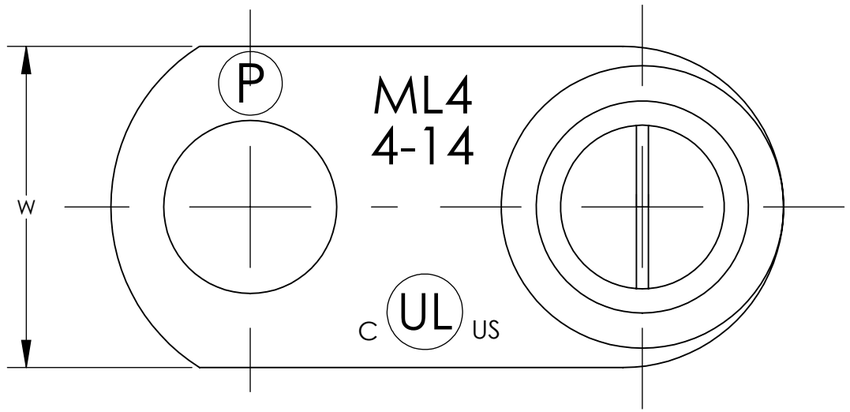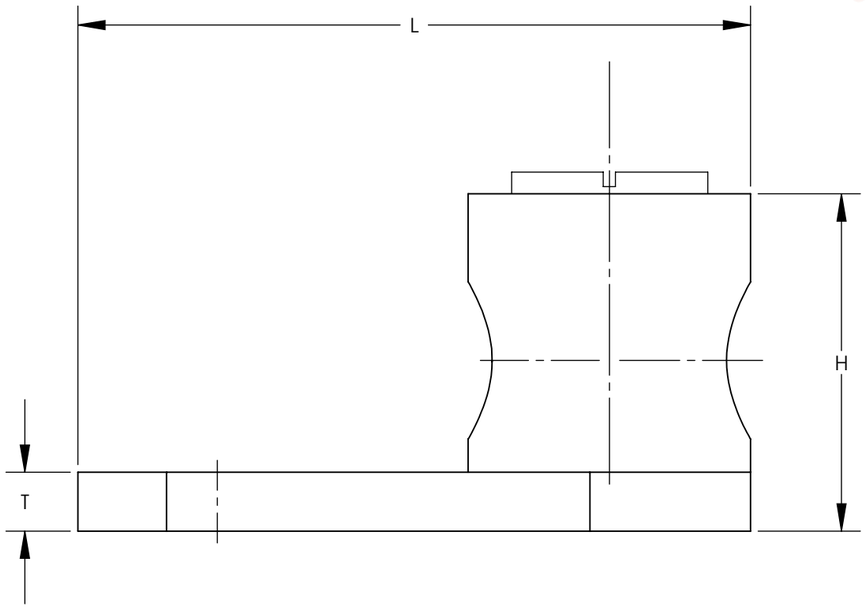


NOTES:

1. PARTS ARE (c UL us) LISTED.
2. FOR COPPER WIRE ONLY
3. PANDUIT PART NUMBERS WITH A "T" ARE TIN PLATED
4. PKG QTY: Q = 25
   L = 50
   C = 100
   D = 500
5. SEE LABEL FOR SCREW TURQUE VALUES

| PANDUIT PART NUMBER | CONDUCTOR RANGE | APPROXIMATE DIMENSIONS +/- .02 | | | | | INSTALLATION TOOL |
|---|---|---|---|---|---|---|---|
| | | BOLT SIZE | W | H | T | L | |
| ML8-CY | 14 SOL. - 8 STR. | 3/16 | 0.38 | 0.42 | 0.08 | 0.81 | SLOT SCREWDRIVER |
| ML8T-CY | 14 SOL. - 8 STR. | 3/16 | 0.38 | 0.42 | 0.08 | 0.81 | |
| ML4-CY | 14 SOL. - 4 STR. | 1/4 | 0.54 | 0.55 | 0.09 | 1.11 | |
| ML4T-CY | 14 SOL. - 4 STR. | 1/4 | 0.54 | 0.55 | 0.09 | 1.11 | |
| ML1/0-LY | 14 SOL. - 1/0 STR. | 5/16 | 0.73 | 0.79 | 0.09 | 1.57 | 1/4" HEX WRENCH |
| ML1/0T-LY | 14 SOL. - 1/0 STR. | 5/16 | 0.73 | 0.79 | 0.09 | 1.57 | |
| ML250-QY | 6 STR. - 250kcmil | 3/8 | 0.94 | 1.06 | 0.12 | 1.94 | |
| ML250T-QY | 6 STR. - 250kcmil | 3/8 | 0.94 | 1.06 | 0.12 | 1.94 | |

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|---|---|---|---|---|---|---|
| 06 | 2/13 | JHNU | JHNU | RGB | REVISED TITLE BLOCK | N41569BB-C41569 |

TITLE: ML SERIES COPPER MECHANICAL LUGS CUSTOMER DRAWING

ITEM REVISION NAME: C41569/06

DATASET FILE NAME: C41569/06.SLDDRW

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ±
.XX ±
.XXX ±
ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: C41569_11

| DRAWN BY | DATE | CHK | SCALE | SHEET | SIZE |
|---|---|---|---|---|---|
| JHNU | 7/06 | JHNU | NONE | SHEET 1 OF 1 | B |