


chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MAXIMUM BUNDLE DIAMETER	PACKAGE QUANTITY	LENGTH = L ±.3 [7]
MLT2LH-LP	2.0" [51]	50	7.9" [201]
MLT4LH-LP	4.0" [102]	50	14.3" [362]
MLT6LH-LP	6.0" [152]	50	20.5" [521]
MLT8LH-LP	8.0" [203]	50	26.8" [679]

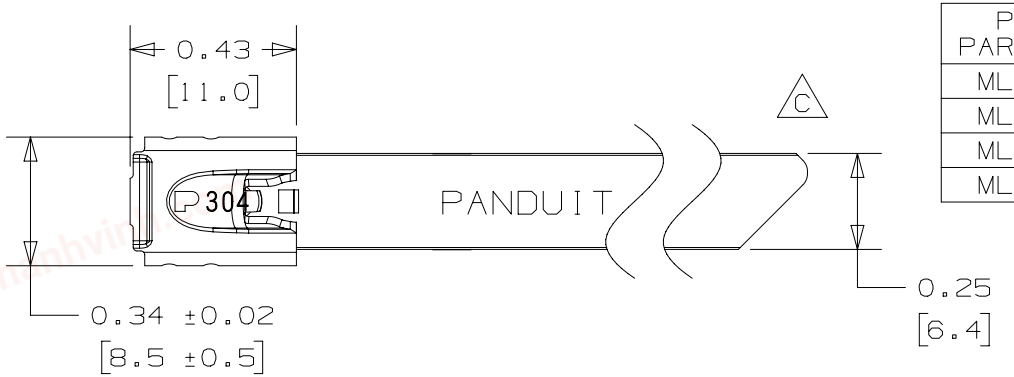

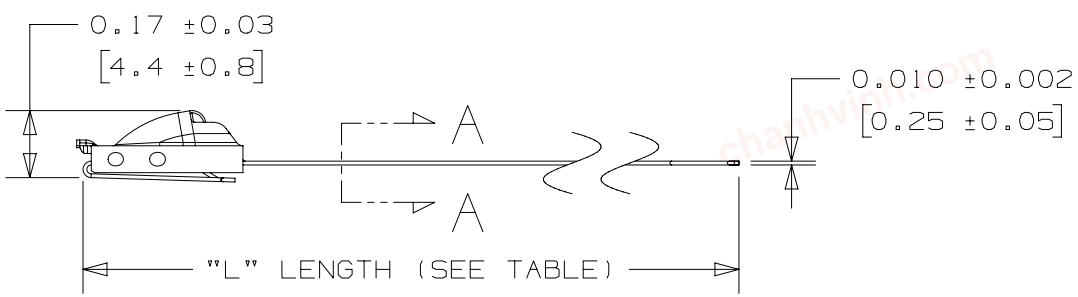

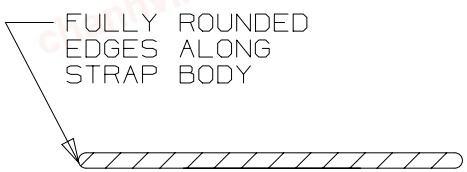

SECTION A-A
SCALE 8:1

NOTES:
1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, AND HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 250 LBS. (1112 NEWTONS) WHEN TESTED ON A 1 1/2" MANDREL
3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
   .XXX = ±.010 [.25] .XX = ±.02 [.5]
   .X = ±.03 [.8] ANGLES = ±2°

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
5	09.30.15	BDK	SKB	RGRO	C. ADDED NEW TIP CONFIGURATION	N41126BS_DC

TITLE
METAL LOCKING TIE LIGHT - HEAVY SERIES 304 STAINLESS
CUSTOMER DRAWING

ITEM REVISION NAME: N41126BS/05
DATASET FILE NAME: N41126BS/05

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: 304 STAINLESS STEEL

DRAWING NUMBER: N41126BS_DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JAMB	6/03	DPN	2:1		A