
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

	PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	LENGTH +/-.3" [7]
Ⓑ	MLT2EH-LP316	2" [51]	50	11.8" [300]
	MLT4EH-LP316	4" [102]	50	17.1" [434]
	MLT6EH-LP316	6" [152]	50	23.4" [594]
	MLT8EH-LP316	8" [203]	50	29.7" [754]

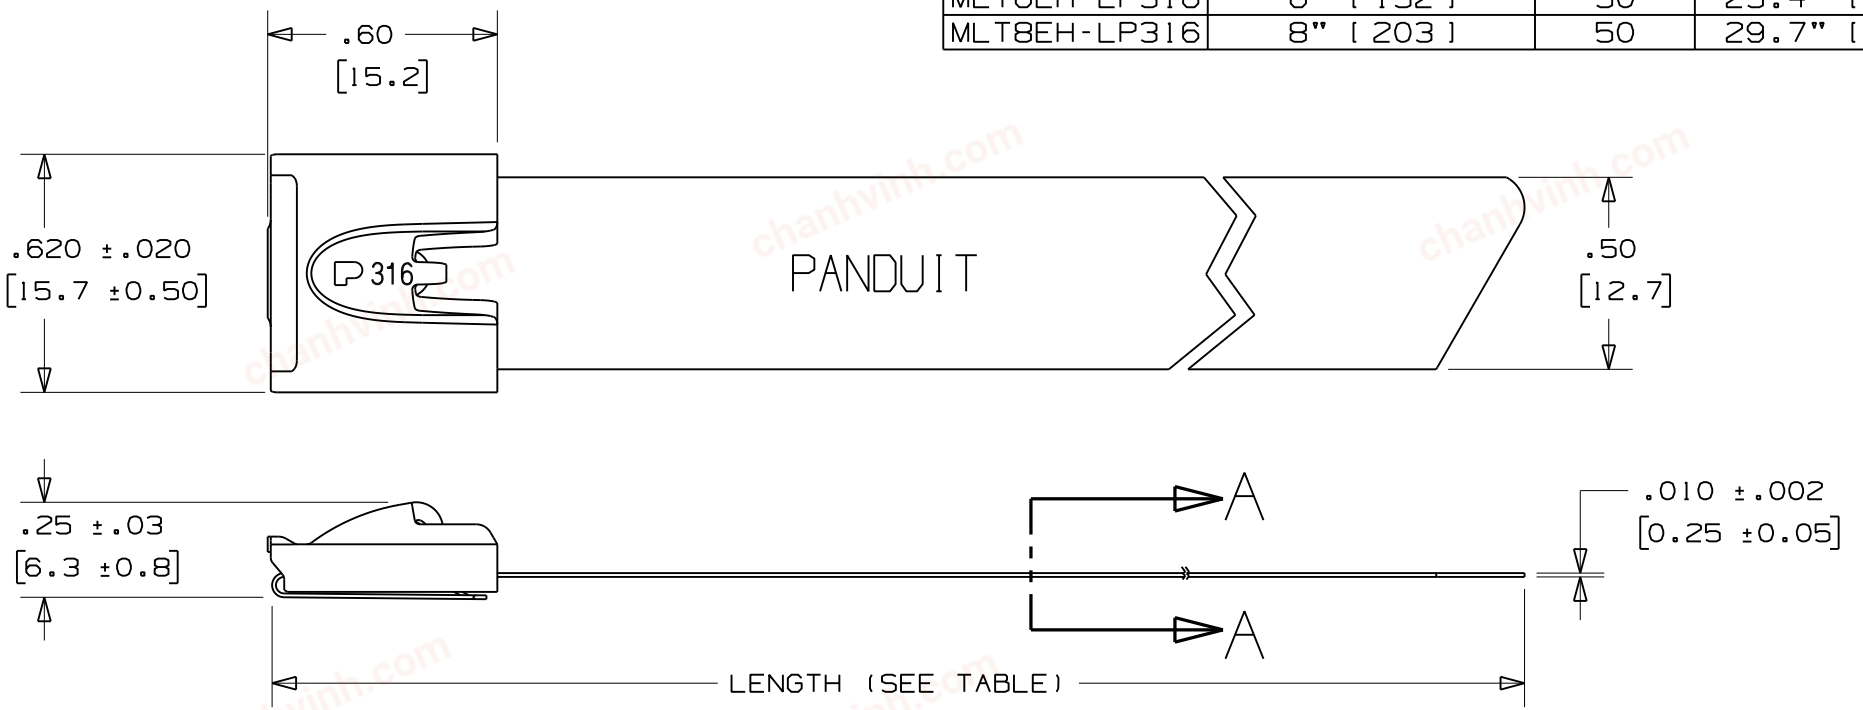

NOTES:
1. APPLICATION TOOLS - ST3MT & RT2HT
2. MINIMUM LOOP TENSILE STRENGTH - 600 LBS. (2670 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. BRACKETS [ ] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:
   .XXX = ±.010 [.25]
   .XX = ±.02 [.5]
   .X = ±.03 [.8]
   ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

Ⓐ FULLY ROUNDED EDGES ALONG STRAP BODY



SECTION A-A
SCALE: 4x

N41156BS_DC/02A

REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST
02A	10/08	JAMB	SKB	ORIG CAD FILE SPEC WAS S41156_02 NOTE 1: APPLICATION TOOL RT1HT REPLACED BY RT2HT			
02	9/05	JAMB	EJD	Ⓑ ADDED PART NO. MLT2EH-LP316 TO TABLE	SS00061	---	---
01	8/04	JAMB	DPN	Ⓐ REMOVED "AISI NO.1 FULL RADIUSED" & REPLACED WITH "FULLY ROUNDED"	11907	CCH	JJB
00	1/04	JAMB	DPN	RELEASED	11307	CCH	JJB

PANDUIT CORP. TINLEY PARK, ILLINOIS

METAL LOCKING TIE EXTRA HEAVY DUTY
316 STAINLESS STEEL -
CUSTOMER DRAWING

DRAWN BY	CHK'D	SCALE	DRAWING NO.
JAMB	DPN	2x	N41156BS_DC