

chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MAX BUNDLE DIAMETER	"L" LENGTH ±.3" [7]
MLTC2H-LP316	2" [51]	7.9" [201
MLTC2.7H-LP316	2.7" [69]	10.15" [258]
MLTC4H-LP316	4" [102]	14.3" [362]
MLTC6H-LP316	6" [152]	20.5" [521]
MLTC8H-LP316	8" [203]	26.8" [679]
MLTC10H-LP316	10" [254]	33.0" [838]

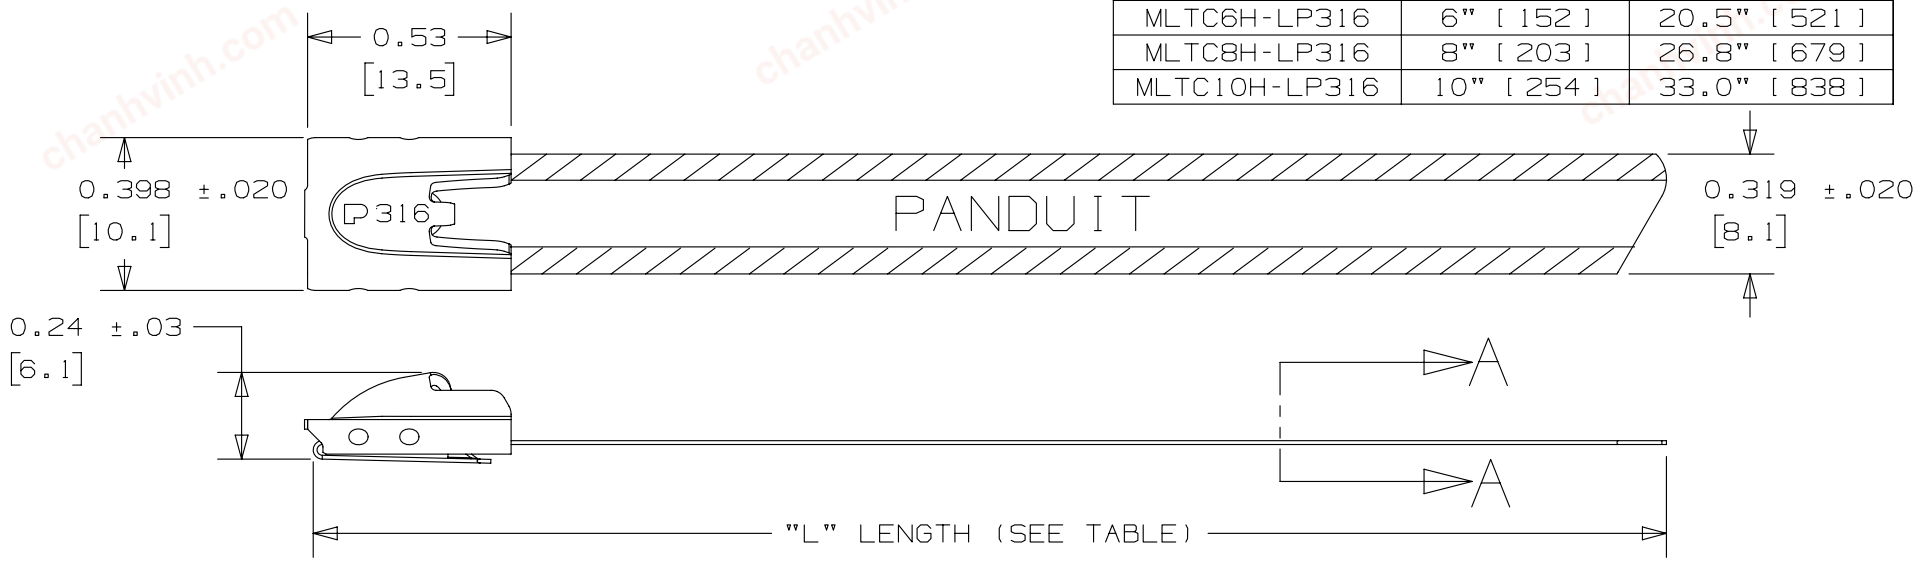

NOTES:
1. APPLICATION TOOLS - GS4MT, PPTMT, HTMT, & ST3MT
2. MINIMUM LOOP TENSILE STRENGTH - 250 lbs. [1112 NEWTONS]
3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
   .X = ±.030 [.8] .XX = ±.020 [.5]
   .XXX = ±.010 [.25]
5. MATERIAL: 316 STAINLESS STEEL
6. COATING: NYLON 11
   COATING THICKNESS: .003"/.005" [0.08-0.13] PER SIDE

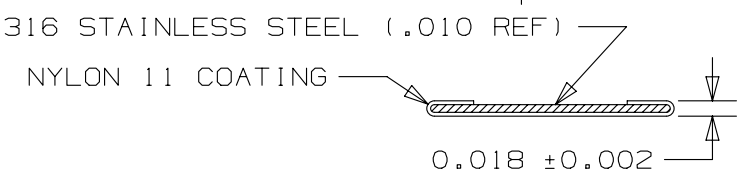

SECTION A-A
SCALE 4:1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
08A	7/14	JHNU	SKB	RGB	ADDED .010 REF TO SECTION A-A ADDED THICKNESS DIMENSION TO SECTION A-A	SSECN01155
07A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01042
06A	2/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----

TITLE
SELECTIVELY COATED METAL LOCKING TIE
HEAVY SERIES WITH NYLON 11 COATED BODY
CUSTOMER DRAWING

ITEM REVISION NAME: N41140BS/08
DATASET FILE NAME: N41140BS_DC/08A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: N41140BS_DC

DRAWN BY	DATE	CHK	SCALE	SIZE
JAMB	2/12	DPN	2:1	A

SHT 1 OF 1