


chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

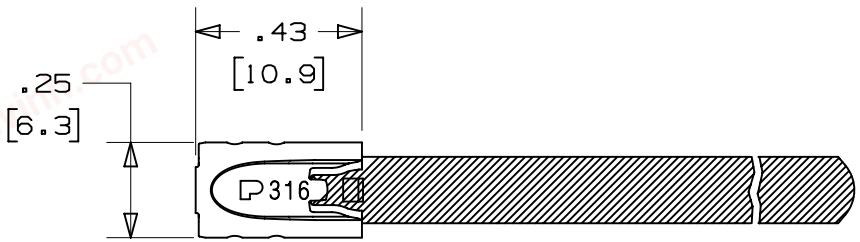

PANDUIT PART NO.	MAX BUNDLE DIA.	PACKAGE QTY	LENGTH L ±.3 [7]
MLTFC1.5S-CP316	1.5" [38]	100	6.2" [157]
MLTFC2.5S-CP316	2.5" [64]	100	9.2" [234]
MLTFC3.4S-CP316	3.4" [86]	100	12.2" [310]
MLTFC5.4S-CP316	5.4" [137]	100	18.2" [462]

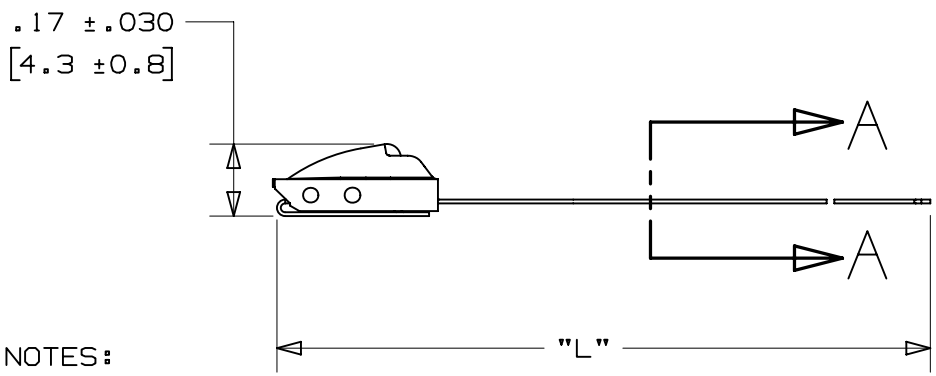

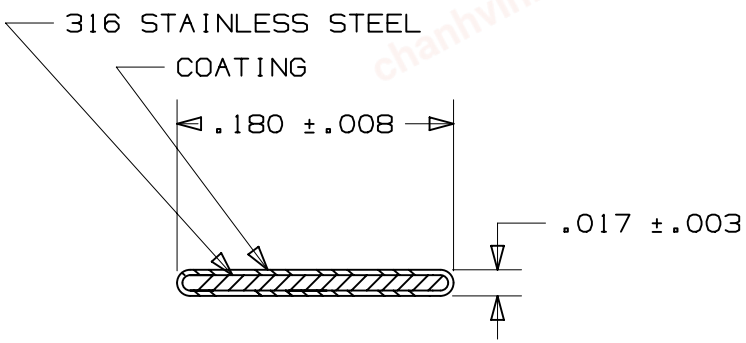

SECTION A-A
SCALE:8x

NOTES:

1.) APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,ST3MT,HTMT
2.) MINIMUM LOOP TENSILE STRENGTH - 100 LBS. (445 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3.) BRACKETS [ ] DENOTES DIMENSION IN MILLIMETERS, AND ARE FOR REFERENCE ONLY
4.) TOLERANCES:
.XXX = ±.010 [.25]
.XX = ±.02 [.5]
.X = ±.03 [.8]
ANGLES = ±2°
5.) MATERIAL: 316 STAINLESS STEEL
6.) COATING - POLYESTER
COATING THICKNESS: .002 MIN./.005 MAX.PER SIDE

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02	02.24.15	BDK	SKB	RGRO	UPDATED TITLE BLOCK AND BORDER	N41273BS_DC

TITLE
METAL LOCKING TIE - COATED STANDARD SERIES
CUSTOMER DRAWING

ITEM REVISION NAME: N41273BS/02
DATASET FILE NAME: N41273BS/02

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

PANDUIT

MATERIAL: 316 STAINLESS STEEL

DRAWING NUMBER: N41273BS_DC

DRAWN BY	DATE	CHK	SCALE	SIZE
JAMB	02.24.15	EJD	2:1	A

SHT 1 OF 1

D10100DA/16