

chanhvinh.com


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. TO BE USED WITH PANDUIT METAL BANDING MBH-MR & MBH-TLR.
2. APPLICATION TOOL: GS4MT, ST2MT, PPTMT, ST3MT, (A) OR HTMT.
3. TOOL TENSION SETTING: 4 TO 8 (GS4MT AND PPTMT ONLY)
4. DIMENSIONS IN [ ] ARE MILLIMETERS.
5. (B) MINIMUM LOOP TENSILE STRENGTH: 250 LBS (1112 N)
6. TOLERANCES: .X = ±.030[.762]
   .XX = ±.020[.508]
   .XXX = ±.010[.254]
   ANGLES = ±2°

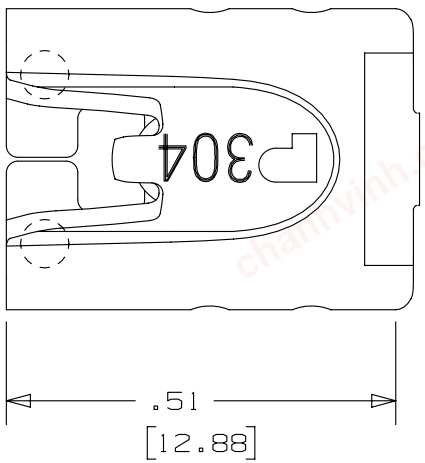



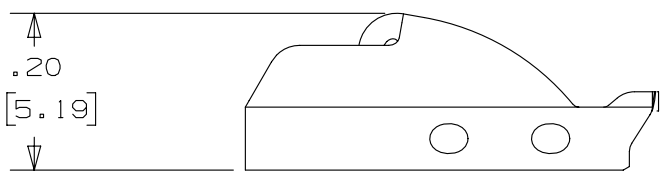

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01	10/03	BRH	DPN	JJB	(A) ADDED ST3MT TO APPLICATION TOOL NOTE (B) ADDED TENSILE STRENGTH NOTE	11162
00	11/02	JAMB	DPN	JJB	DRAWING RELEASED	10401

TITLE

METAL TIE HEAD HEAVY PART NUMBER MTHH-C

CUSTOMER DRAWING

ITEM REVISION NAME: N41130BS/02

DATASET FILE NAME: N41130BS/02

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

PANDUIT

MATERIAL: 304 STAINLESS STEEL

DRAWING NUMBER: N41130BS_DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JAMB	DPN	11/02	4;1		A