

chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


| PANDUIT PART NUMBER* | NO. OF BUNDLES | 'G' REF | REC. FAST. | 'B' REF | 'L' ±.063 | 'W' | 'T' | 'H' REF | USE WITH CABLE TIE | WEIGHT lbs/[g] 100 pcs. |
|---|---|---|---|---|---|---|---|---|---|---|
| MTP1S-E6 | 1 | 0.147 | #6 SCR. | 0.220 | 1.75 | 0.500 | 0.125 | 1.25 | M, I, S | 0.3/[136.1] |
| MTP2S-E6 | 2 | | | | 3.00 | | | 2.50 | | 0.6/[272.2] |
| MTP3S-E6 | 3 | | | | 4.25 | | | 3.75 | | 0.8/[362.9] |
| MTP4S-E6 | 4 | | | | 5.50 | | | 5.00 | | 1.1/[499.0] |
| MTP5S-E6 | 5 | | | | 6.75 | | | 6.25 | | 1.3/[598.7] |
| MTP1S-E10 | 1 | 0.205 | #10 SCR. | 0.305 | 1.75 | | | 1.25 | | 0.3/[136.1] |
| MTP2S-E10 | 2 | | | | 3.00 | | | 2.50 | | 0.6/[272.2] |
| MTP3S-E10 | 3 | | | | 4.25 | | | 3.75 | | 0.8/[362.9] |
| MTP4S-E10 | 4 | | | | 5.50 | | | 5.00 | | 1.0/[453.6] |
| MTP5S-E10 | 5 | | | | 6.75 | | | 6.25 | | 1.3/[598.7] |
| MTP1H-E6 | 1 | 0.147 | #6 SCR. | 0.220 | 2.09 | 0.625 | 0.203 | 1.50 | M, I, S, H | 0.8/[362.9] |
| MTP2H-E6 | 2 | | | | 3.59 | | | 3.00 | | 1.3/[598.7] |
| MPT3H-E6 | 3 | | | | 5.09 | | | 4.50 | | 1.8/[816.5] |
| MTP4H-E6 | 4 | | | | 6.59 | | | 6.00 | | 2.4/[1088.6] |
| MTP5H-E6 | 5 | | | | 8.09 | | | 7.50 | | 2.9/[1315.4] |
| MTP6H-E6 | 6 | | | | 9.59 | | | 9.00 | | 3.4/[1542.2] |
| MTP1H-E10 | 1 | 0.205 | #10 SCR. | 0.305 | 2.09 | | | 1.50 | | 0.7/[317.5] |
| MTP2H-E10 | 2 | | | | 3.59 | | | 3.00 | | 1.3/[598.7] |
| MTP3H-E10 | 3 | | | | 5.09 | | | 4.50 | | 1.8/[816.5] |
| MTP4H-E10 | 4 | | | | 6.59 | | | 6.00 | | 2.3/[1043.3] |
| MTP5H-E10 | 5 | | | | 8.09 | | | 7.50 | | 2.8/[1270.1] |
| MTP6H-E10 | 6 | | | | 9.59 | | | 9.00 | | 3.4/[1542.2] |

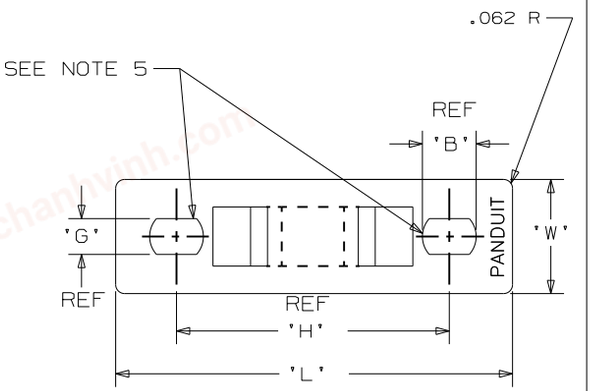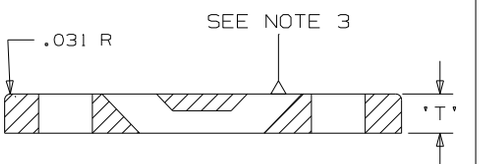


NOTES:
*1. SEE WWW.PANDUIT.COM FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.

2. PART NUMBER EXAMPLE:

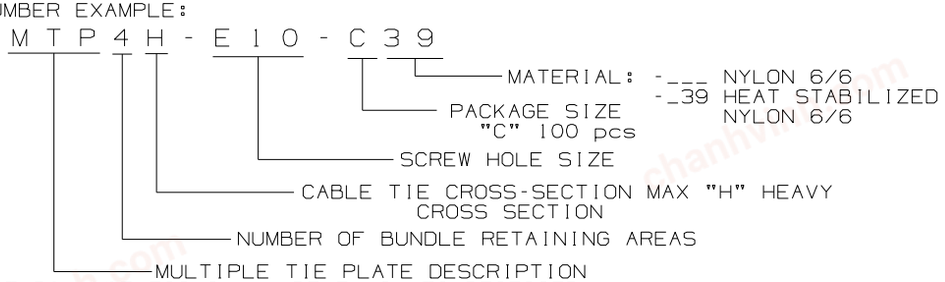


3. KNOCKOUT PIN WITNESS SHALL BE FLUSH TO RECESSED.

4. ENGRAVING PLACED ON THE TOP SURFACE ('PANDUIT" AS SHOWN) SHALL BE LOCATED ON THE ENDS OF THE PART AT A MAXIMUM HEIGHT OF 0.002.

5. SECURING HOLES FOR SCREWS OR BOLTS ARE AT EACH END OF PLATE AND BETWEEN EACH BUNDLE.

| REV | DATE | BY | CHK | DESCRIPTION | ECN - R | CUST | SUP |
|---|---|---|---|---|---|---|---|
| 6 | 8-03-12 | BWG | MPH | ADDED SECURING HOLES NOTE AND UPDATED NOTE 1 TO "PANDUIT.COM" AND "PART COLOR". | GB0239DF 6 | PBC | |

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS: 10B015DT_DC_GC0239DF_REV_06

PANDUIT CORP. TINLEY PARK, ILLINOIS

# MTP SERIES MULTIPLE TIE PLATE

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ±0.05 [1.3] (.XXX) ±0.010 [0.25]
(.XX) ±0.02 [0.5] ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

| DRAWN BY | MAT'L: | SCALE | DWG |
|---|---|---|---|
| CJG | SEE NOTE 2 | NONE | A |
| DATE 6/03/96 | CHK'D | DRAWING NO. GB0239DF | SIZE |