
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.01	C MIN	M ±.03	H ±.01
P12-6HDR	#6	.78 (19.81)	.31 (7.87)	.36 (9.14)	.62 (15.75)	.15 (3.81)
P12-8HDR	#8	.78 (19.81)	.31 (7.87)	.36 (9.14)	.62 (15.75)	.17 (4.32)
P12-10HDR	#10	.81 (20.57)	.37 (9.40)	.36 (9.14)	.62 (15.75)	.20 (5.08)
P12-14HDR	1/4"	.96 (24.38)	.52 (13.21)	.43 (10.92)	.70 (17.78)	.27 (6.86)
P12-56HDR	5/16"	.96 (24.38)	.52 (13.21)	.43 (10.92)	.70 (17.78)	.33 (8.38)
P12-38HDR	3/8"	1.04 (26.42)	.58 (14.73)	.48 (12.19)	.75 (19.05)	.39 (9.91)

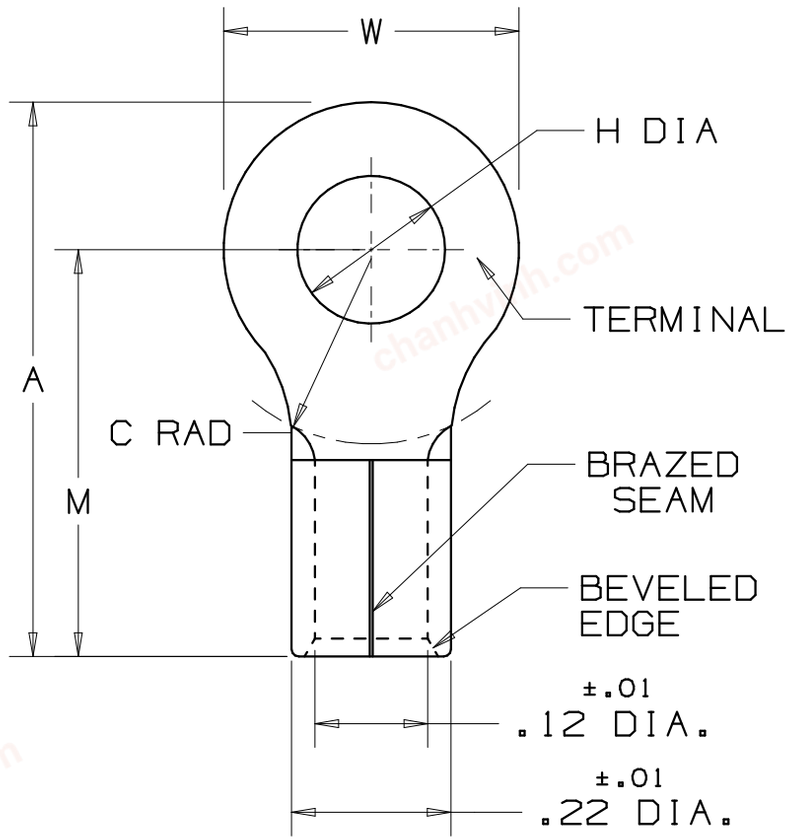

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
   A. 302° F (150° C) MAX. TEMP. RATING
   B. #16-12 AWG SOLID OR STRANDED COPPER WIRE
   C. 2000V MAX VOLTAGE RATING
2. MATERIAL: .050" (1.27) THK COPPER, TIN PLATED
3. PACKAGE QTY: STD. PKG. -L=50
   BULK PKG. -D=500
4. INSTALLATION TOOLS: CT-100, CT-200, CT-570, CT-1570
5. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
6. STRIP LENGTH - 9/32 $^{+1/32}_{-0}$

LISTED 587H E52164

CERTIFIED LR31212

A41210_05

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM
05	2/07	DAW	DAW	2000V. MAX RATING WAS 600V.	TR00111	LCA	TRO
04	1/01	KMD	SKB	CAD FILE SPEC. WAS N41210AA_PCD_03	08938	JAC	CCH
03	5/99	JKD		ADDED CT-1570 TOOL	07632		
02	7/95	MC		UPDATED NOTES AND DIMENSIONS	03437	LCA	KS

PANDUIT CORP. TINLEY PARK, ILLINOIS

#16-12 BARREL NON-INSULATED HEAVY DUTY RING TONGUE

DRAWN BY	CHK'D	SCALE	DRAWING NO.
DAW		N/A	A41210