
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

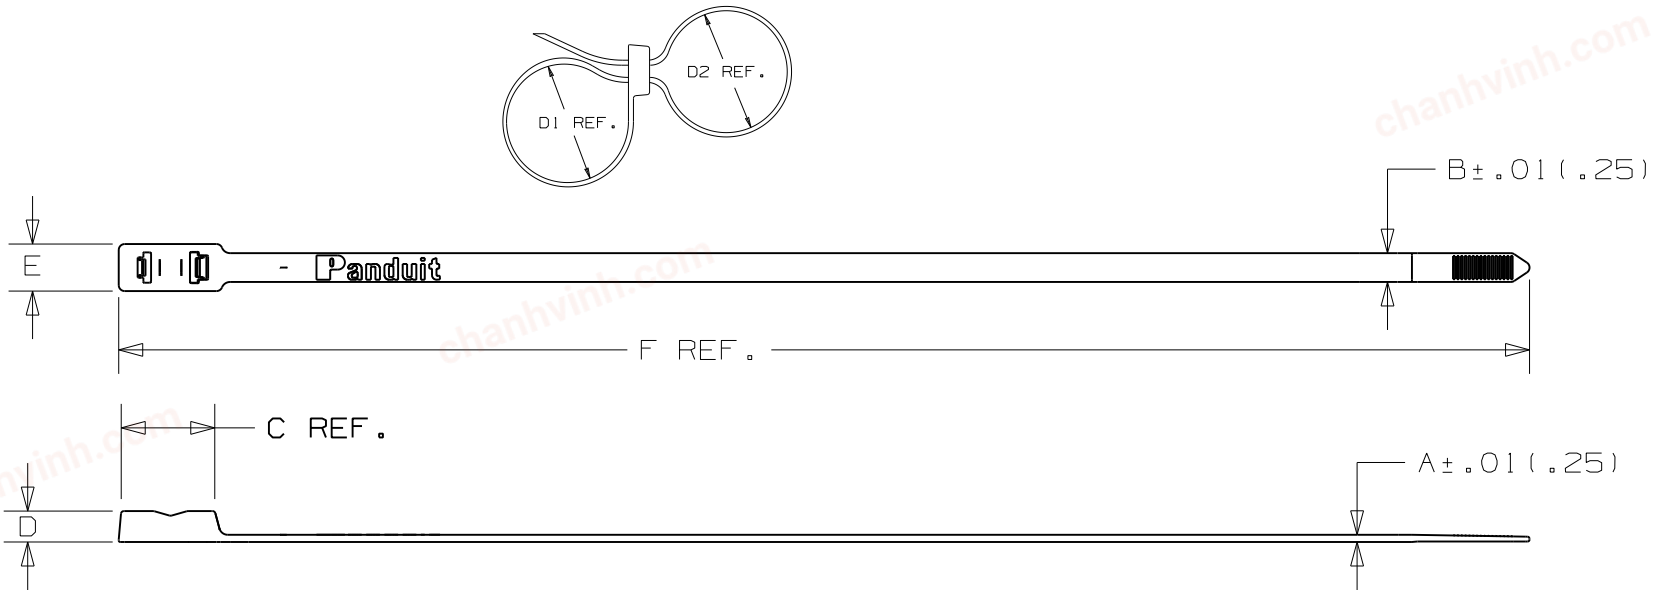

PANDUIT PART NO.	MAX. COMBINED BUNDLE DIA. D1 + D2 in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT lbs/100 pcs. (g)
PLB4H	3.6 (91)	.075 (1.91)	.300 (7.62)	.974 (24.74)	.322 (8.18)	.490 (12.45)	14.4 (366)	120 (534)	HEAVY	1.45 (660)

NOTES:
1. SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
2. PRODUCT IS RoHS COMPLIANT.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
5	12/17/09	JABO	BOBK	REMOVED PART FROM DRAWING	27268 5	BOBK	

WI0001CU/05-SS_27268.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

BOW - TY CABLE TIE
PLB SERIES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± - - - - (.XXX) ± .020 (.51)
(.XX) ± .02 (.5) ANGLES ± - - - -

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION.

DRAWN BY: JABO
DATE: 7/12/00
CHK'D: BOBK
MAT'L: NYLON 6.6
SCALE: NONE
DRAWING NO.: SS-27268
DWG SIZE: A