
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

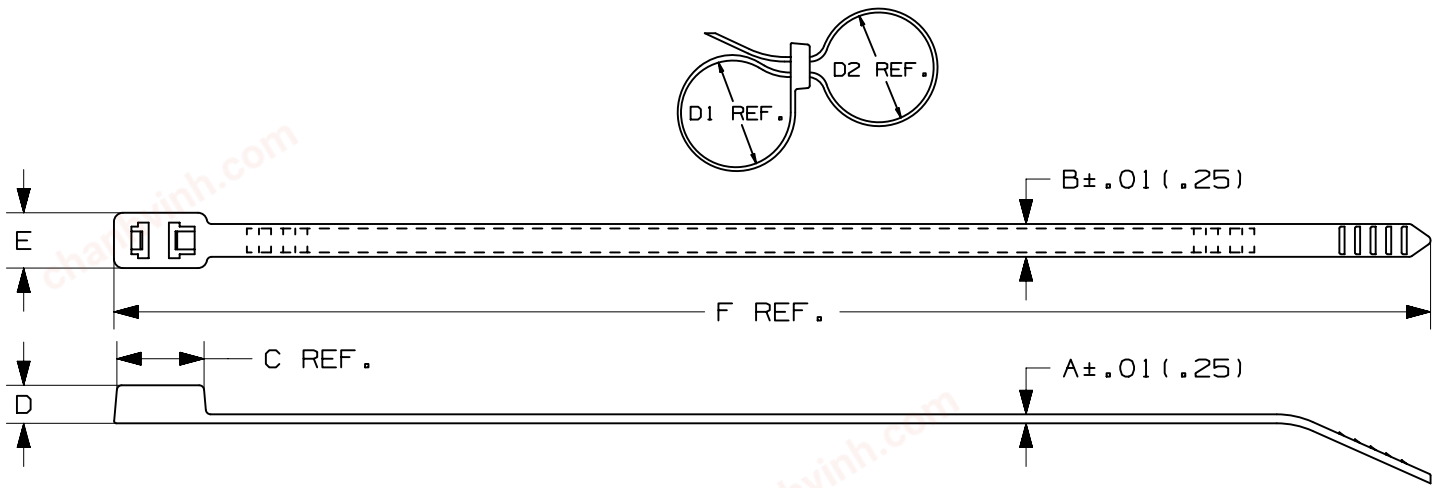

PANDUIT * PART NO.	MAX. COMBINED BUNDLE DIA. D1 + D2 in (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS-SECTION	WEIGHT lbs/100pcs (g)
PLB2S	1.8 (45.7)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.320 (8.1)	7.6 (193)	50 (222)	STANDARD	.34 (154)
PLB3S	3.0 (76.2)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.337 (8.6)	11.8 (300)	50 (222)	STANDARD	.47 (214)
PLB4S	4.1 (104.1)	.052 (1.3)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.337 (8.6)	14.8 (376)	50 (222)	STANDARD	.58 (262)

* SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
6	11.20.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-21645

TITLE

BOW-TY CABLE TIES
PLB SERIES
CUSTOMER DRAWING

ITEM REVISION NAME: 10B0150W/00

DATASET FILE NAME: 10B0150W_DC_PLB/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ± .020 [.51]
.XX ± .02 [.5] ANGLES ±

THIRD ANGLE PROJECTION

MATERIAL: NONE

DRAWING NUMBER: SS-21645

DRAWN BY	DATE	CHK	SCALE	SIZE
KEM	4/6/87	HVP	NONE	A

SHT 1 OF 1

D10100DA/16