
chanhvinh.com

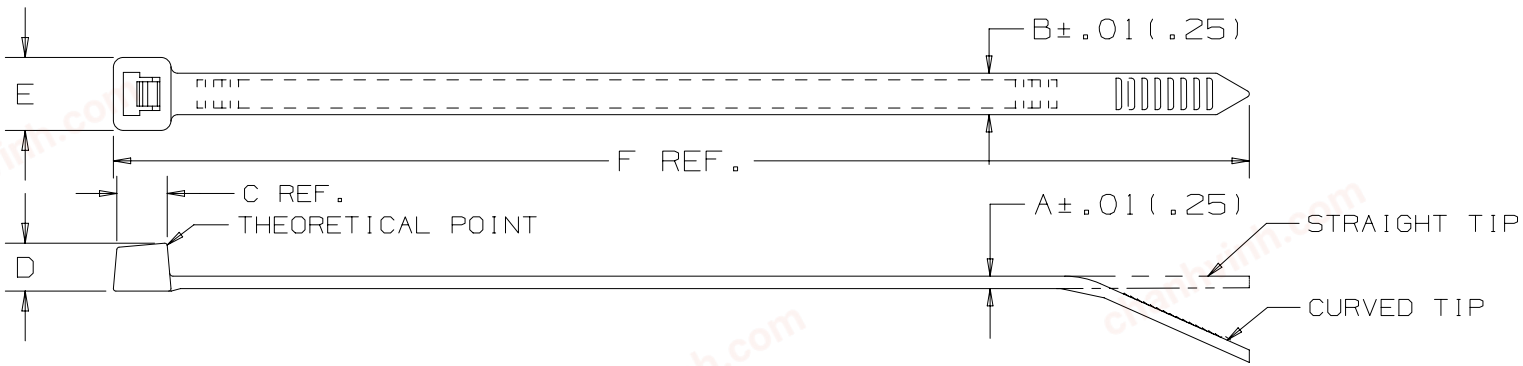

PANDUIT * PART NO.	BUNDLE DIA. MIN. in (mm)	BUNDLE DIA. MAX. in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
PLT3I	.06 (1.5)	3.00 (76)	.052 (1.3)	.145 (3.7)	.220 (5.6)	.180 (4.6)	.260 (6.6)	11.4 (290)	40 (178)	INTERMEDIATE	CURVED	.32 (145)
PLT4I	.06 (1.5)	4.00 (102)	.052 (1.3)	.145 (3.7)	.220 (5.6)	.180 (4.6)	.260 (6.6)	14.5 (368)	40 (178)	INTERMEDIATE	CURVED	.40 (181)
PLT1S	.06 (1.5)	1.00 (25)	.052 (1.3)	.190 (4.8)	.262 (6.7)	.220 (5.6)	.316 (8.0)	4.8 (122)	50 (222)	STANDARD	CURVED	.13 (58)
PLT1.5S	.06 (1.5)	1.50 (38)	.052 (1.3)	.190 (4.8)	.262 (6.7)	.220 (5.6)	.316 (8.0)	6.2 (157)	50 (222)	STANDARD	CURVED	.26 (118)
PLT2S	.06 (1.5)	1.88 (47.8)	.052 (1.3)	.190 (4.8)	.262 (6.7)	.220 (5.6)	.316 (8.0)	7.4 (188)	50 (222)	STANDARD	CURVED	.29 (132)
PLT2.5S	.06 (1.5)	2.50 (63.5)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	9.8 (249)	50 (222)	STANDARD	CURVED	.38 (173)
PLT3S	.06 (1.5)	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	11.5 (292)	50 (222)	STANDARD	CURVED	.45 (204)

NOTES:
*SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
33A	10.02.24	BWG	JADE	DJSL	UPDATED TITLE BLOCK WITH ALTERNATE DESCRIPTION	005806/00
32	10/01/15	BWG	MPH	JADE	REVISED NOTES.	SS-5540/32
31	8/13/13	BWG	KJM	RTFI	CORRECTED REV NO. REMOVED NOTE 1. SEE ECN FOR DETAILS.	SS-5540/30

TITLE: PREMIUM CABLE TIES - PLT SERIES

CUSTOMER DRAWING

ITEM REVISION NAME: W10001CB/33

DATASET FILE NAME: W10001CB_DC/32 SS-5540 SH2_r33A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± - - - .XXX ± .020 [.51]
.XX ± .02 [.5] ANGLES ± - - -
THIRD ANGLE PROJECTION

MATERIAL: NYLON 6.6

DRAWING NUMBER: SS-5540 SHEET 2

DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 4	SIZE
CEW	12-27-84	HVP	NONE		A

D10100DA/16