


chanhvinh.com


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

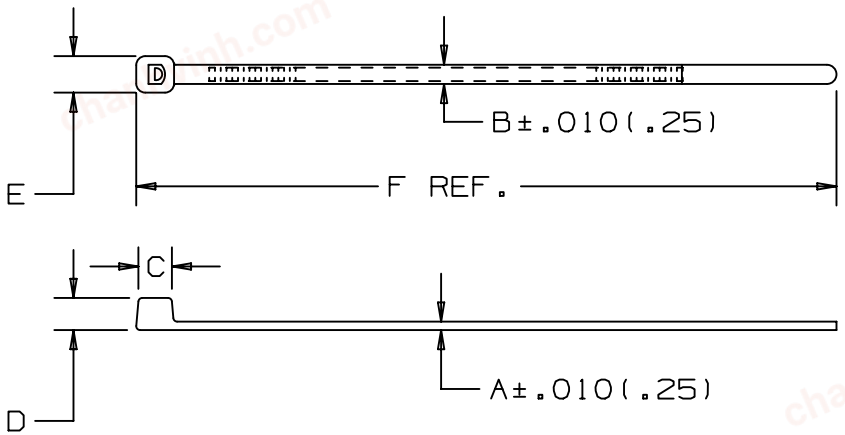

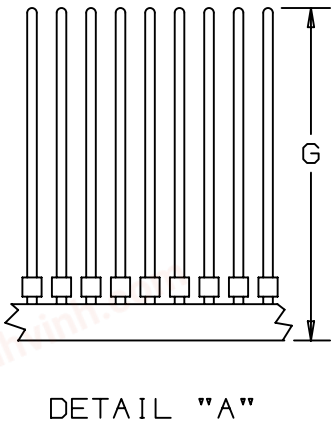

DETAIL "A"

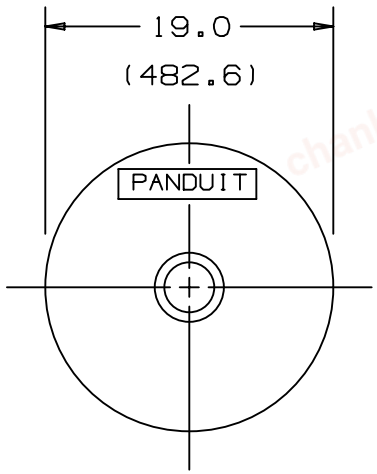

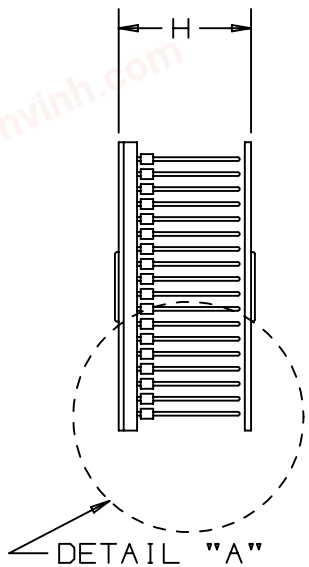

DETAIL "A"

PANDUIT PART NO.*	BUNDLE DIA. MIN IN. (mm)	BUNDLE DIA. MAX IN. (mm)	A IN. (mm)	B IN. (mm)	C IN. (mm)	D IN. (mm)	E IN. (mm)	F IN. (mm)	G IN. (mm)	H IN. (mm)	MINIMUM LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs. (g) /100 pcs
PLT2S-VMR	.06 (1.5)	1.94 (49.3)	.047 (1.2)	.190 (4.8)	.258 (6.6)	.220 (5.6)	.316 (8.0)	8.1 (206)	8.5 (216)	9.3 (236)	50 (222)	STANDARD	.32 (147)
PLT3S-VMR		2.75 (69.9)						11.3 (287)	11.8 (298)	12.5 (318)			.38 (174)

NOTES:
*1) SEE www.panduit.com FOR PART MATERIAL & COLOR SUFFIX DESIGNATIONS.
2) STANDARD PACKAGING: 2500 STRAPS PER REEL; 2 REELS PER CARTON (2S), 1 REEL PER CARTON (3S)
3) PACKAGED FOR USE WITH PAT2S AND PAT3S TOOLS AND DISPENSERS.
4) LISTED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03	11-01-24	BDK	JADE	DJSL	A. UPDATED TITLE BLOCK WITH ALTERNATE DESCRIPTION	006205 r00

A

TITLE
VMR PREMIUM CABLE TIES
PACKAGED FOR AUTOMATIC TOOLS
CUSTOMER DRAWING

ITEM REVISION NAME: W10030BY/03
DATASET FILE NAME: W10030BY/03

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .10 [2.5] .xxx ± .020 [.51]
.xx ± .02 [.5] ANGLES ± ----
THIRD ANGLE PROJECTION

MATERIAL: NYLON 6.6

DRAWING NUMBER: SS-26588

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
RAM	4/8/92	HVP	NONE		A

NXGLOBAL_ASIZE