
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

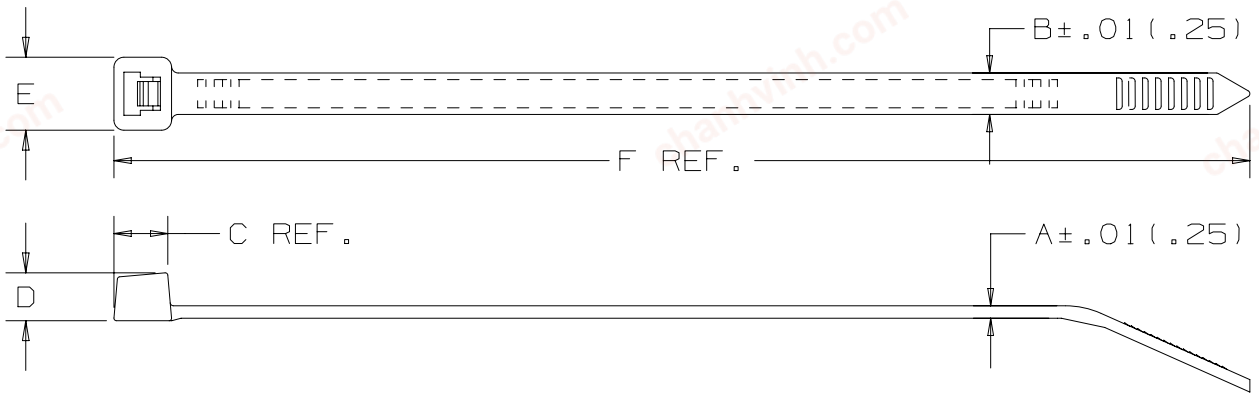

PANDUIT * PART NO.	BUNDLE DIA. MIN. in (mm)	BUNDLE DIA. MAX. in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs./100 pcs. (g)
PLT1M-702Y	.24 (6.1)	.87 (22)	.043 (1.1)	.098 (2.5)	.159 (4.0)	.186 (4.7)	.188 (4.8)	4.0 (102)	18 (80)	MINIATURE	.10 (45)
PLT2S-702Y	.24 (6.1)	1.88 (48)	.055 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	7.40 (188)	50 (222)	STANDARD	.49 (222)
PLT3S-702Y	.39 (10)	3.00 (76)	.055 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	11.60 (295)	50 (222)	STANDARD	.76 (344)

NOTES:

*1) SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR.
2) UL LISTED MAX TEMPERATURE RATING OF 257°F (125°C).
3) MATERIAL FLAMMABILITY RATING: UL94V-0.
4) EXCELLENT RESISTANCE TO MOST CHEMICALS.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
12A	9.13.24	BWG	JADE	DJSL	UPDATED TITLE BLOCK WITH ALTERNATE DESCRIPTION	005806/00
11	4/25/13	BWG	MPH	RTFI	REVISED NOTES 1 AND 2, UPDATED DRAWING BORDER AND TITLE BLOCK.	SS-18060/11

TITLE
PREMIUM CABLE TIE
PLT PLENUM WIRING SERIES

ITEM REVISION NAME: W10001C0/12

DATASET FILE NAME: W10001C0_DC/11-SS-18060_REV11

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± ---- .XXX ± .020 [.51]
.XX ± .02 [.5] ANGLES ± ----
THIRD ANGLE PROJECTION

PANDUIT

MATERIAL: HALAR FLUOROPOLYMER
COLOR: MAROON
REGISTERED TRADEMARK OF Solvay Solexis, Inc.

DRAWING NUMBER: SS-18060

DRAWN BY	DATE	CHK	SCALE	SIZE
C.HARVELL	08/07/91	HVP	NONE	A

SHT 1 OF 1

D10100DA/15