
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

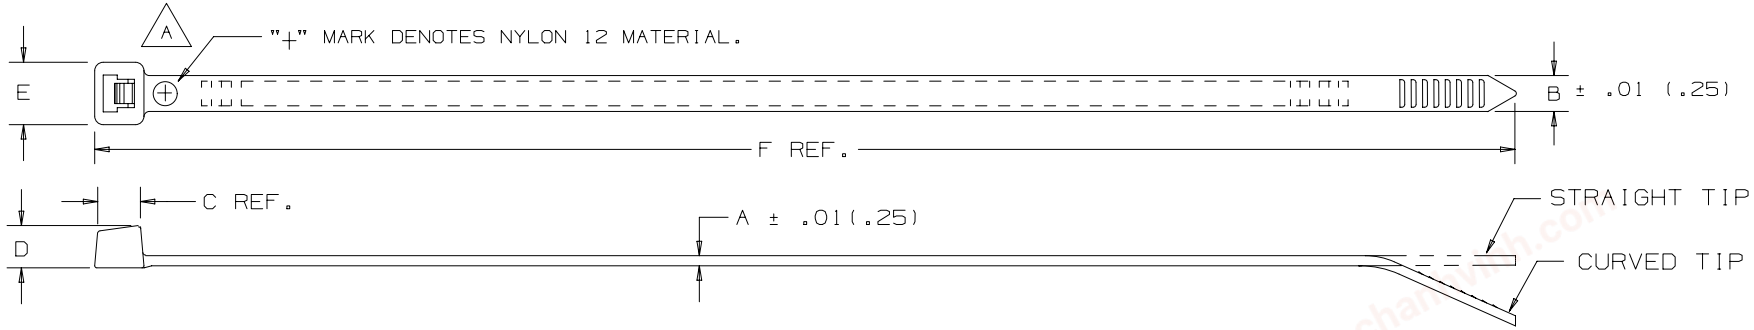


| PANDUIT * PART NO. | BUNDLE DIA. MIN. in (mm) | BUNDLE DIA. MAX. in (mm) | A in (mm) | B in (mm) | C in (mm) | D in (mm) | E in (mm) | F in (mm) | MIN. LOOP TENSILE lbs. (N) | CROSS SECTION ** | TIP STYLE | WEIGHT lbs./100 pcs. (g) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| PLT1M-120 | .06 (1.5) | .87 (22) | .043 (1.1) | .098 (2.5) | .169 (4.3) | .154 (3.9) | .180 (4.6) | 3.9 (99) | 18 (80) | M | CURVED | 0.06 (27) |
| PLT1.5I-120 | .06 (1.5) | 1.38 (35) | .045 (1.1) | .142 (3.6) | .206 (5.2) | .180 (4.6) | .240 (6.1) | 5.6 (142) | 25 (111) | I | CURVED | .12 (55) |
| PLT2S-120 | .06 (1.5) | 1.88 (48) | .052 (1.3) | .190 (4.8) | .262 (6.7) | .220 (5.6) | .316 (8.0) | 7.4 (188) | 40 (178) | S | CURVED | .26 (118) |
| PLT2.5S-120 | .06 (1.5) | 2.50 (63.5) | .052 (1.3) | .190 (4.8) | .265 (6.7) | .220 (5.6) | .337 (8.6) | 9.8 (249) | 40 (178) | S | CURVED | 0.34 (152)) |
| PLT3S-120 | .06 (1.5) | 3.00 (76) | .052 (1.3) | .190 (4.8) | .265 (6.7) | .220 (5.6) | .337 (8.6) | 11.5 (292) | 40 (178) | S | CURVED | 0.36 (165) |
| PLT4S-120 | .06 (1.5) | 4.00 (102) | .052 (1.3) | .190 (4.8) | .265 (6.7) | .220 (5.6) | .337 (8.6) | 14.5 (368) | 40 (178) | S | CURVED | .47 (213) |
| PLT4H-120 | .188 (4.8) | 4.00 (102) | .075 (1.9) | .300 (7.6) | .338 (8.6) | .290 (7.4) | .480 (12.2) | 14.5 (368) | 90 (400) | H | STRAIGHT | 1.21 (549) |
| PLT7LH-120 | .188 (4.8) | 7.00 (178) | .075 (1.9) | .300 (7.6) | .350 (8.8) | .330 (8.4) | .480 (12.2) | 24.7 (627) | 90 (400) | LH | STRAIGHT | 1.98 (899) |
| PLT8LH-120 | .188 (4.8) | 8.00 (203) | .075 (1.9) | .300 (7.6) | .350 (8.8) | .330 (8.4) | .480 (12.2) | 27.6 (701) | 90 (400) | LH | STRAIGHT | 2.01 (913) |

NOTES:

*1) SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, AND PART COLOR.

**2) CABLE TIE CROSS SECTION CODE: M=MINIATURE, I=INTERMEDIATE, S=STANDARD, LH=LIGHT HEAVY & H=HEAVY

3) MATERIAL IS WEATHER RESISTANT AND HAS A LOW WATER ABSORPTION PERCENTAGE.

4) MATERIAL IS RESISTANT TO MOST SALTS & CHEMICALS.

5) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 194°F(90°C).

6) MATERIAL HAS LOW TEMPERATURE TOUGHNESS DOWN TO -40°F(-40°C) WITH A NOTCHED IZOD RATING OF 1.3 ft lbs/in @ ROOM TEMPERATURE.

DIMENSIONS IN PARENTHESIS ARE IN METRIC

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|---|---|---|---|---|---|---|
| 11A | 9.20.24 | BWG | JADE | DJSL | UPDATED TITLE BLOCK WITH ALTERNATE DESCRIPTION (B) | 005806/00 |
| 10 | 1/19/18 | BWG | MPH | JADE | ADDED THE "+" SIGN TO DENOTE NYLON 12 MATERIAL. (A) | 021520/00 |
| -- | --- | -- | -- | -- | UPDATED TITLE BORDER. | --- |
| 9 | 1/09/14 | BWG | RMHI | JADE | ADDED PLT1M, 2.5S AND 3S. | SS-19103/09 |

TITLE

(B) PREMIUM CABLE TIES PLT SERIES

CUSTOMER DRAWING

ITEM REVISION NAME: W10035ER/05

DATASET FILE NAME: W10035ER_DC-SS-19103 r11A CUSTOMER

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± --- .XXX ± .020 (.51)

.XX ± .02 (.5) ANGLES ± ---

THIRD ANGLE PROJECTION

PANDUIT

MATERIAL: NYLON 12 (BLACK)

DRAWING NUMBER: SS-19103

| DRAWN BY | DATE | CHK | SCALE | SIZE |
|---|---|---|---|---|
| CEW | 12/20/84 | HVP | NONE | A |

SHT 1 OF 1

D10100DA/16