
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER		STUD SIZE	WIRE RANGE mm^2	DIMENSIONS mm				
PREFIX	PK			A ±.50	W ±.25	C ±.38	B ±.25	M ±.50
PMNF1-3F	-C -M	M3	0,5-1,5 (22-18)	21,08 (.83)	5,84 (.23)	5,08 (.20)	,81 (.03)	17,53 (.69)
PMNF1-4F	-C -M	M4	0,5-1,5 (22-18)	22,61 (.89)	8,13 (.32)	5,84 (.23)	,81 (.03)	18,29 (.72)
PMNF1-5F	-C -M	M5	0,5-1,5 (22-18)	22,86 (.90)	8,89 (.35)	6,35 (.25)	,81 (.03)	18,80 (.74)
PMNF1-6F	-C -M	M6	0,5-1,5 (22-18)	27,43 (1.08)	11,18 (.44)	8,38 (.33)	,81 (.03)	21,08 (.83)

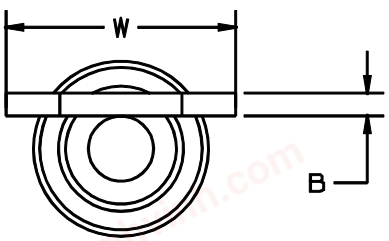

NOTES:

1. USED FOR:
   A. 600V MAX. VOLTAGE RATING
   B. 105°C (221°F) MAX. TEMP. RATING
   C. STRANDED COPPER WIRE


2. PACKAGE QTY:
   A. STD: C=100
   B. BULK: M=1000

3. MATERIAL:
   A. STAMPING: COPPER, TIN PLATED
   B. HOUSING: NYLON, RED

4. WIRE STRIP LENGTH: $5,6^{+,8}_{-0}$ ($7/32^{+1/32}_{-0}$)

5. INSTALLATION TOOLS: REF DWGS.
   A41522, A41523, A41524, A41525

6. DIMENSIONS IN BRACKETS ARE IN INCHES OR AWG

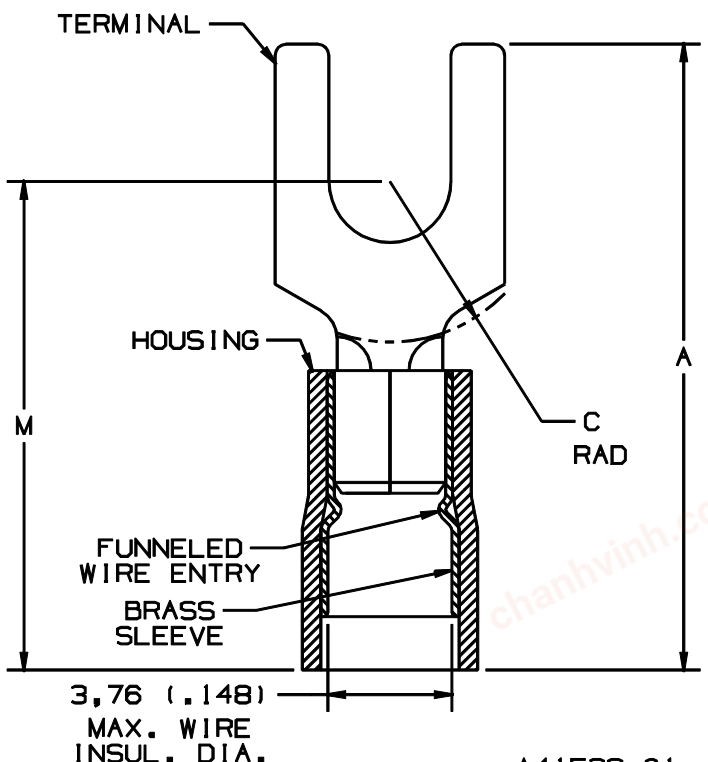

A41538_01

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM
01	10/97	TM		CHANGED DECIMAL POINTS TO COMMAS			
00	2/92	DL	SJ	RELEASED	00816	LA	KS

PANDUIT CORP. TINLEY PARK, ILLINOIS

0,5-1,5 mm^2 METRIC NYLON INSULATED, FUNNELED ENTRY FORK TERMINAL

DRAWN BY	CHK'D	SCALE	DRAWING NO.
DRL		NONE	A41538