chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS - in. A ± .020	W ± .010	C ± .015	M ± .020	H ± .010	TOOLS
PN14-6LF	#6	.86 (21.84)	.25 (6.35)	.22 (5.59)	.62 (15.75)	.14 (3.56)	*CT-100A **CT-400 **CT-460 **CT-600-A (CT-500CH) **CT-600-A (CT-550CH) **CT-1550 **CT-1551 **CT-2500 (CT-2550CH)
PN14-6LFW	#6	.84 (21.34)	.29 (7.37)	.22 (5.59)	.62 (15.75)	.14 (3.56)	
PN14-8LF	#8	.92 (23.37)	.29 (7.37)	.25 (6.35)	.67 (17.02)	.16 (4.06)	
PN14-10LF	#10	.91 (23.11)	.33 (8.38)	.25 (6.35)	.67 (17.02)	.19 (4.83)	
PN14-10LFN	#10	.91 (23.11)	.28 (7.11)	.25 (6.35)	.67 (17.02)	.19 (4.83)	

*FOR USE ON #16-14 AWG SOLID OR STRANDED COPPER WIRE
**FOR USE ON #18-14 AWG SOLID OR STRANDED COPPER WIRE

NOTES:

1. cULus LISTED FOR:
   A. 600V MAX. BLDG WIRE
      (1000 V MAX. IN SIGNS, FIXTURES & LUMINARIES)
   B. 221° F (105° C) MAX TEMP. RATING


2. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES

3. MATERIAL:
   A. STAMPING - .032" THK, COPPER
      TIN PLATED
   B. HOUSING - NYLON, BLUE
   C. SLEEVE - BRASS, TIN PLATED

4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

5. WIRE STRIP LENGTH: 7/32 + 1/32 (5.6 + .8)
   - 0 - 0

c UL us
LISTED
587H
E52164

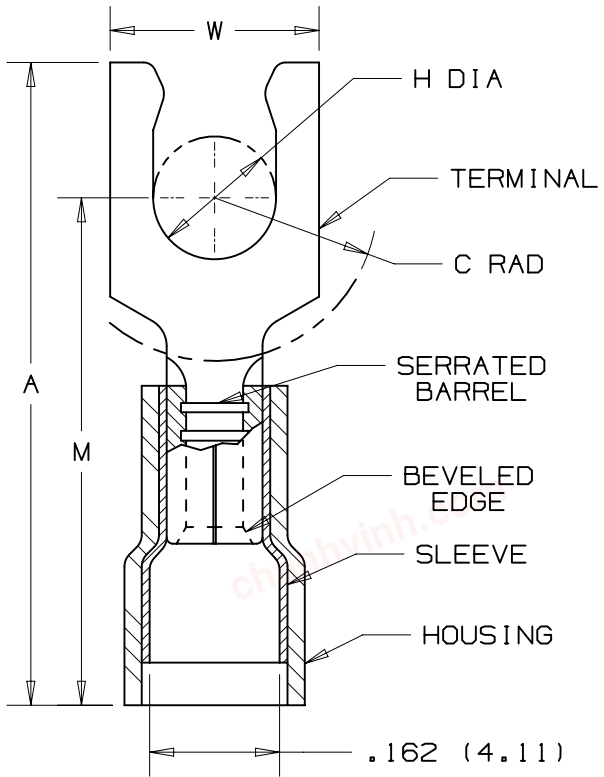

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09	06/14	MBY	JHNU	RGB	REVISED NOTES, MOVED TOOLS TO TABLE, REVISED CERTIFICATION, UPDATED BORDER	N41291BA-A41291

TITLE
#16-14 BARREL NYLON INSULATED LOCKING FORK, .162 [4.11] MAX. WIRE INSULLATION DIAMETER

CUSTOMER DRAWING

ITEM REVISION NAME: N41291BA/09
DATASET FILE NAME: N41291BA/09

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ±
.XX ± ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41291

DRAWN BY	DATE	CHK	SCALE	SIZE
DW		RLS	NONE	A

SHT 1 OF 1

D10100DA/16