
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS - in. A ± .03	W ± .01	C ± .02	M ± .03	H ± .01	TOOLS
PN14-6FN	#6	.79 (20.07)	.24 (6.10)	.19 (4.83)	.65 (16.51)	.15 (3.81)	*CT-100A **CT-400 **CT-460 **CT-600-A (CT-500CH) **CT-600-A (CT-550CH) **CT-1550 **CT-1551 **CT-2500 (CT-2550CH)
PN14-6F	#6	.79 (20.07)	.28 (7.11)	.19 (4.83)	.65 (16.51)	.15 (3.81)	
PN14-8F	#8	.85 (21.59)	.31 (7.87)	.23 (5.84)	.67 (17.02)	.17 (4.32)	
PN14-10F	#10	.87 (22.10)	.34 (8.64)	.24 (6.10)	.71 (18.03)	.20 (5.08)	
PN14-10FN	#10	.87 (22.10)	.31 (7.87)	.24 (6.10)	.71 (18.03)	.20 (5.08)	
PN14-14F	1/4"	1.02 (25.91)	.44 (11.18)	.32 (8.13)	.77 (19.56)	.27 (6.86)	

*FOR USE ON #16-14 AWG SOLID OR STRANDED COPPER WIRE
**FOR USE ON #18-14 AWG SOLID OR STRANDED COPPER WIRE

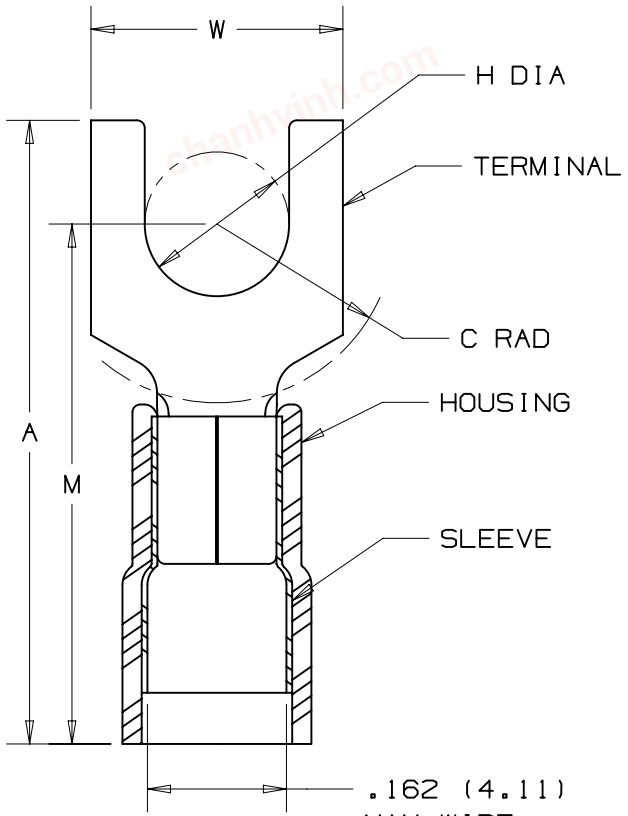

NOTES:

1. cULus LISTED FOR:
   A. 221° F (105° C) MAX TEMP RATING
   B. 600 V MAX. BLDG WIRE
      (1000 V MAX. IN SIGNS, FIXTURES & LUMINARIES)

2. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES

3. MATERIAL:
   A. STAMPING - .032" (.81) THK, COPPER
      TIN PLATED
   B. HOUSING - NYLON, BLUE
   C. SLEEVE - BRASS, TIN PLATED

4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

5. WIRE STRIP LENGTH: 7/32 + 1/32 (5.6 + .8)
   - 0 - 0

c UL us
LISTED
587H
E52164

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04	06/14	MBY	JHNU	RGB	REVISED NOTES, MOVED TOOLS TO TABLE, REVISED CERTIFICATION, UPDATED BORDER	N41192BA-A41192

TITLE
3PC. NYLON INSULATED, 16-14 BARREL, FORKS
CUSTOMER DRAWING

ITEM REVISION NAME: N41192BA/04
DATASET FILE NAME: N41192BA/04

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ±
.XX ± ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41192

DRAWN BY	DATE	CHK	SCALE	SIZE
FES		LA	NONE	A

SHT 1 OF 1

D10100DA/16