
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.01	C ±.02	M ±.03	H ±.01
PN18-6LF	#6	.82 (20,8)	.27 (6,9)	.22 (5,6)	.63 (16)	.14 (3,6)
PN18-6LFW	#6	.85 (21,5)	.29 (7,4)	.22 (5,6)	.64 (16,2)	.14 (3,6)
PN18-8LF	#8	.89 (22,7)	.29 (7,4)	.25 (6,4)	.68 (17,3)	.16 (4,1)
PN18-10LF	#10	.89 (22,5)	.33 (8,4)	.25 (6,4)	.68 (17,3)	.19 (4,8)
PN18-10LFN *	#10	.91 (23,2)	.29 (7,4)	.25 (6,4)	.73 (17,4)	.19 (4,8)

1. UL LISTED AND CSA CERTIFIED FOR:
   - A. 600V. MAX. VOLTAGE RATING (1000V. IN SIGN FIXTURES AND LUMINAIRES)
   - B. #22-18 AWG SOLID OR STRANDED COPPER WIRE
   - C. TEMPERATURE RATING OF INSULATION: 105°C (221°F)
2. MATERIAL:
   - A. STAMPING - .032 (,81) THK COPPER, TIN PLATED
   - B. HOUSING - RED NYLON
   - C. SLEEVE - BRASS, TIN PLATED
3. SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS:
   - A. UL LISTED AND CSA CERTIFIED: CT-100, CT-100A, CT-400(UL ONLY), CT-600-A, CT-1550, CT-1551, CT-2500
   - B. PANDUIT APPROVED: CT-160,CT-260
6. WIRE STRIP LENGTH : 7/32" $^{+\ 1/32"}_{-\ 0}$ (5,6 $^{+,8}_{-0}$)

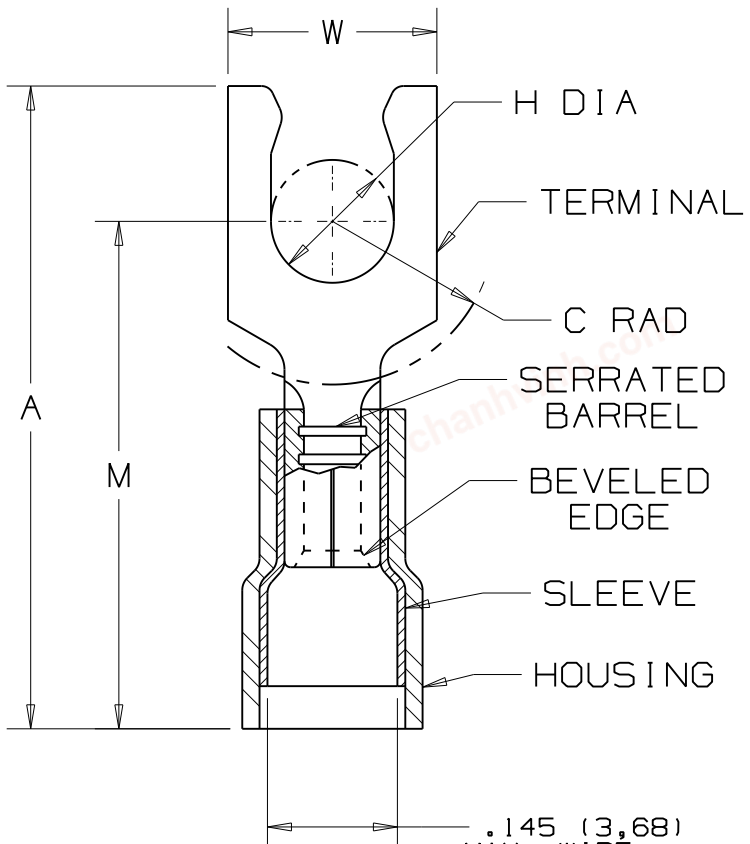

LISTED 587H E52164 CERTIFIED LR31212

* PN18-10LFN IS NOT UL LISTED OR CSA CERTIFIED.

REV	DATE	BY	DESCRIPTION	CUST	PM
08	8/11	SHOR	MODIFIED NOTE #3, ADDED INSTALLATION TOOLS		

PANDUIT CORP. TINLEY PARK, ILLINOIS

#22-18 BARREL NYLON INSULATED LOCKING FORK, .145 (3,68) MAX. WIRE INSULATION DIAMETER

DRAWN BY	CHK'D	SCALE	DRAWING NO.
DAW	CJH	NONE	A41290