
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	MILITARY PART NO. AND CLASS	STUD SIZE		DIMENSIONS in [mm]				
		ENGLISH	METRIC	L ±.08 [2,0]	W ±.01 [0,3]	C ±.02 [0,5]	M ±.06 [1,5]	H ±.01 [0,3]
PN18-4R	---	#4	---	.80 [20,3]	.25 [6,4]	.22 [5,6]	.67 [17,0]	.12 [3,1]
PN18-4RN	MS25036-148 CLASS 1	---	M3	.74 [18,8]	.22 [5,6]	.18 [4,6]	.63 [16,0]	.12 [3,1]
PN18-6R	MS25036-102 CLASS 1	#6	M3,5	.79 [20,1]	.25 [6,4]	.22 [5,6]	.67 [17,0]	.15 [3,8]
PN18-6RN	MS25036-101 CLASS 1	#6	M3,5	.77 [19,6]	.22 [5,6]	.18 [4,6]	.63 [16,0]	.15 [3,8]
PN18-8R	MS25036-149 CLASS 1	#8	M4	.85 [21,6]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.17 [4,3]
PN18-10R	MS25036-103 CLASS 1	#10	--	.87 [22,1]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]
PN18-14R	MS25036-150 CLASS 1	1/4"	M6	1.05 [26,7]	.45 [11,4]	.38 [9,7]	.80 [20,3]	.27 [6,9]
PN18-56R	MS25036-104 CLASS 1	5/16"	M8	1.04 [26.4]	.46 [11.7]	.38 [9.7]	.84 [21.8]	.33 [8.4]
PN18-38R	MS25036-105 CLASS 1	3/8"	--	1.14 [29,0]	.53 [13,5]	.43 [10,9]	.91 [23,1]	.39 [9,9]

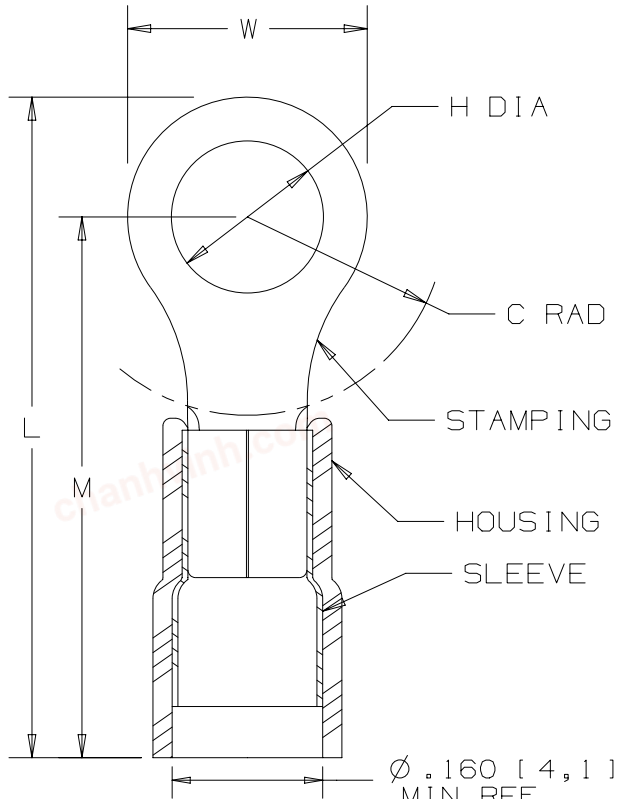

NOTES:

1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
2. DIMENSIONS IN [ ] ARE METRIC.
3. WEIGHT: .002 TO .004 Lbs. APROX
4. PART INCLUDES:
   A. STAMPING: .03" [0,8mm] THK COPPER, TIN PLATED
   B. HOUSING: NYLON, RED
   C. SLEEVE: BRASS, TIN PLATED
5. UL LISTED AND CSA CERTIFIED FOR:
   A. #22-18 AWG [0,5-1,5 mm²] SOLID OR STRANDED COPPER WIRE.
   B. 221°F [105°C] MAX. OPERATING TEMPERATURE.
   C. 600 V. MAX. VOLTAGE RATING
      1000 V. IN SIGNS, FIXTURES & LUMINARIES
6. WIRE STRIP LENGTH:
   7/32" $^{+1/32}_{-0}$ [5,6mm $^{+0,8}_{-0}$]

UL APPROVED TOOLS:
CT-100
CT-1550
CT-1551
CT-2500 (CT-2550CH)

LISTED 587H E52164

CERTIFIED LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
15A	06-15-26	ANVM	ANVM	JSUN	- REMOVED MILITARY CLASS 2. - REMOVED OBSOLETE PART NUMBERS: PN18-12R - UPDATED TITTLE BLOCK AND NOTES TO LATEST STANDARDS. - UPDATED L TOLERANCE FROM ".03" TO ".08" - UPDATED M TOLERANCE FROM ".03" TO ".06" - ADDED WIRE ENTRY Ø REF DIM. - UPDATED UL APPROVED TOOLS.	026842/00
14A	05/01/14	JHNU	JHNU	TMR	REVISED L DIMENSION: PN18-14R: 1.05 WAS 1.09, PN18-56R: 1.04 WAS 1.09, PN18-38R: 1.14 WAS 1.17, PN18-12R: 1.32 WAS 1.35	N41543BA - A41543

PART NUMBER: SEE TABLE

TITLE: 3PC. NYLON INSULATED 22-18 BARREL, RING TERMINALS

CUSTOMER DRAWING

ITEM REVISION NAME: N41543BA/15

DATASET FILE NAME: N41543BA-DC r15A

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41543

DRAWN BY	DATE	CHK	SCALE	SIZE
BDK	06-01-15	LA	N/A	A

SHEET 1 OF 1

A-SIZE CUSTOMER