
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENG	MET	L ± .03 [0,51]	W ± .01 [0,25]	C ± .02 [0,38]	M ± .03 [0,51]	H ± .01 [0,25]
PNF14-4R	#4	--	.78 [19,81]	.25 [6,35]	.18 [4,57]	.66 [16,76]	.12 [3,05]
PMNF2-3R	--	M3	.76 [19,35]	.23 [5,88]	.19 [4,78]	.65 [16,63]	.13 [3,30]
PNF14-6RN	#6	M3,5	.78 [19,81]	.25 [6,35]	.18 [4,57]	.63 [16,00]	.15 [3,81]
PNF14-6R	#6	M3,5	.87 [22,10]	.31 [3,87]	.24 [6,10]	.71 [18,03]	.15 [3,81]
PNF14-8R	#8	M4	.87 [22,10]	.31 [7,87]	.25 [6,35]	.71 [18,03]	.17 [4,32]
PNF14-10R	#10	--	.85 [21,59]	.31 [7,87]	.29 [7,37]	.71 [18,03]	.20 [5,08]
PMNF2-5R	--	M5	.88 [22,35]	.35 [8,92]	.29 [7,37]	.71 [18,03]	.21 [5,33]
PNF14-14R	1/4"	M6	1.06 [26,92]	.46 [11,68]	.40 [10,16]	.85 [21,59]	.27 [6,86]
PNF14-56R	5/16"	M8	1.06 [26,92]	.46 [11,68]	.40 [10,16]	.85 [21,59]	.34 [8,64]
PNF14-38R	3/8"	--	1.14 [28,96]	.53 [13,46]	.45 [11,43]	.89 [22,61]	.40 [10,16]

UL & CSA TOOLS (DIES)
CT-100A
CT-250
CT-500CH
CT-550C
CT-600-A (CT-500CH)
CT-600-A (CT-550CH)
CT-1550
CT-1551
CT-2300
CT-2400 (CT-2455CH & CT-2455CHA)
CT-2500 (CT-2550CH)

PANDUIT APPROVED TOOLS
CT-160
CT-260

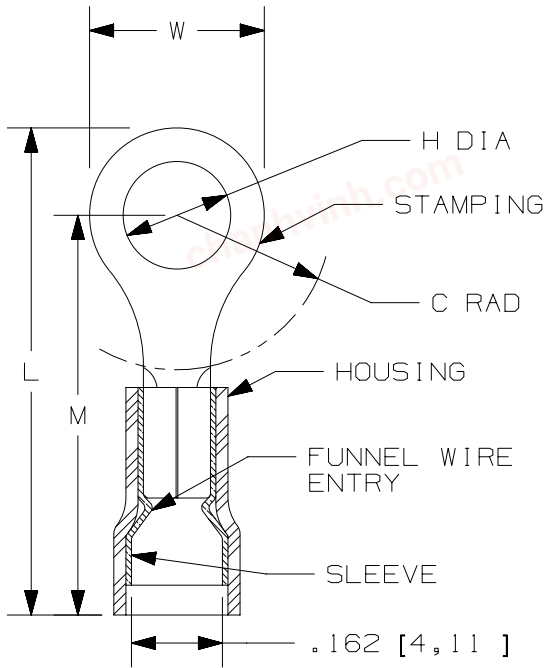

NOTES:

1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
2. DIMENSIONS IN [ ] ARE METRIC.
3. WEIGHT: .002 TO .004 Lbs. APROX
4. PART INCLUDES:
   A. STAMPING: .032" [0,81mm] THK COPPER, TIN PLATED
   B. HOUSING: NYLON, BLUE
   C. SLEEVE: BRASS, TIN PLATED
5. UL LISTED AND CSA CERTIFIED FOR:
   A. #16-14 AWG [1,5-2,5 mm²] SOLID OR STRANDED COPPER WIRE.
   B. 221°F [105°C] MAX. OPERATING TEMPERATURE.
   C. 600 V. MAX. VOLTAGE RATING
      1000 V. IN SIGNS, FIXTURES & LUMINARIES
6. WIRE STRIP LENGTH:
   7/32" $^{+1/32}_{-0}$ [5,6mm $^{+0,8}_{-0}$]

LISTED 587H E52164

CERTIFIED LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
10B	10-22-25	DPOI	DPOI	JSUN	-REMOVED COLUMN 2 WITH MILITARY SPEC CLASS 2 IN CHART & TOOLS. -ADDED NEW TOOLS: CT-250/500CH/550C/2300/2400	022609/00
09	01-01-18	TMR	TMR	RGB	AGENCY CERTIFICATION UPDATED.	N41276BA - A41276

PART NUMBER: SEE TABLE

TITLE: #16-14 BARREL NYLON INSULATED, FUNNELED WIRE ENTRY RING TONGUE, 0.162 [4.11] MAX. WIRE INSULATION DIAMETER.

CUSTOMER DRAWING

ITEM REVISION NAME: N41276BA/10

DATASET FILE NAME: N41276BA_DC r10A

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTE 4

DRAWING NUMBER: A41276

DRAWN BY	DATE	CHK	SCALE	SIZE
DAW	01-01-2018	RLS	NONE	A

SHEET 1 OF 1

A-SIZE CUSTOMER