

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORPORATION.


PANDUIT PART NUMBER	USED WITH CABLE TIES	DIMENSIONS				MATERIAL	WEIGHT grams/100pcs
		'A' (REF)	'B' (REF)	'C'	'D' (REF)		
PUM-071-_30	M, I , S	16.5	6.6	16.9	10.4	HEAT STABILIZED NYLON 6/6 BLACK	44.35

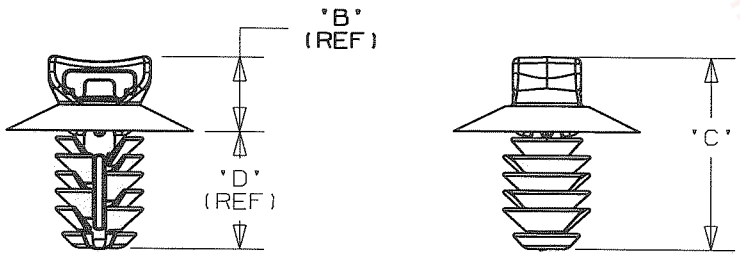



NOTES:

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, AND COLOR.
2. (*) DIMENSIONAL VARIANCE IS POSSIBLE DUE TO MOLDING PROCESS RELATED SINK MARKS.
3. APPLICATION SPECIFICATION:
   HOLE DIAMETER: 6.3 - 7.1 mm
   PANEL THICKNESS: 0.8 - 7.0 mm



SCALE 2:1

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	
10B	9/26/08	PSG	RRR	ADDED, REMOVED, AND RENAMED DIMENSIONS	GB0239MJ 10B	KLN		
10A	8/22/08	PSG		REMOVED RIB FROM HEAD, UPDATED FILE NAME AND CHANGED REV TO TC REV STYLE	GB0239MJ 10A			
R	8-11-06	TMSA		INITIAL RELEASE	GB0239MJ R			

CAD FILENAME/LAYERS: G03151BB_DC_GB0239MJ/10B

PANDUIT CORP. TINLEY PARK, ILLINOIS

PUM-071-_30
PUSH UMBRELLA MOUNT 071

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE METRIC
TOLERANCE: ±0.5MM

DRAWN BY: TMSA
DATE: 8-11-06
CHK'D: KLN
MAT'L: SEE TABLE
SCALE: 1:1 UNLESS NOTED
DRAWING NO.: GB0239MJ
DWG: A
SIZE

chanhvinh.com