

chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE		MAX. WIRE INSUL. DIA.	HOUSING COLOR	DIMENSIONS in. [mm]				TOOLS
	ENGLISH	METRIC			A ± .03 [0,8]	B ± .01 [0,3]	C ± .02 [0,3]	D DIA	
PV18-P47	22-18	0,5-1,0	.15 [3,8]	RED	.97 [24,6]	.07 [1,8]	.49 [12,4]	.15 [3,8]	CT-100# **CT-260 CT-600A (CT-550CH) CT-1550 CT-1551 CT-2500 (CT-2550CH)
PV14-P47	16-14	1,5-2,5	.17 [4,3]	BLUE	.97 [24,6]	.07 [1,8]	.49 [12,4]	.17 [4,3]	
PV10-P55*	12-10	4,0-6,0	.25 [6,4]	YELLOW	1.10 [27,9]	.10 [2,5]	.55 [14,0]	.25 [6,35]	

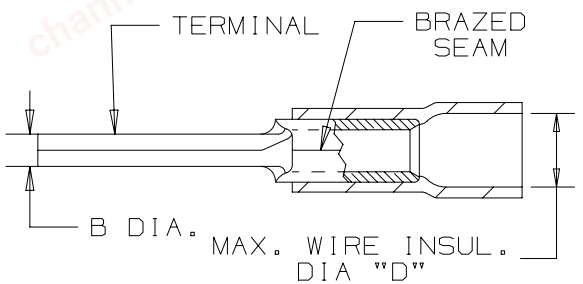

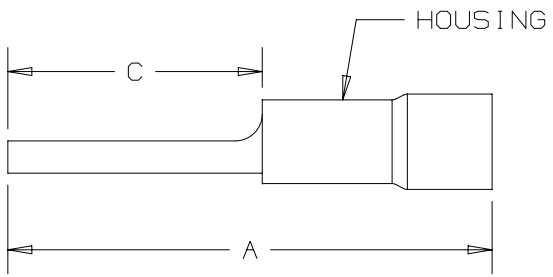

*NOT UL LISTED
**PANDUIT APPROVED TOOL

NOTES:
1. UL LISTED FOR:
   A. SOILD OR STRANDED COPPER WIRE ONLY
   B. 221°F [105°C] MAX. OPERATING TEMPERATURE
   C. 600V. MAX. VOLTAGE RATING

2. SEE www.panduit.com FOR PACKAGE QUANTITIES

3. MATERIAL:
   A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED
   B. HOUSING: VINYL, COLOR CODED

4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

5. WIRE STRIP LENGTH: 5/16" $^{+1/32}_{-0}$ [7,9 $^{+0,8}_{-0}$]

6. TOOLS MAY BE FOLLOWED BY A LETTER TO DESIGNATE REVISION.

LISTED
587H
E52164

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
15	9/19	JHNU	TMR	MRJS	REVISED LISTING: UL WAS cULus ADDED NOTE 6	051570
14	8/14	MBY	JHNU	RGB	REVISED NOTES, MOVED TOOLS TO TABLE, REVISED CERTIFICATION	N41335BA-A41335

TITLE
PIN TERMINAL, VINYL INSULATED, FUNNEL ENTRY
CUSTOMER DRAWING

ITEM REVISION NAME: N41335BA/15
DATASET FILE NAME: N41335BA/15

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ±
.XX ± ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41335

DRAWN BY	DATE	CHK	SCALE	SIZE
DAW	-	RLS	N.T.S.	A

SHT 1 OF 1

D10100DA/16