
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART NUMBER | STUD SIZE | DIMENSIONS - in. A ± .03 | W ± .01 | C ± .02 | M ± .03 | H ± .01 | TOOLS |
|---|---|---|---|---|---|---|---|
| PV4-10R | #10 | 1.88 (47.75) | .55 (13.97) | .50 (12.7) | 1.61 (40.89) | .20 (5.08) | CT-720 (CD-720PV8-2) CT-2600 (CD-2600-PV4) |
| PV4-14R | 1/4" | 1.88 (47.75) | .55 (13.97) | .50 (12.7) | 1.61 (40.89) | .27 (6.86) | |
| PV4-56R | 5/16" | 1.95 (49.53) | .68 (17.27) | .50 (12.7) | 1.61 (40.89) | .33 (8.38) | |
| PV4-38R | 3/8" | 1.95 (49.53) | .68 (17.27) | .50 (12.7) | 1.61 (40.89) | .39 (9.91) | |
| PV4-12R | 1/2" | 2.04 (51.82) | .86 (21.84) | .50 (12.7) | 1.61 (40.89) | .52 (13.21) | |

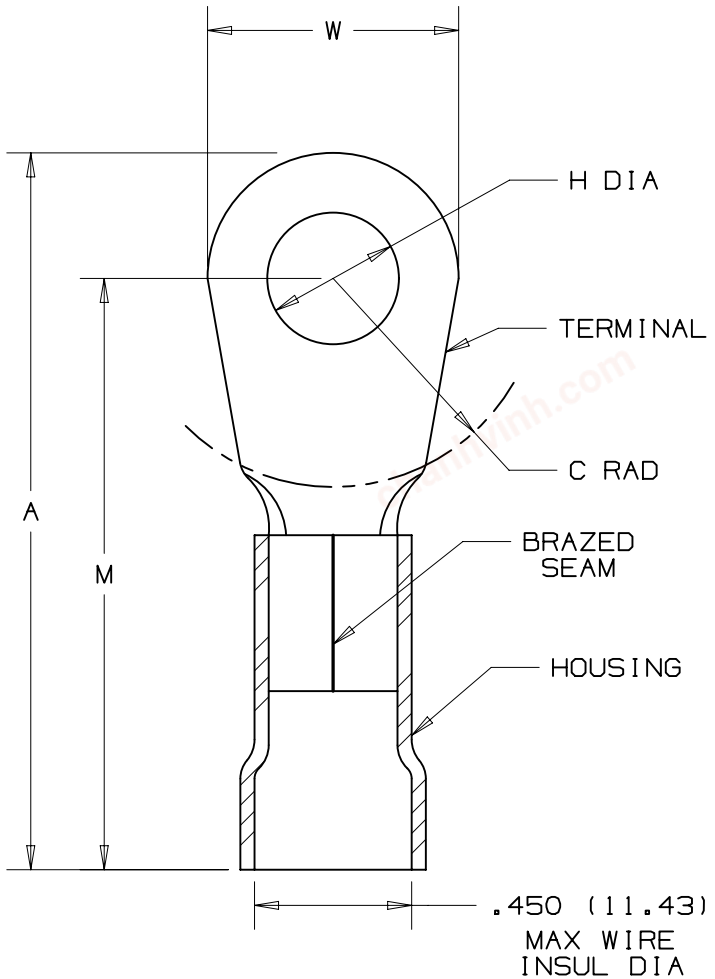


NOTES:

1. cULus LISTED FOR:
   A. 600V MAX VOLTAGE RATING
   B. 221° F (105° C) MAX TEMP RATING
   C. #4 AWG STRANDED COPPER WIRE

2. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES

3. MATERIAL:
   A. STAMPING - .050" (1.27) THK, COPPER TIN PLATED
   B. HOUSING - VINYL, YELLOW

4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

5. WIRE STRIP LENGTH: 1/2 + 1/32 (12.7 + .8) - 0 - 0

c UL us
LISTED
587H
E52164

TITLE
#4 BARREL VINYL INSULATED RING TONGUE .450 (11.43) MAX. WIRE INSUL. DIAMETER
CUSTOMER DRAWING

ITEM REVISION NAME: N41217BB/06
DATASET FILE NAME: N41217BB/06 A41217

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ±
.XX ± ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTE 3

DRAWING NUMBER: A41217

DRAWN BY: DAW | DATE | CHK | SCALE: NONE

SHT 1 OF 1 | SIZE: A

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|---|---|---|---|---|---|---|
| 06 | 06/14 | MBY | JHNU | RGB | REVISED UL LOGO TO cULus LOGO, REVISED NOTES, MOVED TOOLS TO TABLE, UPDATED BORDER | N41217-A41217 |

D10100DA/16