chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS - in. A ±.03	W ± .01	C ± .02	M ± .03	H ±.01	TOOLS
*PV8-8RN	#8	1.48 (37.59)	.36 (9.14)	.43 (10.92)	1.30 (33.02)	.17 (4.32)	CT-720 (CD-720PV8-2) CT-2600 (CD-2600-PV8) CT-1701
PV8-8R	#8	1.51 (38.86)	.42 (10.67)	.43 (10.92)	1.30 (33.02)	.17 (4.32)	
PV8-10R	#10	1.53 (38.86)	.47 (11.94)	.43 (10.92)	1.30 (33.02)	.20 (5.08)	
PV8-14R	1/4"	1.53 (38.86)	.47 (11.94)	.43 (10.92)	1.30 (33.02)	.27 (6.86)	
*PV8-56R	5/16"	*1.64 (41.66)	.59 (14.99)	.51 (12.95)	1.35 (34.29)	.33 (8.38)	
PV8-38R	3/8"	1.64 (41.66)	.59 (14.99)	.51 (12.95)	1.35 (34.29)	.39 (9.91)	

* PV8-56R "A" TOLERANCE IS $^{-.05}_{+.03}$

NOTES:

1. cULus LISTED FOR:
   A. 600V MAX VOLTAGE RATING
   B. 221° F (105° C) MAX TEMP RATING
   C. #8 AWG STRANDED COPPER WIRE
2. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
3. MATERIAL:
   A. STAMPING - .040" (1.02) THK, COPPER TIN PLATED
   B. HOUSING - VINYL, RED
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. WIRE STRIP LENGTH: 3/8 + 1/32 (9.5 + .8) - 0 - 0

c UL us
LISTED
587H
E52164

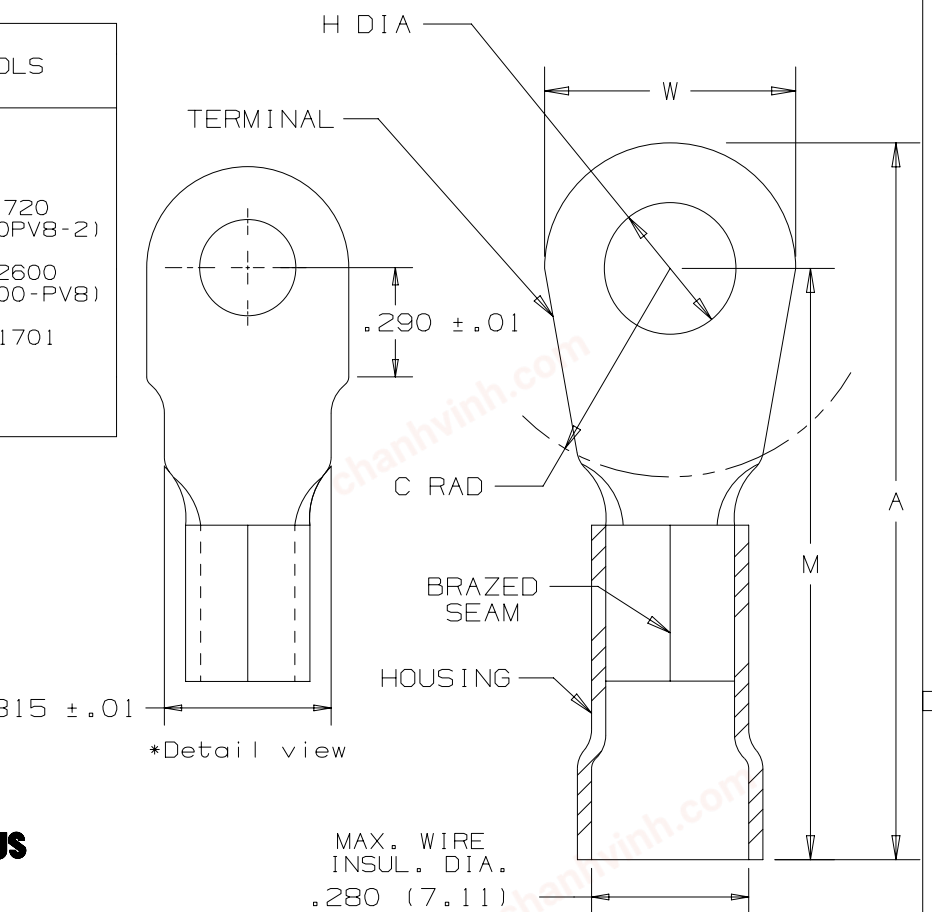

PART NUMBER: SEE TABLE

TITLE: #8 BARREL VINYL INSULATED RING TONGUE

CUSTOMER DRAWING

ITEM REVISION NAME: N41219BB/13

DATASET FILE NAME: N41219BB/13

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ± .010 [.3]
.XX ± .03 [.8] ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTE 3

DRAWING NUMBER: A41219

DRAWN BY	DATE	CHK	SCALE	SIZE
DAW			NONE	A

SHT 1 OF 1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
13	2/26	ANVM	ANVM	JSUN	REMOVED OBSOLETE PV8-12R ADDED CT-1701 TOOL, ADDED TABLE NOTE UPDATED PV8-56R "A" TOLERANCE FROM "±.03" TO $^{-.05}_{+.03}$"	021525/00
12	9/14	JHNU	JHNU	RGB	ADDED ASTERISK TO PV8-8RN TO REFERENCE DETAIL VIEW	N1219BA
11	6/14	MBY	JHNU	RGB	REVISED UL LOGO TO cULus LOGO, REVISED NOTES, MOVED TOOLS TO TABLE, UPDATED BORDER	N41219BB

D10100DA/14