

chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

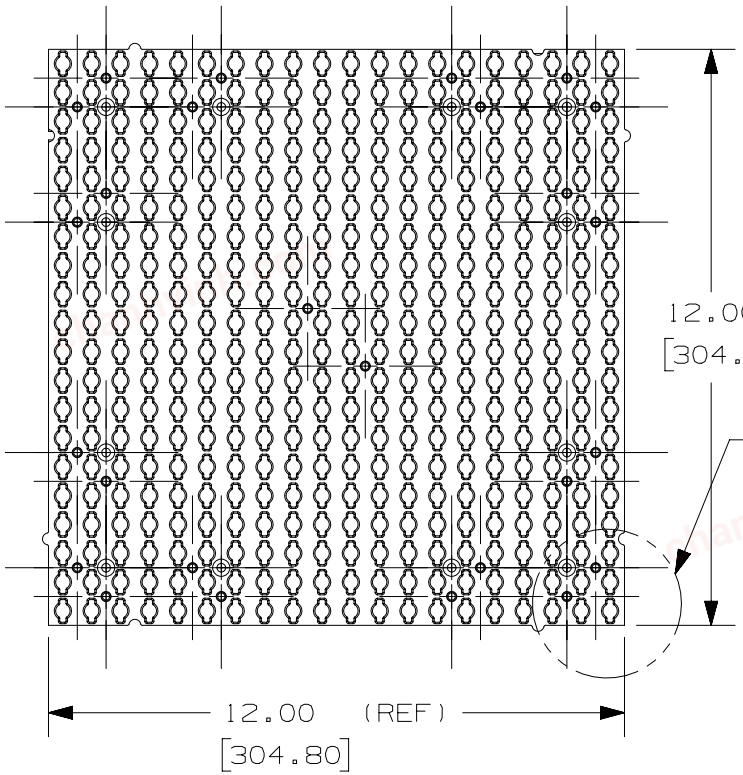


NOTES:


1. DIMENSIONS IN BRACKETS [ ] ARE METRIC [mm].
2. COLOR: BLACK
3. PRODUCT DESIGNED TO SUPPORT A MAXIMUM STATIC LOAD OF 5 LBS WITH COMPATIBLE PARTS.
4. PRODUCT IS RATED FOR ENVIRONMENTAL CONDITIONS OF 40-100°F IN ALL HUMIDITY RANGES.
5. FOR INSTALLATION INTO PLYWOOD, #8 OR #10 COARSE THREAD FLAT HEAD WOOD SCREWS WITH A MIN LENGTH OF 1.75" ARE RECOMMENDED.

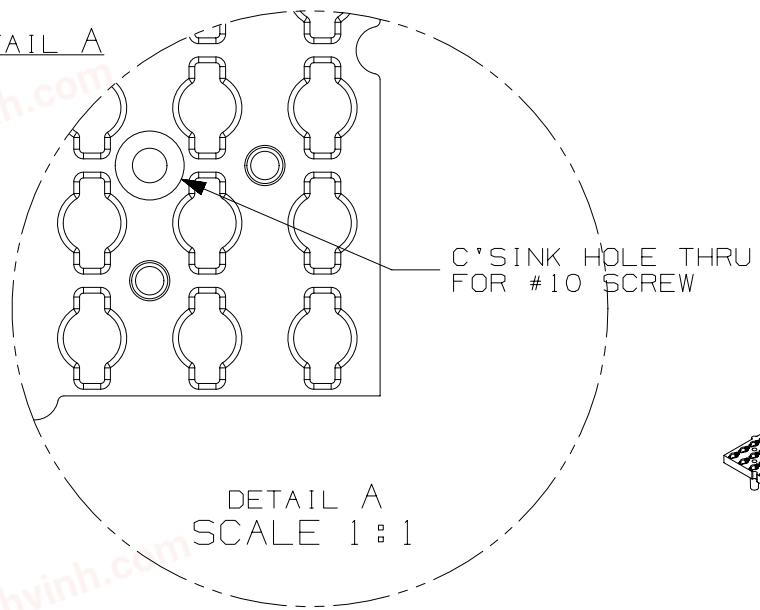

DETAIL A
SCALE 1:1

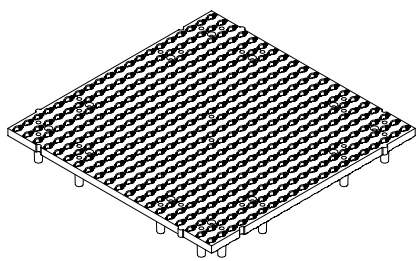

SCALE: 1:8

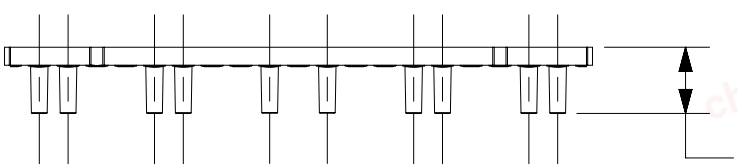

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	6/10/15	ANF	DJW	MSAD	DRAWING RELEASED	GAECN02965

TITLE

QUICK-BUILD GRID TILE; 1' X 1'; 8 PER PACKAGE (QB-TILE)

CUSTOMER DRAWING

ITEM REVISION NAME: 13L179EK/09

DATASET FILE NAME: 13L179EK_DC/09

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .1 [2.54] .XXX ± .005 [.127]

.XX ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: ABS

DRAWING NUMBER: 13L179EK-DC

DRAWN BY	DATE	CHK	SCALE	SIZE
ANF	06-10-2015		1:4	A

SHT 1 OF 1