
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

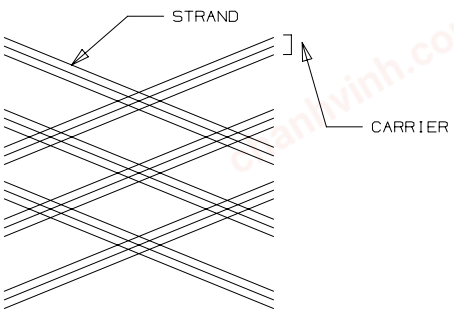

SE 12 PFR - M R 10

- SLEEVING EXPANDABLE
- NOM. I.D. SIZE 12 = 0.125 [3.2]
  25 = 0.250 [6.4]
  38 = 0.375 [9.5]
  50 = 0.500 [12.7]
  75 = 0.750 [19.1]
  125 = 1.250 [31.8]
  150 = 1.500 [38.1]
  175 = 1.750 [44.5]
  200 = 2.000 [50.8]
  250 = 2.500 [63.5]
- MATERIAL P = PET
  PFR = FLAME RETARDANT PET
- PACKAGE SIZE L = 50 FT [15.24 M]
  C = 100 FT [30.48 M]
  T = 200 FT [60.96 M]
  D = 500 FT [152.4 M]
  M = 1000 FT [304.8 M]
- REEL
- COLOR 0 = WEATHER RESISTANT BLACK
  8 = GRAY
  10 = WHITE

PANDUIT PART NO.	NOMINAL I.D. inches [mm]	BUNDLE DIA. inches [mm]	NO. OF CARRIERS	NO. OF STRANDS PER CARRIER	WEIGHT/1000 lbs (kg)
SE12___-_R__	0.125 [3.18]	0.0937-0.250 [2.37-6.35]	32	1	1.81 (82)
SE25___-_R__	0.250 [6.35]	0.125-0.375 [3.17-9.53]	24/48 *	3/1 *	3.92 (1.78)
SE38___-_R__	0.375 [9.53]	0.1875-0.625 [4.76-15.88]	36	3	5.71 (2.59)
SE50___-_R__	0.500 [12.70]	0.250-0.750 [6.35-9.05]	48	3	7.41 (3.37)
SE75___-_R__	0.750 [19.05]	0.500-1.250 [12.70-31.75]	64 OR 72	3	10.42 (4.74)
SE125___-_R__	1.250 [31.75]	0.750-1.500 [19.05-38.10]	96	3	15.87 (7.21)
SE150___-_R__	1.500 [38.10]	1.000-2.250 [25.40-57.15]	96	4	19.61 (8.91)
SE175___-_R__	1.750 [44.45]	1.250-2.750 [31.75-68.85]	120	4	23.3 (10.59)
SE200P-_R_	2.000 [50.80]	1.500-3.500 [38.10-88.90]	120	4	33.3 (15.10)
SE250P-_R_	2.500 [63.50]	1.750-3.635 [44.50-92.33]	120	6	38.0 (17.24)

NOTES:
1. ALL STRANDS OF THE PET SLEEVING SHALL BE TZHE SAME COLOR.
2. THE FLAME RETARDANT PET MATERIAL SHALL HAVE ALL STRANDS THE SAME COLOR EXCEPT FOR TWO CRISSCROSS WHITE TRACERS (EACH TRACER CONSISTING OF ONE COMPLETE CARRIER)-OR-ONE SINGLE STRAND TRACER (ONE STRAND WITHIN CARRIER IS THE OPPOSITE COLOR). ALL STRANDS OF WHICH ARE WHITE, EXCEPT FOR WHITE SLEEVING, THE TRACERS ARE THEN BLACK.
3. REELS MAY HAVE SPLICES, DEPENDING ON LENGTH:

LENGTH	50 FT	100 FT	200 FT	500 FT	1000 FT
MAX SPLICES	0	1	1	2	3

4. SE200P & SE250P ARE ONLY OFFERED IN THE STANDARD PET MATERIALS.
5. THE MINIMUM HOLE I.D. FOR CABLE BUNDLE WITH SLEEVING SHALL BE BUNDLE DIAMETER PLUS 0.15 inches.
6. MILLIMETERS ARE IN [ ].

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00G	6/9/2023	RVU	JSUN	MSAD	J: ADDED NOTES 5 AND 6.	GAECN06792

TITLE
STANDARD BRAIDED EXPANDABLE SLEEVING (SE)
CUSTOMER DRAWING

ITEM REVISION NAME: G03597BX/00

DATASET FILE NAME: G03597BX_DC/00G GB0239KD CUST DWG

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .12 [3.05] .XXX ± .025 [.635]
.XX ± .062 [1.57] ANGLES ±
THIRD ANGLE PROJECTION

PANDUIT

MATERIAL: SEE TABLE

DRAWING NUMBER: GB0239KD

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
					A

D10100DA/20