
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	A CONDUCTOR RANGE	WIRE DIAMETER RANGE - IN	STUD SIZE	HEX NUT	BODY HEX	H ONE CABLE	C	RoHS COMPLIANT
SP1-8-C	12 SOL - 8 STR	.081-.146	1/4-20	.50 [13]	.38 [9]	.63 [16]	.50 [13]	N/A
SP1-8L-C	12 SOL - 8 STR	.081-.146	1/4-20	.50 [13]	.38 [9]	.63 [16]	1.00 [25]	N/A
SP1-7-C	8 SOL - 7 STR	.128-.164	1/4-20	.69 [17]	.50 [13]	.88 [22]	.50 [13]	N/A
SP1-7L-C	8 SOL - 7 STR	.128-.164	1/4-20	.69 [17]	.50 [13]	.88 [22]	1.00 [25]	N/A
SP1-4-C	10 SOL - 4 STR	.102-.232	5/16-18	.75 [19]	.56 [14]	.94 [24]	.56 [14]	N/A
SP1-4L-C	10 SOL - 4 STR	.102-.232	5/16-18	.75 [19]	.56 [14]	.94 [24]	1.00 [25]	YES
SP1-3-C	6 SOL - 3 STR	.162-.260	3/8-16	.81 [21]	.63 [16]	1.06 [27]	.63 [16]	N/A
SP1-3L-C	6 SOL - 3 STR	.162-.260	3/8-16	.81 [21]	.63 [16]	1.06 [27]	1.13 [29]	N/A
SP1-2-C	4 STR - 2 STR	.232-.292	3/8-16	.88 [22]	.69 [17]	1.06 [27]	.63 [16]	N/A
SP1-2L-C	4 STR - 2 STR	.232-.292	3/8-16	.88 [22]	.69 [17]	1.06 [27]	1.13 [29]	YES
SP1-1/0-L	6 SOL - 1/0 STR	.162-.375	1/2-13	1.00 [25]	.75 [19]	1.31 [33]	.75 [19]	N/A
SP1-1/0L-L	6 SOL - 1/0 STR	.162-.375	1/2-13	1.00 [25]	.75 [19]	1.31 [33]	1.25 [32]	N/A
SP1-2/0-Q	1 SOL - 2/0 STR	.289-.419	1/2-13	1.13 [29]	.88 [22]	1.44 [37]	.75 [19]	YES
SP1-2/0L-Q	1 SOL - 2/0 STR	.289-.419	1/2-13	1.13 [29]	.88 [22]	1.44 [37]	1.25 [32]	YES
SP1-4/0-Q	3/0 SOL - 4/0 STR	.410-.528	5/8-11	1.38 [35]	1.13 [29]	1.69 [43]	1.00 [25]	YES
SP1-4/0L-Q	3/0 SOL - 4/0 STR	.410-.528	5/8-11	1.38 [35]	1.13 [29]	1.69 [43]	1.50 [38]	YES
SP1-350-12	4/0 STR - 350 kcmil	.528-682	5/8-11	1.50 [38]	1.25 [32]	2.00 [51]	1.00 [25]	N/A
SP1-350L-12	4/0 STR - 350 kcmil	.528-682	5/8-11	1.50 [38]	1.25 [32]	2.00 [51]	1.50 [38]	N/A
SP1-500-12	250 kcmil - 500 kcmil	.575-.815	3/4-10	1.81 [46]	1.50 [38]	2.31 [59]	1.38 [35]	YES
SP1-500L-12	250 kcmil - 500 kcmil	.575-.815	3/4-10	1.81 [46]	1.50 [38]	2.31 [59]	1.75 [44]	N/A

NOTES:

1. MATERIAL: HIGH COPPER CONTENT HARD DRAWN ROD
2. USED FOR CONNECTING CONDUCTORS TO VARIOUS SIZES OF TAPPED HOLE
3. DIMENSIONS IN BRACKETS ARE MILLIMETERS.
4. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES

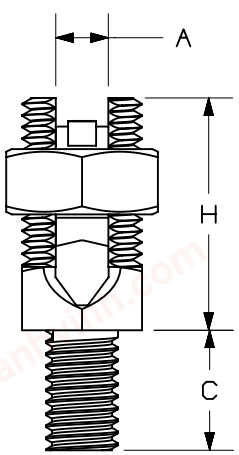

c UL us LISTED

DB RATED

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	7-24-23	JHNU	JHNU	MRWA	C. REVISED DRAWING NUMBER: N41213BA-DC WAS C41213 B. ADDED RoHS COMPLIANT COLUMN A. CONVERTED TO NX	133002

PART NUMBER: SEE TABLE

TITLE: BRONZE SERVICE POST CONNECTOR - SP1 SERIES

CUSTOMER DRAWING

ITEM REVISION NAME: N41213BA/03

DATASET FILE NAME: N41213BA-DC/03A

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: N41213BA-DC

DRAWN BY	DATE	CHK	SCALE	SHEET 1 OF 1	SIZE
TM	7-97	TM	NONE		A

A-SIZE CUSTOMER