
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

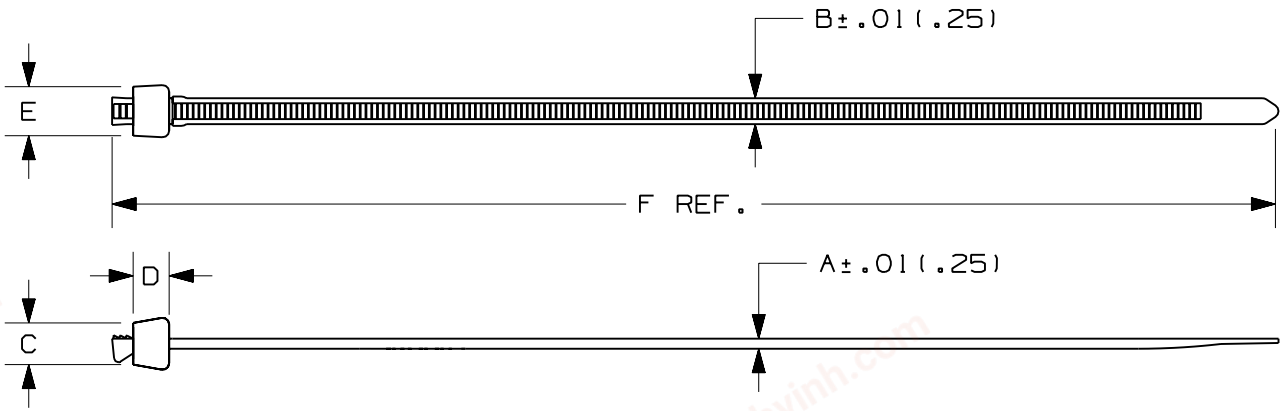

PANDUIT PART NO.*	BUNDLE DIA. MIN. in (mm)	BUNDLE DIA. MAX. in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS-SECTION	WEIGHT lbs./100pcs. (g)
SST2H	.06 (1.5)	2.00 (51)	.062 (1.6)	.300 (7.6)	.325 (8.3)	.250 (6.4)	.460 (11.7)	8.0 (203)	120 (534)	HEAVY	.62 (280)
SST4H	.06 (1.5)	4.00 (102)	.067 (1.7)	.300 (7.6)	.325 (8.3)	.250 (6.4)	.460 (11.7)	14.8 (376)	120 (534)	HEAVY	1.2 (537)
SST8H	.06 (1.5)	8.00 (203)	.067 (1.7)	.300 (7.6)	.325 (8.3)	.250 (6.4)	.460 (11.7)	27.5 (699)	120 (534)	HEAVY	2.1 (939)

NOTES:

*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
2) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
--	----	--		CORRECTED MATERIAL NAME TO NYLON 6.6	---- --		
2	12-8-05	ERW		CORRECTED METRIC CONVERSION OF SST2H MAX. BUNDLE DIA. (51)	5550 2		
--	----	--		REMOVED SST2.5H - OBSOLETE PART	---- --		
1	11-27-01	JABO	SP	REVISED AND REDRAWN	5550 1	SP	

PANDUIT CORP. TINLEY PARK, ILLINOIS

STA-STRAP CABLE TIES
SS SERIES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± ----- (.XXX) ± .020(.51)
(.XX) ± .02(.5) ANGLES ± -----

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: JABO
DATE: 11-27-01
CHK'D: SP
MAT'L: NYLON 6.6
SCALE: NONE
DRAWING NO.: SS-5550
SHEET 3 OF 3
DWG SIZE: A