
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

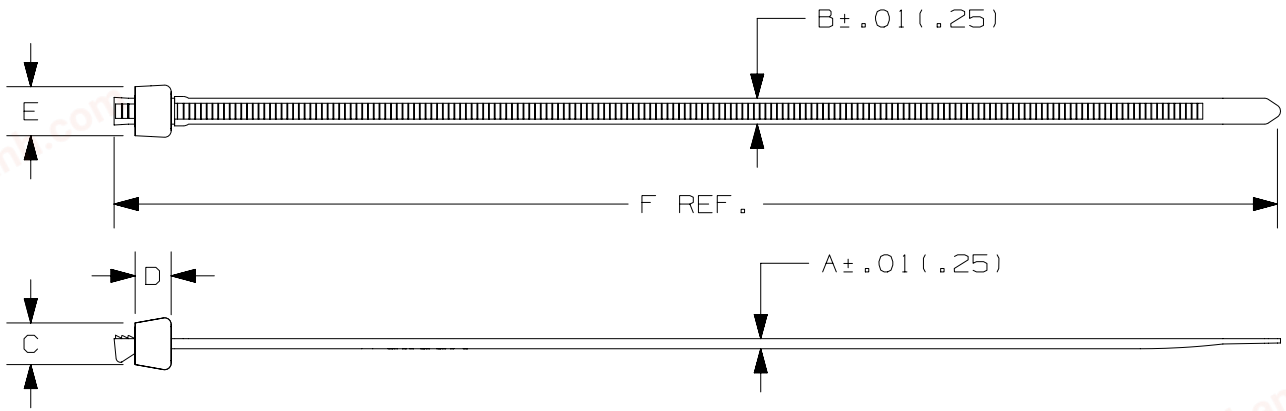


| PANDUIT PART NO.* | BUNDLE DIA. MIN. in (mm) | BUNDLE DIA. MAX. in (mm) | A in (mm) | B in (mm) | C in (mm) | D in (mm) | E in (mm) | F in (mm) | MIN. LOOP TENSILE lbs. (N) | CROSS-SECTION | WEIGHT lbs./100pcs. (g) |
|---|---|---|---|---|---|---|---|---|---|---|---|
| SST1.5S | .06 (1.5) | 1.25 (32) | .045 (1.2) | .180 (4.6) | .250 (6.4) | .165 (4.2) | .310 (7.9) | 5.7 (146) | 50 (222) | STANDARD | .18 (80) |
| SST2S | .06 (1.5) | 1.75 (45) | .045 (1.2) | .180 (4.6) | .250 (6.4) | .165 (4.2) | .310 (7.9) | 6.7 (172) | 50 (222) | STANDARD | .22 (100) |
| SST3S | .06 (1.5) | 3.00 (76) | .048 (1.2) | .180 (4.6) | .250 (6.4) | .165 (4.2) | .310 (7.9) | 11.0 (279) | 50 (222) | STANDARD | .44 (201) |
| SST4S | .06 (1.5) | 4.00 (102) | .048 (1.2) | .190 (4.8) | .253 (6.4) | .200 (5.1) | .350 (8.9) | 15.0 (381) | 50 (222) | STANDARD | .59 (266) |

(B)

(A) NOTES:

*1) SEE panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|---|---|---|---|---|---|---|
| 06A | 10-27-25 | BWG | JADE | DJSL | c. REVISED TITLE WITH ALTERNATIVE DESCRIPTION AND CORRECTION. | 011361/01 |
| 05A | 3.20.25 | BWG | JADE | DJSL | b. SST4S B DIMENSION WAS .180 (4.6)<br>a. CHANGED NOTES TO REFERENCE PANDUIT.COM, UPDATED TITLE BLOCK TO LATEST TEMPLATE | 011361/00 |

TITLE

(C) THROUGH-PANEL MOUNTING CABLE TIES
SS SERIES

CUSTOMER DRAWING

ITEM REVISION NAME: W10001CF/06

DATASET FILE NAME: W10001CF_DC/06A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± ____ .XXX ± .020(.51)
.XX ± .02(.5) ANGLES ± ____
THIRD ANGLE PROJECTION

MATERIAL: NYLON 6.6

DRAWING NUMBER: SS-5550

| DRAWN BY | DATE | CHK | SCALE | SIZE |
|---|---|---|---|---|
| LEF | 5/5/15 | BWG | NONE | A |

SHT 2 OF 3

D10100DA/16