
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:
*1. REFER TO www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR
2. SPLICING MAY OCCUR FOR ROLL SIZES LONGER THAN 10 FT.
3. REVERSE CUT.
4. SOME GAP WILL BE PRESENT BETWEEN WINDS
5. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS EUROPEAN DIRECTIVE ON THE RESTRICTION OF HAZARDOUS SUBSTANCES AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITEE.
6. DIMENSIONS IN [ ] ARE METRIC.

| *PANDUIT PART NUMBER | A IN [mm] | B IN [mm] | T IN [mm] | WEIGHT LBS (g)/ 100 FT |
|---|---|---|---|---|
| T12F | .125 [3.2] | .218 ±.047 [5.5 ±1.2] | .030 ±.006 [0.8 ±0.2] | 0.4 (200) |
| T19F | .188 [4.8] | .250 ±.047 [6.4 ±1.2] | .035 ±.008 [0.9 ±0.2] | 0.7 (300) |
| T25F | .250 [6.4] | .375 ±.047 [9.5 ±1.2] | .040 ±.008 [1.0 ±0.2] | 1.1 (500) |
| T38F | .375 [9.5] | .437 ±.047 [11.1 ±1.2] | .055 ±.010 [1.4 ±0.3] | 2.2 (1000) |
| T50F | .500 [12.7] | .500 ±.047 [12.7 ±1.2] | .060 ±.016 [1.5 ±0.4] | 3.3 (1500) |
| T62F | .625 [15.9] | .625 ±.047 [15.9 ±1.2] | .062 ±.020 [1.6 ±0.5] | 4.4 (2000) |
| T75F | .750 [19.1] | .875 ±.047 [22.2 ±1.2] | .065 ±.020 [1.7 ±0.5] | 5.6 (2550) |
| T100F | 1.000 [25.4] | 1.125 ±.047 [28.6 ±1.2] | .070 ±.020 [1.8 ±0.5] | 8.2 (3750) |

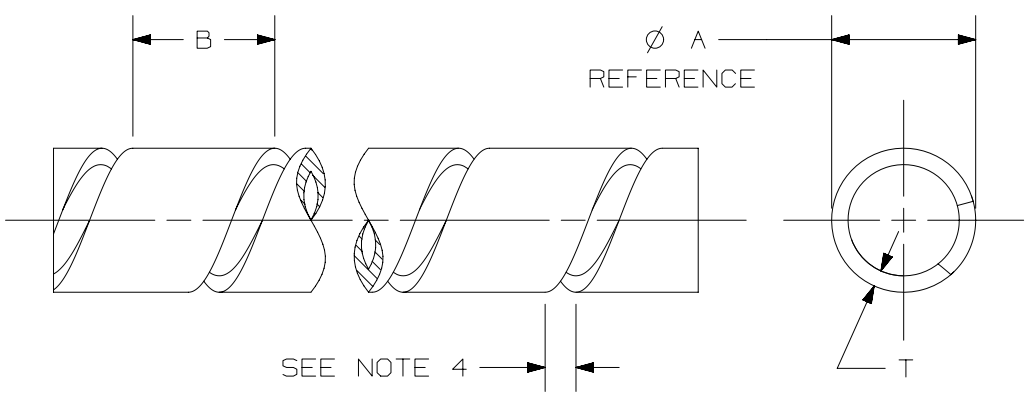


| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|---|---|---|---|---|---|---|
| 00A | 06/19/2024 | KLN | SEWH | MSAD | INITIAL RELEASE | GAECN07120/00 |

PART NUMBER: SEE TABLE

TITLE: POLYETHYLENE SPIRAL WRAP

CUSTOMER DRAWING

ITEM REVISION NAME: 03903NBB/00

DATASET FILE NAME: 03903NBB_DC/00A

THIRD ANGLE PROJECTION

MATERIAL: POLYETHYLENE

DRAWING NUMBER: 03903NBB-DC

| DRAWN BY | DATE | CHK | SCALE | SIZE |
|---|---|---|---|---|
| KLN | 06/19/2024 | MSAD | NONE | A |

SHEET 1 OF 1

A-SIZE CUSTOMER