
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART NUMBER*	MAT'L SUFFIX	MATERIAL	"D"	REC. FAST. *	WEIGHT lbs/100 pcs (g)/100 pcs	USE WITH THESE CABLE TIE CROSS-SECTIONS
TA1S8	NONE	NYLON 6/6	0.17 [4.3]	#8 (M4) SCREW	0.07 [32.0]	MINIATURE INTERMEDIATE STANDARD
	-0	WEATHER RESISTANT NYLON				
	-30	HEAT STABILIZED NYLON				
	-69	FLAME RETARDANT NYLON				
TA1S10	NONE	NYLON 6/6	0.20 [5.1]	#10 (M5) SCREW		
	-0	WEATHER RESISTANT NYLON				

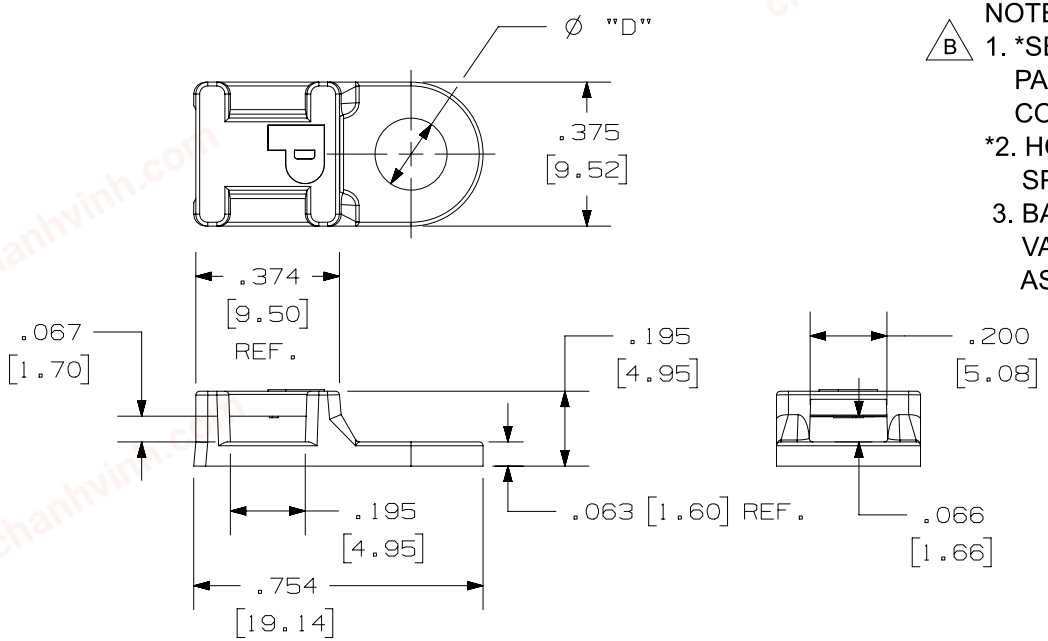

NOTES;

B

1. *SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE
*2. HOLE DIMENSIONS SHOULD ACCOMMODATE SPECIFIED RECOMMENDED FASTENER.
3. BAG MAY CONTAIN EXTRA PIECES TO COMPENSATE FOR VARIANCE IN THE PACKAGING PROCESS. PANDUIT ASSURES MINIMUM PIECE COUNT AS STATED ON THE BAG.

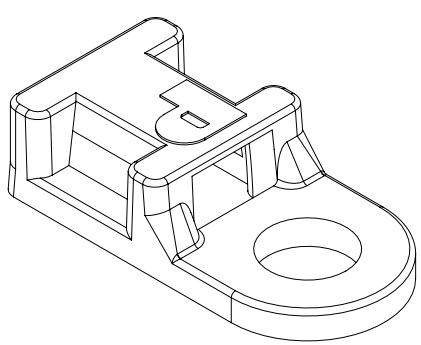

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	09.21.2026	JADE	BWG	MRJS	b. REVISED NOTE 1. a. DRAWING COMPLETELY REVISED. WAS GB0239EP/03	038932/00

TITLE

TIE ANCHOR MOUNT

CUSTOMER DRAWING

ITEM REVISION NAME: 02945NAL/00

DATASET FILE NAME: 02945NAL_DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± 0.05 [1.3] .XXX ± 0.01 [0.25]
.XX ± 0.02 [0.5] ANGLES ± 5 °
THIRD ANGLE PROJECTION

PANDUIT

MATERIAL: SEE TABLE

DRAWING NUMBER: 02945NAL_DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
AJV	12/17/96	JADE	NONE		A

D10100DA/20