
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

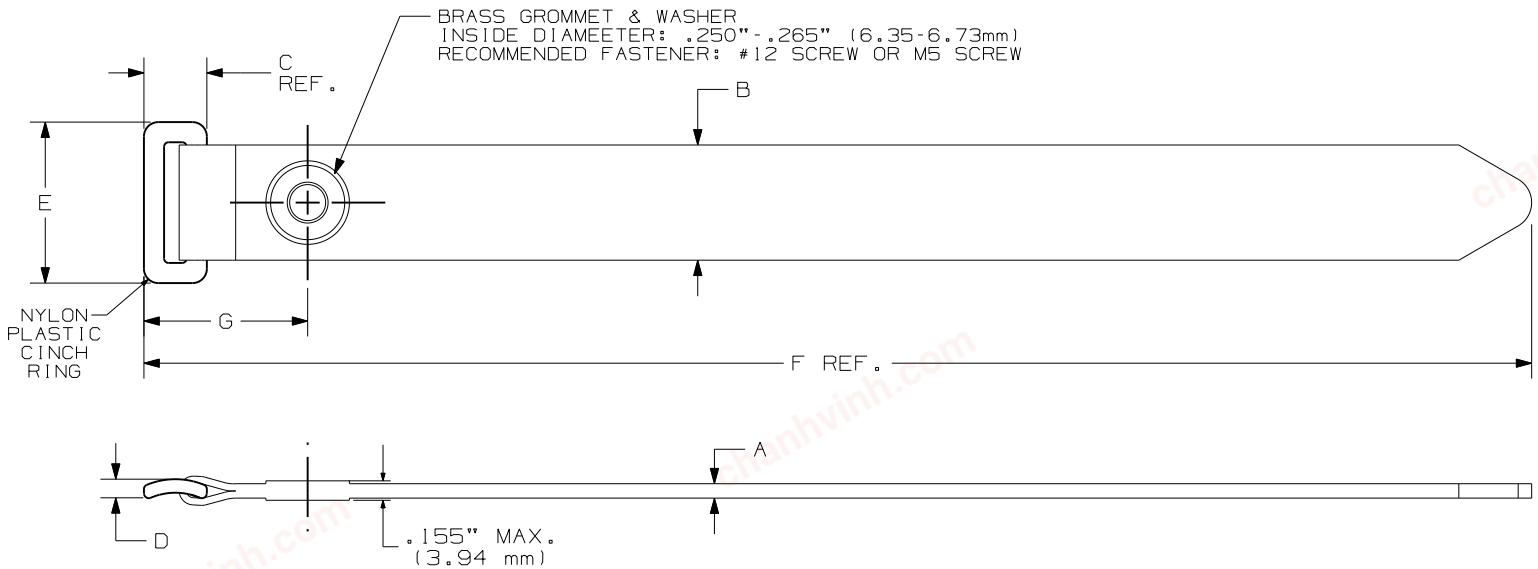

PANDUIT PART NO.	BUNDLE DIA. MIN. in (mm)	BUNDLE DIA. MAX. in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	APPROXIMATE WEIGHT lbs/100 PARTS (g)
UGCTC3S	1.0 (25.4)	3.0 (76.2)	.100 (2.5)	.85 (21.6)	.45 (11.4)	.14 (3.6)	1.10 (27.9)	12.0 (305)	.88 (22.4)	50 (222)	STANDARD	.81 (368)
UGCTC5S	1.0 (25.4)	5.0 (127)	.100 (2.5)	.85 (21.6)	.45 (11.4)	.14 (3.6)	1.10 (27.9)	18.0 (457)	.88 (22.4)	50 (222)	STANDARD	1.01 (456)

NOTES:
1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.
2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS.

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
8	1/13/12	CR-MBA	DJW	ALTERNATE MATERIAL ADDED; SPECIFIC COLOR REMOVED;	SS-27381 8	KLN	
7	4/12/06	FAB	DWW	ADDED WEIGHT TO DRAWING	27381 7	TGS	

SS_27381_00.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

TAK-TY HOOK & LOOP CABLE TIES
ULTRA-CINCH HOOK & LOOP TIES
CENTER MOUNT GROMMET

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± .25 (.XXX) ± .030
(.XX) ± .125 ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: JABO
DATE: 10/16/02
CHK'D: DWW

MAT'L: WOVEN HOOK/LOOP NYLON OR POLYESTER

SCALE: NONE
DRAWING NO.: SS-27381
DWG SIZE: A