chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PLC-INTERFACE for output functions, consisting of PLC-BPT…/ACT basic terminal block with Push-in connection and plug-in miniature solid-state relay, for mounting on DIN rail NS 35/7,5, 1 N/O contact, input: 24 V DC, output: 24-253 V AC/2 A

Commercial data

Item number	1176854
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	*****
Product key	DK62B4
GTIN	4063151209704
Weight per piece (including packing)	70.7 g
Weight per piece (excluding packing)	56.8 g
Customs tariff number	85364900
Country of origin	DE

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

Technical data

Product properties

Product type	Solid-state relay module
Product family	PLC-INTERFACE
Application	Output function
Operating mode	100% operating factor

Insulation characteristics: Air clearances and creepage distances between the power circuits

Insulation	Basic insulation
Overvoltage category	III
Pollution degree	2

Data management status

Date of last data management	13.11.2024

Electrical properties

Test voltage (Input/output)	2.5 kV_{rms} (50 Hz, 1 min.)

Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V AC
Rated surge voltage	4 kV

Input data

Rated actuating voltage U_C	24 V DC
Voltage range with reference to U_C	0.8 ... 1.2
Rated actuating current I_C	9 mA
Nominal voltage (plugged-in solid-state relay)	24 V DC
Switching threshold "0" signal in reference to U_N	≤ 0.4
Switching threshold "1" signal in reference to U_N	≥ 0.8
Typical response time	10 ms
Typical turn-off time	10 ms
Operating voltage display	Yellow LED
Protective circuit	Reverse polarity protection; Polarity protection diode
	Freewheeling diode; Freewheeling diode
Transmission frequency	10 Hz

Output data

Contact switching type	1 N/O contact
Design of digital output	electronic
Output voltage range	24 V AC ... 253 V AC
Limiting continuous current	2 A (see derating curve)
Min. load current	25 mA
Leakage current	1 mA
Surge current	30 A (tp = 10 ms, 25 °C)

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

Max. load value	4 A^2s (tp = 10 ms, 25 °C)
Peak offstate voltage	600 V
Voltage drop at max. limiting continuous current	1 V
Output circuit	2-conductor floating, zero voltage switch
Protective circuit	RC element

Connection data

Connection method	Push-in connection
Stripping length	10 mm
Conductor cross section rigid	0.14 mm² ... 2.5 mm²
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
	2x 0.5 mm² ... 1 mm² (TWIN ferrule)
Conductor cross section AWG	26 ... 14

Dimensions

Width	14 mm
Height	80 mm
Depth	94 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection (Relay)	IP20
Degree of protection (Installation location)	≤ IP54
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Altitude	≤ 2000 m

Standards and regulations

Air clearances and creepage distances between the power circuits

Standards/regulations	IEC 60947-5-1

Mounting

Mounting type	DIN rail mounting
Assembly note	in rows with zero spacing

chanhvinh.com


PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854


Drawings

Diagram

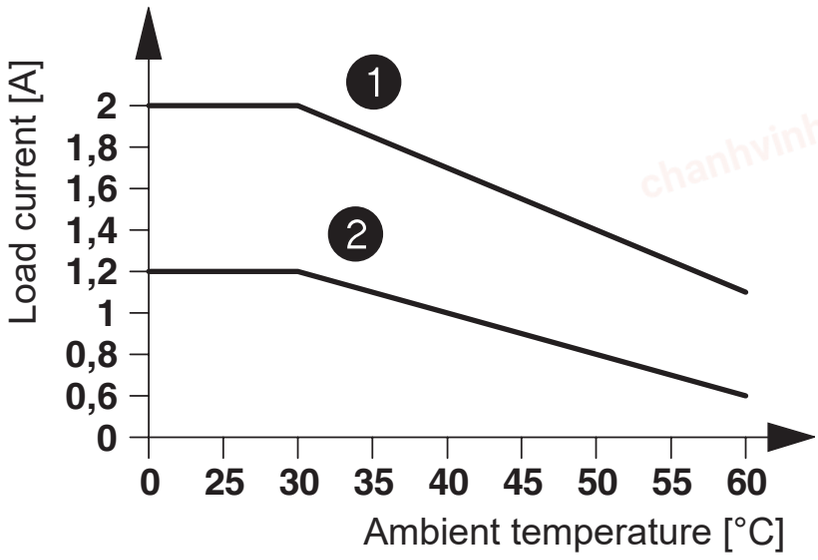

1 In rows with 10 mm spacing
2 In rows with zero spacing

Circuit diagram

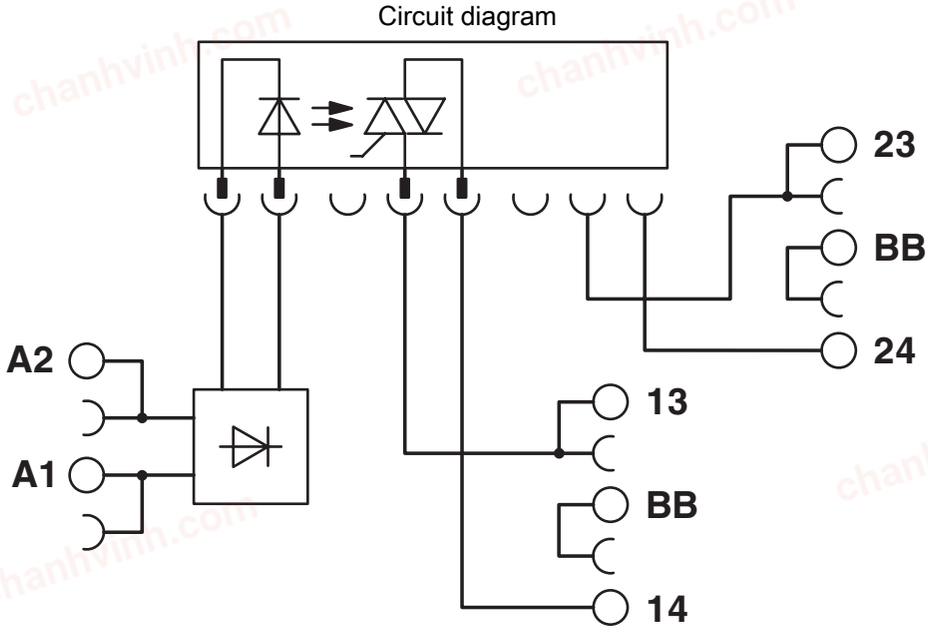

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/in/products/1176854

cULus Listed
Approval ID: E140324

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

Classifications

ECLASS

ECLASS-11.0	27371604
ECLASS-12.0	27371604
ECLASS-13.0	27371604

ETIM

ETIM 9.0	EC001504

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Hexahydromethylphthalic anhydride(CAS: n/a)
	Lead(CAS: 7439-92-1)
SCIP	4e739a2a-754d-4ac6-82c3-7258a584ae51

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

Accessories

Note: Applying some accessories below might limit this product.

FBST 500-PLC RD - Continuous plug-in bridge

2966786

https://www.phoenixcontact.com/in/products/2966786




Continuous plug-in bridge, length: 500 mm, color: red

Max. current carrying capacity: 32 A

FBST 500-PLC BU - Continuous plug-in bridge

2966692

https://www.phoenixcontact.com/in/products/2966692



Continuous plug-in bridge, length: 500 mm, color: blue

Max. current carrying capacity: 32 A

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

FBST 500-PLC GY - Continuous plug-in bridge

2966838

https://www.phoenixcontact.com/in/products/2966838




Continuous plug-in bridge, length: 500 mm, color: gray

Max. current carrying capacity: 32 A

FBST 6-PLC RD - Single plug-in bridge

2966236

https://www.phoenixcontact.com/in/products/2966236



Single plug-in bridge, number of positions: 2, length: 6 mm, color: red

Max. current carrying capacity: 6 A

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

FBST 6-PLC BU - Single plug-in bridge

2966812

https://www.phoenixcontact.com/in/products/2966812

Single plug-in bridge, number of positions: 2, length: 6 mm, color: blue



Max. current carrying capacity: 6 A

FBST 6-PLC GY - Single plug-in bridge

2966825

https://www.phoenixcontact.com/in/products/2966825

Single plug-in bridge, number of positions: 2, length: 6 mm, color: gray



Max. current carrying capacity: 6 A

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

FBST 8-PLC GY - Single plug-in bridge

2967688

https://www.phoenixcontact.com/in/products/2967688

Single plug-in bridge, number of positions: 2, length: 8 mm, color: gray



Max. current carrying capacity: 6 A

FBST 14-PLC BK - Single plug-in bridge

2967691

https://www.phoenixcontact.com/in/products/2967691

Single plug-in bridge, number of positions: 2, length: 14 mm, color: black



Max. current carrying capacity: 10 A

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

ZB 10:UNBEDRUCKT - Zack marker strip

1053001

https://www.phoenixcontact.com/in/products/1053001



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 10.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 10.15 mm

ZB 10 CUS - Zack marker strip

0824941

https://www.phoenixcontact.com/in/products/0824941



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 10.15 mm

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

ZB10,LGS:FORTL.ZAHLEN - Zack marker strip

1053014

https://www.phoenixcontact.com/in/products/1053014



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 10.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 10.15 mm

ZB10,QR:FORTL.ZAHLEN - Zack marker strip

1053027

https://www.phoenixcontact.com/in/products/1053027



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 10.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 10.15 mm

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

ZB10,LGS:L1-N,PE - Marker for terminal blocks

1053412

https://www.phoenixcontact.com/in/products/1053412



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 10.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 10.15 mm

ZB10,LGS:U-N - Marker for terminal blocks

1053438

https://www.phoenixcontact.com/in/products/1053438



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: U, V, W, N, GND, U, V, W, N, GND, mounting type: latching, for terminal block width: 10.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 10.15 mm

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

UC-TM 10 - Marker for terminal blocks

0818069

https://www.phoenixcontact.com/in/products/0818069



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 10.2 mm, Number of individual labels: 48, text field height: 10.5 mm, text field width: 9.6 mm

UC-TM 10 CUS - Marker for terminal blocks

0824605

https://www.phoenixcontact.com/in/products/0824605



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, Number of individual labels: 48, text field height: 10.5 mm, text field width: 9.6 mm

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

UCT-TM 10 - Marker for terminal blocks

0829142

https://www.phoenixcontact.com/in/products/0829142



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: latching, for terminal block width: 10.2 mm, Number of individual labels: 36, text field height: 9.6 mm, text field width: 8.9 mm

UCT-TM 10 CUS - Marker for terminal blocks

0829623

https://www.phoenixcontact.com/in/products/0829623



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, Number of individual labels: 36, text field height: 9.6 mm, text field width: 8.9 mm

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

ZB 12:UNPRINTED - Zack marker strip

0812120

https://www.phoenixcontact.com/in/products/0812120



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 12.2 mm, Number of individual labels: 5, text field height: 10.5 mm, text field width: 12.15 mm

ZB 12 CUS - Zack marker strip

0824942

https://www.phoenixcontact.com/in/products/0824942



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12.2 mm, Number of individual labels: 5, text field height: 12.15 mm, text field width: 10.5 mm

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

ZB 12,LGS:L1-N,PE - Zack marker strip

0812146

https://www.phoenixcontact.com/in/products/0812146



Zack marker strip, Strip, white, labeled, printed horizontally: L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 12.2 mm, Number of individual labels: 5, text field height: 10.5 mm, text field width: 12.15 mm

UC-TM 12 - Marker for terminal blocks

0819194

https://www.phoenixcontact.com/in/products/0819194



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 12 mm, Number of individual labels: 40, text field height: 10.5 mm, text field width: 11.45 mm

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

UC-TM 12 CUS - Marker for terminal blocks

0824613

https://www.phoenixcontact.com/in/products/0824613



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12 mm, Number of individual labels: 40, text field height: 10.5 mm, text field width: 11.45 mm

UCT-TM 12 - Marker for terminal blocks

0829144

https://www.phoenixcontact.com/in/products/0829144



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: latching, for terminal block width: 12 mm, Number of individual labels: 30, text field height: 9.6 mm, text field width: 10.8 mm

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

UCT-TM 12 CUS - Marker for terminal blocks

0829630

https://www.phoenixcontact.com/in/products/0829630



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12 mm, Number of individual labels: 30, text field height: 9.6 mm, text field width: 10.8 mm

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/in/products/0801733



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/in/products/0801681



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/in/products/1204119



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/in/products/1204122



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/in/products/0801704



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

https://www.phoenixcontact.com/in/products/1206421



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/in/products/1206434



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/in/products/0801762



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

https://www.phoenixcontact.com/in/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5



chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

https://www.phoenixcontact.com/in/products/1201730



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

https://www.phoenixcontact.com/in/products/1201714



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

https://www.phoenixcontact.com/in/products/0806602



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

https://www.phoenixcontact.com/in/products/1204135



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

https://www.phoenixcontact.com/in/products/1201756



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

https://www.phoenixcontact.com/in/products/1206599



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

https://www.phoenixcontact.com/in/products/1206586



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

https://www.phoenixcontact.com/in/products/1201895



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

NS 35/15 CAP - End cap

1206573

https://www.phoenixcontact.com/in/products/1206573

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

https://www.phoenixcontact.com/in/products/1201798



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

PLC-ATP BK - Separating plate

2966841

https://www.phoenixcontact.com/in/products/2966841



Separating plate, 2 mm thick, required at the start and end of a PLC terminal strip. Furthermore, it is used for: visual separation of groups, safe isolation of different voltages of neighboring PLC relays in acc. with DIN VDE 0106-101, isolation

PLC-ESK GY - Power terminal block

2966508

https://www.phoenixcontact.com/in/products/2966508



Power terminal block, for the input of up to four potentials, for mounting on NS 35/7.5

chanhvinh.com

PLC-OPT- 24DC/230AC/ 2/ACT - Solid-state relay module

1176854

https://www.phoenixcontact.com/in/products/1176854

SZF 1-0,6X3,5 - Screwdriver

1204517

https://www.phoenixcontact.com/in/products/1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

OPT-24DC/230AC/ 2 - Miniature solid-state relay

2982171

https://www.phoenixcontact.com/in/products/2982171



Plug-in miniature solid-state relay, power solid-state relay, 1 N/O contact, input: 24 V DC, output: 24 - 253 V AC/2 A

Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in