chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 4-position, PVC, yellow, Plug straight M12, coding: A, on Socket straight M8, coding: A, cable length: 1.5 m

Commercial data

Item number	1406215
Packing unit	1 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Sales key	BF1
Product key	AF1ICB
GTIN	4046356798358
Weight per piece (including packing)	53.1 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85444290
Country of origin	US

chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

Technical data

Product properties

Product type	Sensor/actuator cable
Application	Standard, U.S. cables
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	A

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	HB
Seal material	NBR
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated
Outer sheath, material	PVC

Electrical properties

Insulation resistance	≥ 100 MΩ
Nominal voltage U_N	48 V AC
	60 V DC
Nominal current I_N	4 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 100

Signaling

Status display	no
Status display present	No

Connection data

Conductor connection

Tightening torque	0.4 Nm (M12 connector)
	0.2 Nm (M8 connectors)

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

Connector

Connection 1

Type	Plug straight M12
Number of positions	4
Coding type	A


Connection 2

Type	Socket straight M8
Number of positions	4
Coding type	A

Cable/line

Cable length	1.5 m

PVC yellow 105 °C [542]

Dimensional drawing	
Cable weight	25 kg/km
UL AWM Style	2517 (105 °C / 300 V)
Number of positions	4
Shielded	no
Cable type	PVC yellow 105 °C [542]
Conductor structure signal line	32x 1.10 mm
AWG signal line	24
Wire diameter incl. insulation	1.12 mm ±0.03 mm
External cable diameter	4.40 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	yellow
Conductor material	Tin-plated Cu litz wires
Material wire insulation	PVC
Single wire, color	brown, blue, black, white
Overall twist	4 wires, twisted
Max. conductor resistance	max. 79.7 Ω/km (20 °C)
Insulation resistance	≥ (550 M Ohms/m @ 500V)
Nominal voltage, cable	300 V
Minimum bending radius, flexible installation	8 x D
Smallest bending radius, movable installation	36 mm

chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

Flame resistance	FT4
Other resistance	UV resistant
Ambient temperature (operation)	-30 °C ... 105 °C (cable, fixed installation)
	-5 °C ... 105 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
	IP68
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
	-40 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 80 °C (Cable, flexible installation)

Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101
Standard designation	M8 connector
Standards/specifications	IEC 61076-2-104

chanhvinh.com


SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215


Drawings

Dimensional drawing

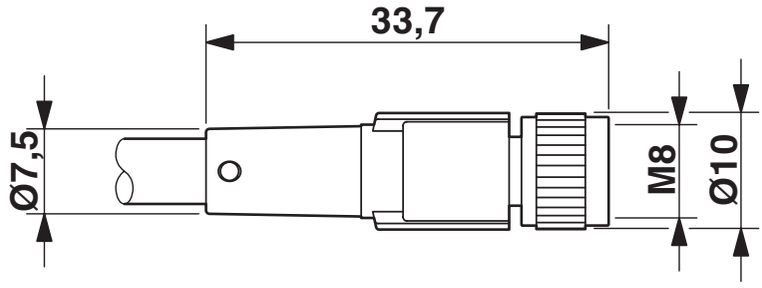

Socket M8 x 1, straight

Schematic diagram

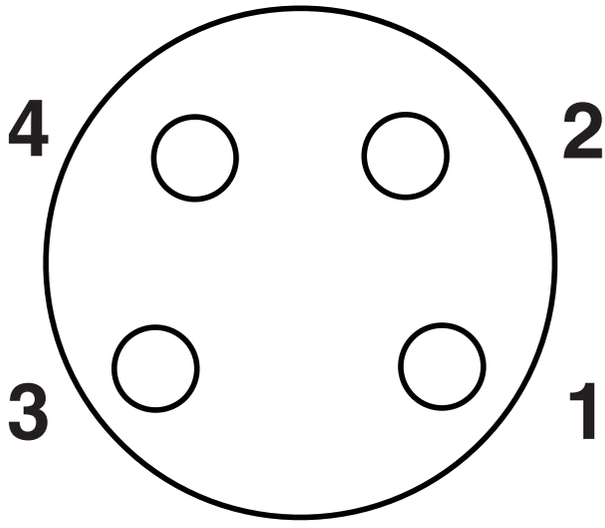

Pin assignment M8 socket, 4-pos., view female side


chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215


https://www.phoenixcontact.com/in/products/1406215

Dimensional drawing

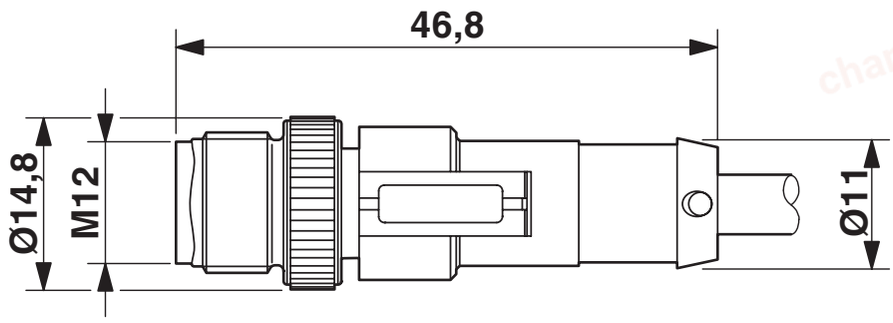

Plug, M12 x 1, straight, shielded

Circuit diagram

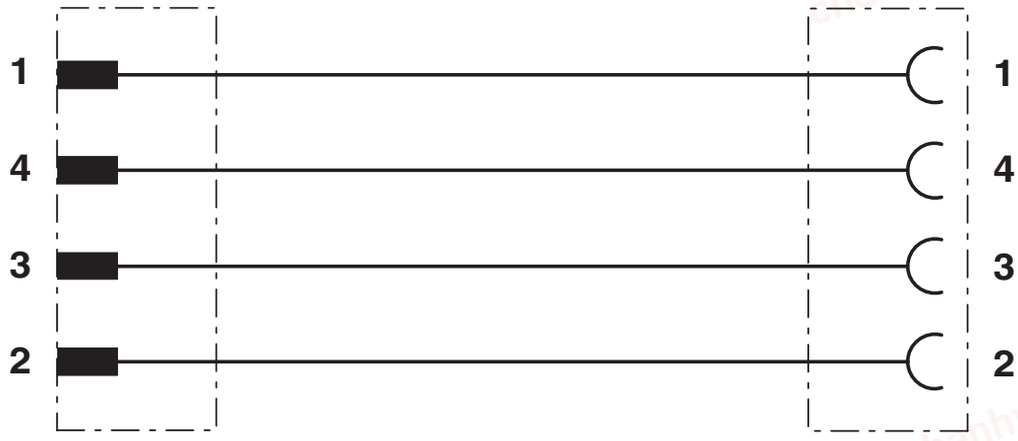

Contact assignment of M12 plugs / M8 sockets


chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

Schematic diagram

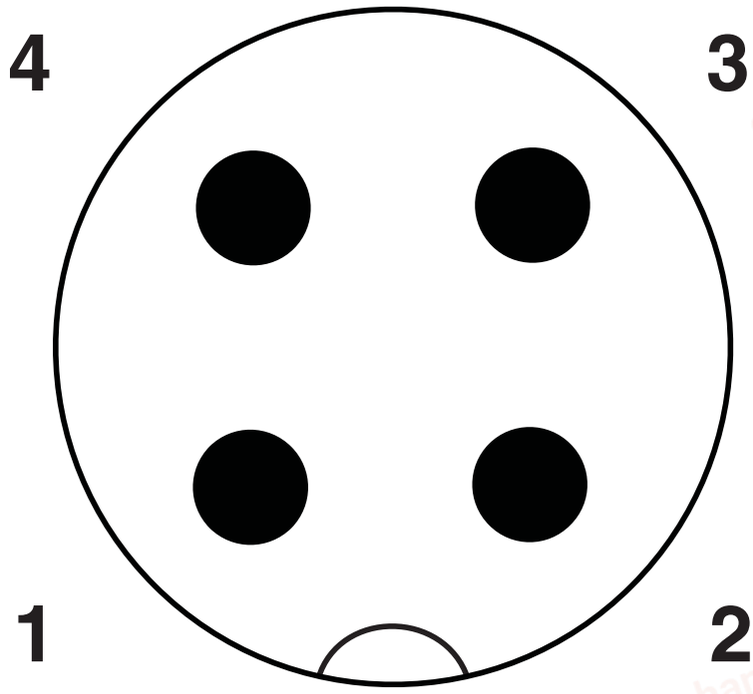

Pin assignment M12 plug, 4-pos., A-coded, view plug side

chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/in/products/1406215

UL Listed
Approval ID: FILE E 221474

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	30 V	4 A	-	-

cUL Listed
Approval ID: FILE E 221474

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	30 V	4 A	-	-

cULus Listed

chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

ETIM

ETIM 9.0	EC001855

UNSPSC

UNSPSC 21.0	26121600

chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

EF3.0 Climate Change

CO2e kg	0.415 kg CO2e

chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

Accessories

PROT-M12 FS-PA-CHAIN - Sealing cap

1430873

https://www.phoenixcontact.com/in/products/1430873

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



SAC-M12-EXCLIP-M - Locking clip

1558988

https://www.phoenixcontact.com/in/products/1558988

Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

UCT-WMT (23X4) - Conductor marker

0801453

https://www.phoenixcontact.com/in/products/0801453



Conductor marker, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: insert, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 30, text field height: 4 mm, text field width: 23 mm

UC-WMT (23X4) - Conductor marker

0819411

https://www.phoenixcontact.com/in/products/0819411



Conductor marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: insert, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 24, text field height: 4 mm, text field width: 23 mm

chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

US-WMT (23X4) - Cable marker

0828769

https://www.phoenixcontact.com/in/products/0828769



Cable marker, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 56, text field height: 4 mm, text field width: 23 mm

WMTW (23X4)R - Cable marker

0831004

https://www.phoenixcontact.com/in/products/0831004



Cable marker, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: insert, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 3000, text field height: 4 mm, text field width: 23 mm

chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

PROT-M 8 MS-PA-CHAIN - Screw plug

1430860

https://www.phoenixcontact.com/in/products/1430860

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets



B-STIFT - Marker pen

1051993

https://www.phoenixcontact.com/in/products/1051993

Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm



chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

TSD 02 SAC - Torque screwdriver

1208487

https://www.phoenixcontact.com/in/products/1208487



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

SAC BIT M8-D10 - Tool

1208461

https://www.phoenixcontact.com/in/products/1208461



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

TSD 04 SAC - Torque screwdriver

1208429

https://www.phoenixcontact.com/in/products/1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

TSD-M 1,2NM - Torque screwdriver

1212224

https://www.phoenixcontact.com/in/products/1212224



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

chanhvinh.com

SAC-4P-M12MS/ 1,5-542/M8 FS BK - Sensor/actuator cable

1406215

https://www.phoenixcontact.com/in/products/1406215

TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

https://www.phoenixcontact.com/in/products/1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

SAC BIT M12-D15 - Tool

1208432

https://www.phoenixcontact.com/in/products/1208432



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in