chanhvinh.com

# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Network cable, Ethernet CAT6$_A$ (10 Gbps), CC-Link IE CAT6$_A$ (10 Gbps), 8-position, PUR halogen-free, water blue RAL 5021, shielded (Advanced Shielding Technology), Plug straight M12, coding: X / IP67, on Plug straight RJ45 / IP20, cable length: 10 m

## Commercial data

| | |
|---|---|
| Item number | 1407474 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Product key | AF1CMJ |
| Catalog page | Page 403 (C-2-2019) |
| GTIN | 4046356776738 |
| Weight per piece (including packing) | 487.8 g |
| Weight per piece (excluding packing) | 433.4 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

chanhvinh.com

# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474

## Technical data

### Notes

| | |
|---|---|
| General | Further products with variable cable type and variable cable length can be found in the accessories section |

### Product properties

| | |
|---|---|
| Product type | Data cable preassembled |
| Application | Standard |
| Sensor type | Ethernet |
| Number of positions | 8 |
| Shielded | yes |
| Coding | X |

### Interfaces

| | |
|---|---|
| Bus system | Ethernet |
| Signal type/category | Ethernet $CAT6_A$, 10 Gbps |
| | CC-Link IE $CAT6_A$, 10 Gbps |

### Signaling


| | |
|---|---|
| Status display | no |
| Status display present | No |

### Electrical properties

| | |
|---|---|
| Nominal voltage $U_N$ | 48 V AC |
| | 60 V DC |
| Nominal current $I_N$ | 0.5 A |
| Transmission medium | Copper |
| Transmission characteristics (category) | $CAT6_A$ |

### Connector

Connection 1

| | |
|---|---|
| Dimensional drawing |  Pin assignment of M12 plug, 8-pos., X-coded, pin side view |
| Type | M12 Plug, straight, 8-position, shielded (Advanced Shielding Technology), Keying: X |
| Number of positions | 8 |
| Shielded | yes |
| Shielding | Advanced Shielding Technology |

chanhvinh.com


# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474

| | |
|---|---|
| Signal type/category | Ethernet CAT6$_A$, 10 Gbps |
| | CC-Link IE CAT6$_A$, 10 Gbps |
| Insertion/withdrawal cycles | ≥ 100 |
| Insulation resistance | ≥ 100 Ω |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Tightening torque | 0.4 Nm (M12 connector) |
| Material Contact | CuZn |
| Material Contact surface | Ni/Au |
| Material Contact carrier | PA 6.6 |
| Material Screw connection | Die-cast zinc, nickel-plated |
| Material Grip body | TPU, hardly inflammable, self-extinguishing |
| Material Seal | FKM |
| Flammability rating according to UL 94 | V0 |
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) | -25 °C ... 85 °C |
| Standard designation | M12 connector |
| Standards/regulations | IEC 61076-2-109 |

Connection 2

| | |
|---|---|
| Dimensional drawing |  Connector pin assignment plug RJ45 |
| Type | RJ45 Plug, straight, 8-position |
| Number of positions | 8 |
| Signal type/category | Ethernet CAT6$_A$, 10 Gbps |
| | CC-Link IE CAT6$_A$, 10 Gbps |
| Insertion/withdrawal cycles | ≥ 750 |
| Insulation resistance | ≥ 100 Ω |
| Overvoltage category | I |
| Degree of pollution | 2 |
| Material Contact | CuSn |
| Material Contact surface | Ni/Au |
| Material Contact carrier | PC |
| Material Housing | PA |
| Flammability rating according to UL 94 | V2 |
| Degree of protection | IP20 (RJ45 connector) |

chanhvinh.com

# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474


https://www.phoenixcontact.com/pc/products/1407474

| | |
|---|---|
| Ambient temperature (operation) | -25 °C ... 60 °C |

## Cable/line

| | |
|---|---|
| Cable length | 10 m |

### Ethernet 10 Gbit [94F]

| | |
|---|---|
| Dimensional drawing |  |
| Cable weight | 42 kg/km |
| UL AWM Style | 20963 (80°C/30 V) |
| Number of positions | 8 |
| Shielded | yes |
| Cable type | Ethernet 10 Gbit [94F] |
| Conductor structure | 4x2xAWG26/7; S/FTP |
| Signal runtime | 5.13 ns/m |
| Conductor structure signal line | 7x 0.16 mm |
| AWG signal line | 26 |
| Conductor cross section | 4x 2x 0.14 mm² |
| Wire diameter incl. insulation | 1.04 mm |
| External cable diameter | 6.40 mm ±0.2 mm |
| Outer sheath, material | PUR |
| External sheath, color | water blue RAL 5021 |
| Conductor material | Bare Cu litz wires |
| Material wire insulation | Foamed PE |
| Single wire, color | white/blue-blue, white/orange-orange, white/green-green, white/brown-brown |
| Thickness, outer sheath | 0.65 mm |
| Twisted pairs | 2 cores to the pair |
| Type of pair shielding | Aluminum-lined foil |
| Overall twist | 4 pairs for core |
| Optical shield covering | 70 % |
| Insulation resistance | ≥ 500 MΩ*km |
| Loop resistance | ≤ 290.00 Ω/km |
| Wave impedance | 100 Ω ±5 Ω (at 100 MHz) |
| Cable capacity | 47 nF/km |
| Nominal voltage, cable | ≤ 100 V |
| Test voltage Core/Core | 700 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 700.00 V (50 Hz, 1 min.) |

chanhvinh.com

# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474

| | |
|---|---|
| Minimum bending radius, fixed installation | 4 x D |
| Minimum bending radius, flexible installation | 8 x D |
| Smallest bending radius, fixed installation | 26 mm |
| Smallest bending radius, movable installation | 52 mm |
| Tensile strength | ≤ 100 N |
| Near end crosstalk attenuation (NEXT) | 75.3 dB (with 1 MHz) |
| | 66.3 dB (at 4 MHz) |
| | 61.8 dB (at 8 MHz) |
| | 60.3 dB (at 10 MHz) |
| | 57.2 dB (at 16 MHz) |
| | 55.8 dB (at 20 MHz) |
| | 54.3 dB (at 25 MHz) |
| | 52.8 dB (at 31.25 MHz) |
| | 48.4 dB (at 62.5 MHz) |
| | 45.3 dB (at 100 MHz) |
| | 40.8 dB (at 200 MHz) |
| | 39.3 dB (at 250 MHz) |
| | 38.1 dB (at 300 MHz) |
| | 38.1 dB (at 400 MHz) |
| | 38.1 dB (at 500 MHz) |
| Power-summated near end crosstalk attenuation (PSNEXT) | 72.3 dB (with 1 MHz) |
| | 63.3 dB (at 4 MHz) |
| | 58.8 dB (at 8 MHz) |
| | 57.3 dB (at 10 MHz) |
| | 54.2 dB (at 16 MHz) |
| | 52.8 dB (at 20 MHz) |
| | 51.3 dB (at 25 MHz) |
| | 49.9 dB (at 31.25 MHz) |
| | 45.4 dB (at 62.5 MHz) |
| | 42.3 dB (at 100 MHz) |
| | 37.8 dB (at 200 MHz) |
| | 36.3 dB (at 250 MHz) |
| | 35.1 dB (at 300 MHz) |
| | 33.3 dB (at 400 MHz) |
| | 31.8 dB (at 500 MHz) |
| Return attenuation (RL) | 20 dB (with 1 MHz) |
| | 23 dB (at 4 MHz) |
| | 24.5 dB (at 8 MHz) |
| | 25 dB (at 10 MHz) |
| | 25 dB (at 16 MHz) |
| | 25 dB (at 20 MHz) |
| | 24.2 dB (at 25 MHz) |
| | 23.3 dB (at 31.25 MHz) |
| | 20.7 dB (at 62.5 MHz) |

chanhvinh.com

# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474

| | |
|---|---|
| | 19 dB (at 100 MHz) |
| | 16.4 dB (at 200 MHz) |
| | 15.6 dB (at 250 MHz) |
| | 15.6 dB (at 300 MHz) |
| | 15.6 dB (at 400 MHz) |
| | 15.6 dB (at 500 MHz) |
| Shield attenuation | 3.1 dB (with 1 MHz) |
| | 5.7 dB (at 4 MHz) |
| | 8 dB (at 8 MHz) |
| | 8.9 dB (at 10 MHz) |
| | 11.2 dB (at 16 MHz) |
| | 12.6 dB (at 20 MHz) |
| | 14.1 dB (at 25 MHz) |
| | 15.8 dB (at 31.25 MHz) |
| | 22.5 dB (at 62.5 MHz) |
| | 28.7 dB (at 100 MHz) |
| | 41.4 dB (at 200 MHz) |
| | 46.6 dB (at 250 MHz) |
| | 51.4 dB (at 300 MHz) |
| | 60.1 dB (at 400 MHz) |
| | 67.9 dB (at 500 MHz) |
| | ≥ 80.00 dB (at 30 ... 100 MHz) |
| Halogen-free | according to IEC 60754-1 |
| Flame resistance | according to IEC 60332-1-2 |
| | in accordance with UN ECE-R 118.03 |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -20 °C ... 80 °C (Cable, flexible installation) |
| Ambient temperature (installation) | -20 °C ... 80 °C |

## Environmental and real-life conditions

Ambient conditions

| | |
|---|---|
| Degree of protection | IP65 (M12 connector) |
| | IP67 (M12 connector) |
| | IP20 (RJ45 connector) |

## Standards and regulations

M12

| | |
|---|---|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-109 |

chanhvinh.com


# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474


## Drawings

Dimensional drawing

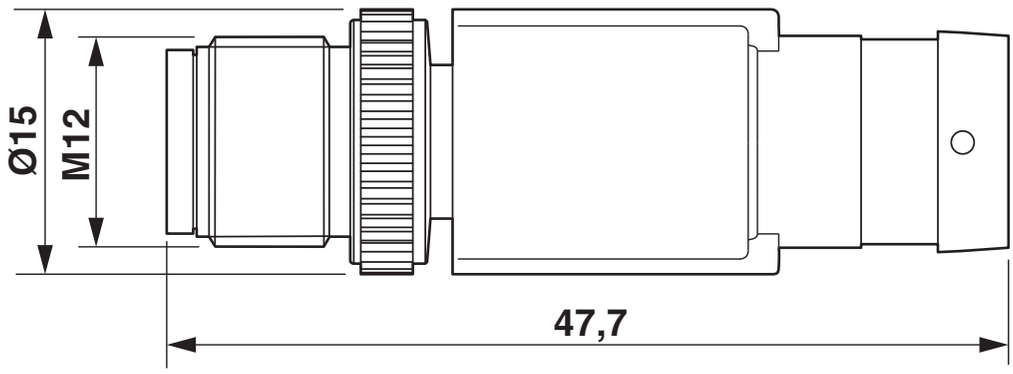


Plug, M12 x 1, straight, shielded

Dimensional drawing

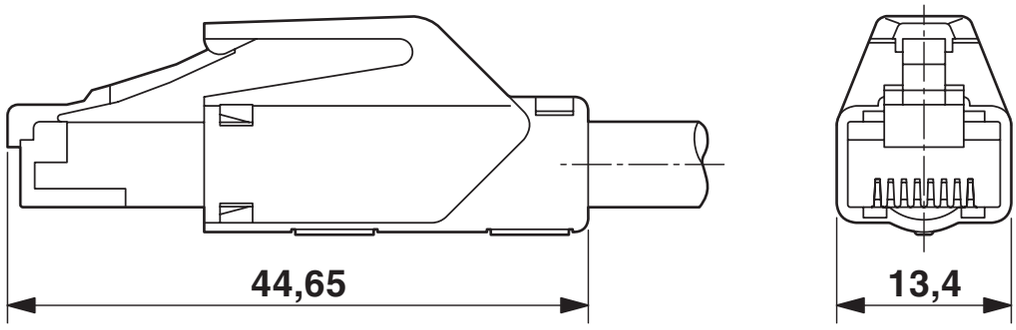


RJ45 connector, IP20


chanhvinh.com

# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474

Schematic diagram

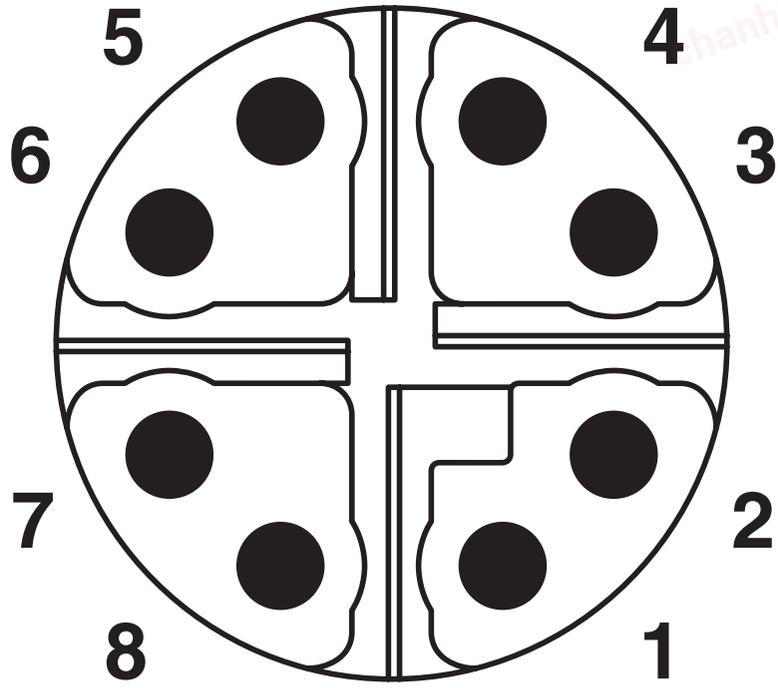


Pin assignment of M12 plug, 8-pos., X-coded, pin side view


chanhvinh.com

# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474

Schematic diagram

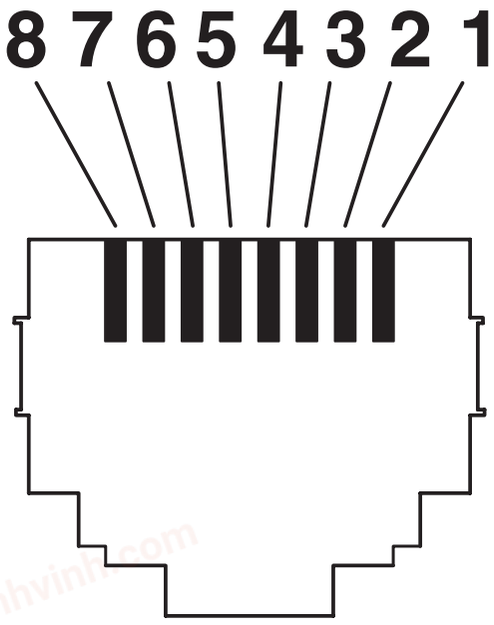


Connector pin assignment plug RJ45


chanhvinh.com

# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474

Circuit diagram

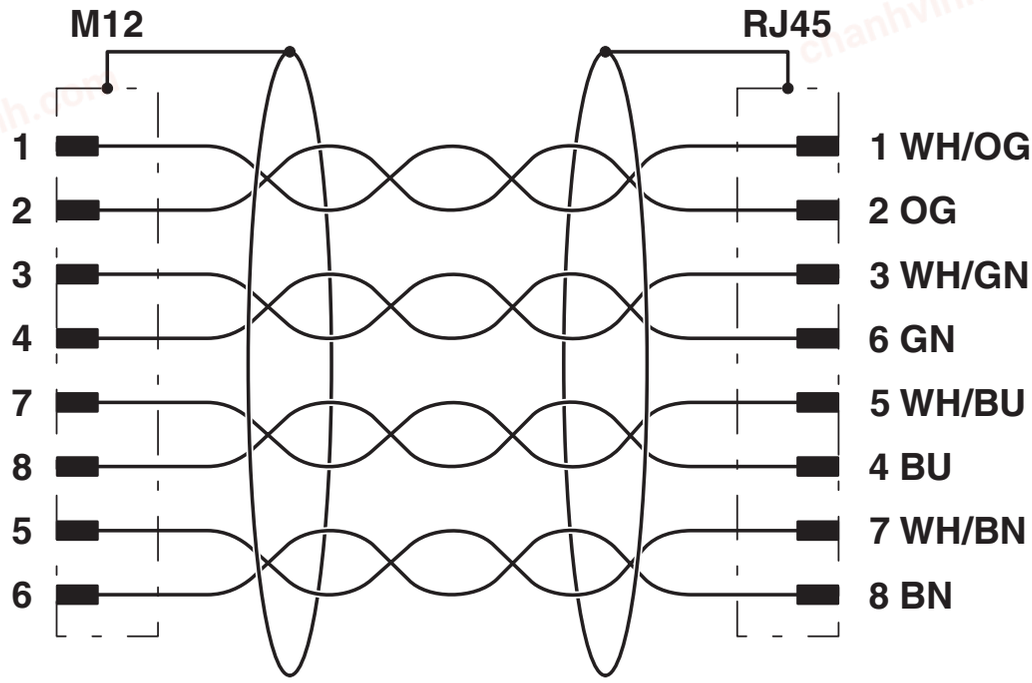


Contact assignment of the M12 and RJ45 plug

chanhvinh.com

# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/1407474

**UL Listed**
Approval ID: FILE E 335024

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| | 30 V | 0.5 A | - | - |

**cUL Listed**
Approval ID: FILE E 335024

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| | 30 V | 0.5 A | - | - |

**EAC-RoHS**
Approval ID: RU D-DE.HB35.B.00387

**cULus Listed**

chanhvinh.com

# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-11.0 | 27060307 |
| ECLASS-12.0 | 27060307 |
| ECLASS-13.0 | 27060307 |

### ETIM

| | |
|---|---|
| ETIM 9.0 | EC001855 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 26121600 |

chanhvinh.com

# NBC-M12MSX/10,0-94F/R4AC - Network cable

1407474

https://www.phoenixcontact.com/pc/products/1407474

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

EF3.0 Climate Change

| | |
|---|---|
| CO2e kg | 8.282 kg CO2e |

Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com