chanhvinh.com

CES-STPG-GY-2X8 - Cable sleeve

1410123

https://www.phoenixcontact.com/in/products/1410123

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable sleeve, small, no. of conductors: 2, type: Round cable, slotted, external cable diameter: 2x 7.4 mm ... 7.7 mm, material: SEBS (halogen-free), color: gray, length: 29.5 mm, width: 19.5 mm, height: 17 mm

Product description

Slotted cable sleeve

Commercial data

Item number	1410123
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	BF7
Product key	AF7CCX
Catalog page	Page 681 (C-2-2019)
GTIN	4046356776264
Weight per piece (including packing)	6.6 g
Weight per piece (excluding packing)	6.6 g
Customs tariff number	40169997
Country of origin	PL

chanhvinh.com

CES-STPG-GY-2X8 - Cable sleeve

1410123


https://www.phoenixcontact.com/in/products/1410123

Technical data

Product properties

Product type	Cable sleeve
No. of conductors	2

Dimensions

Dimensional drawing	
Width	19.5 mm
Height	17 mm
Length	29.5 mm

Material specifications

Material	SEBS (halogen-free)
Flammability rating according to UL 94	V0

Cable/line

External cable diameter	2x 7.4 mm ... 7.7 mm

Characteristics

Seal size	small
Design, Format	Round cable
Design, Cable seal	slotted

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP54
Ambient temperature (operation)	-40 °C ... 80 °C (static)

chanhvinh.com


CES-STPG-GY-2X8 - Cable sleeve

1410123

https://www.phoenixcontact.com/in/products/1410123

Drawings

Dimensional drawing

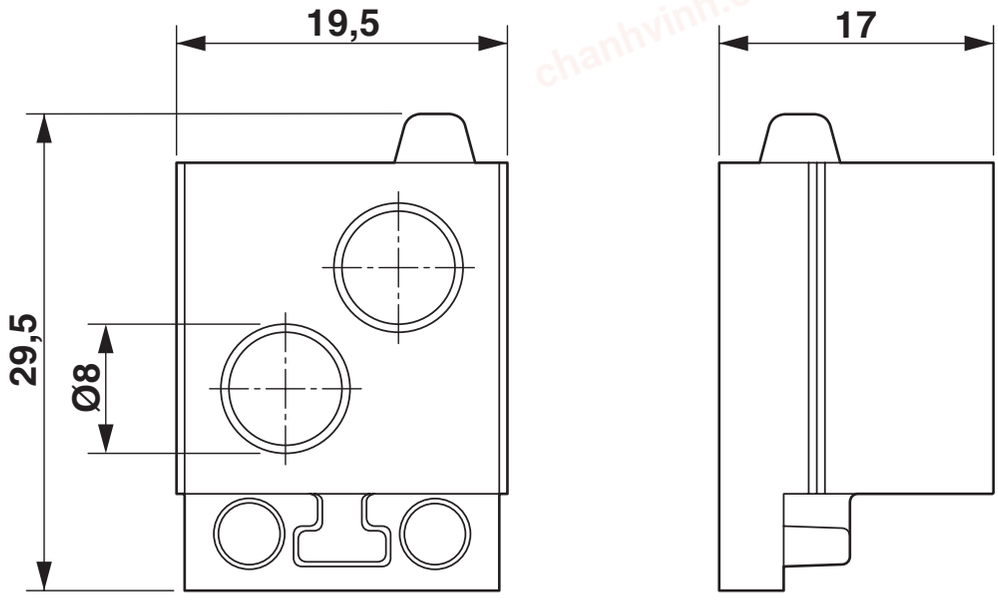

Dimensional drawing

chanhvinh.com

CES-STPG-GY-2X8 - Cable sleeve

1410123

https://www.phoenixcontact.com/in/products/1410123

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/in/products/1410123

cUL Recognized
Approval ID: E255026

UL Recognized
Approval ID: E255026

DNV
Approval ID: TAE00003VJ

cULus Recognized

chanhvinh.com

CES-STPG-GY-2X8 - Cable sleeve

1410123

https://www.phoenixcontact.com/in/products/1410123

Classifications

ECLASS

ECLASS-11.0	27144425
ECLASS-12.0	27144425
ECLASS-13.0	27144425

ETIM

ETIM 9.0	EC000451

UNSPSC

UNSPSC 21.0	39121400

chanhvinh.com

CES-STPG-GY-2X8 - Cable sleeve

1410123

https://www.phoenixcontact.com/in/products/1410123

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

EF3.0 Climate Change

CO2e kg	0.073 kg CO2e

chanhvinh.com

CES-STPG-GY-2X8 - Cable sleeve

1410123

https://www.phoenixcontact.com/in/products/1410123

Accessories

KDT-ST 8 - Filler plug

3063976

https://www.phoenixcontact.com/in/products/3063976



Filler plug, material: PA, length: 20 mm, diameter: 8 mm

CES-B10-HFFS-PLBK - Sealing frame

0801663

https://www.phoenixcontact.com/in/products/0801663



Sealing frame, With locking latch, design: B10, Number of cable seals (small): 6, material: PA (halogen-free), color: black, length: 99.2 mm, width: 58 mm, height: 20 mm

chanhvinh.com

CES-STPG-GY-2X8 - Cable sleeve

1410123

https://www.phoenixcontact.com/in/products/1410123

CES-B16-HFFS-PLBK - Sealing frame

0801662

https://www.phoenixcontact.com/in/products/0801662



Sealing frame, With locking latch, design: B16, Number of cable seals (small): 8, material: PA (halogen-free), color: black, length: 120 mm, width: 58 mm, height: 20 mm

CES-B24-HFFS-PLBK - Sealing frame

0801661

https://www.phoenixcontact.com/in/products/0801661



Sealing frame, With locking latch, design: B24, Number of cable seals (small): 10, material: PA (halogen-free), color: black, length: 147 mm, width: 58 mm, height: 20 mm

chanhvinh.com

CES-STPG-GY-2X8 - Cable sleeve

1410123

https://www.phoenixcontact.com/in/products/1410123

CES-B10-SFFS-PLBK - Sealing frame

0801660

https://www.phoenixcontact.com/in/products/0801660



Sealing frame, with screw locking, design: B10, Number of cable seals (small): 6, material: PA (halogen-free), color: black, length: 99.2 mm, width: 58 mm, height: 20 mm

CES-B16-SFFS-PLBK - Sealing frame

0801659

https://www.phoenixcontact.com/in/products/0801659



Sealing frame, with screw locking, design: B16, Number of cable seals (small): 8, material: PA (halogen-free), color: black, length: 120 mm, width: 58 mm, height: 20 mm

chanhvinh.com

CES-STPG-GY-2X8 - Cable sleeve

1410123

https://www.phoenixcontact.com/in/products/1410123

CES-B24-SFFS-PLBK - Sealing frame

0801658

https://www.phoenixcontact.com/in/products/0801658



Sealing frame, with screw locking, design: B24, Number of cable seals (small): 10, material: PA (halogen-free), color: black, length: 147 mm, width: 58 mm, height: 20 mm

Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in