chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Network cable, Sercos CAT5 (100 Mbps), 4-position, shielded, Plug straight M12 SPEEDCON / IP67, coding: D, on free cable end, cable length: 10 m

Commercial Data

Item number	1411507
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF1CJO
Product Key	BF1CJO
GTIN	4046356933711
Weight per Piece (including packing)	673.3 g
Weight per Piece (excluding packing)	673.3 g
Customs tariff number	85444210
Country of origin	PL

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Technical Data

Product properties

Product type	Data cable preassembled
Number of positions	4
Application	Standard
Shielded	yes
Coding	D - data

Interfaces

Bus system	Sercos III
Signal type/category	Sercos CAT5 (IEC 11801), 100 Mbps

LED signaling

Status display	No
Status display present	No

Electrical properties

Nominal voltage U_N	48 V AC
	60 V DC
Nominal current I_N	4 A
Transmission medium	Copper

Material specifications

Color Handle area	black

Connector

Connection 1

Type	Plug straight M12 SPEEDCON / IP67
Number of positions	4
Coding type	D (Data)
Handle color	black
Material	CuSn (Contact)
	Ni/Au (Contact surface)
	PA (Contact carriers)
	TPU, hardly inflammable, self-extinguishing (Grip)
	Zinc die-cast, nickel-plated (Screw connection)
Insertion/withdrawal cycles	≥ 100
Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Tightening torque	0.4 Nm
Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 90 °C

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Connection 2

Type	free cable end
Stripping length of the sheath (free conductor end)	45 mm ±10 mm

Cable / line

Cable length	10 m
Cable weight	68 kg/km
UL AWM Style	21694 (60°C / 600 V)
Number of positions	4
Shielded	yes
Cable type	Sercos III [93K]
Signal runtime	5.3 ns/m
Conductor structure signal line	7x 0.25 mm
AWG signal line	22
Conductor cross section	4x 0.34 mm²
Wire diameter incl. insulation	approx. 1.55 mm
External cable diameter	6.5 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	signal red RAL 3020
Conductor material	Tin-plated Cu litz wires
Material wire insulation	PE
Single wire, color	White, yellow, blue, orange
Thickness, outer sheath	approx. 0.9 mm
Type of pair shielding	Aluminum-lined polyester foil
Overall twist	Star quad
Max. conductor resistance	≤ 120 Ω/km
Insulation resistance	≥ 0.5 GΩ*km
Coupling resistance	≤ 20.00 mΩ/m (at 10 Hz)
Wave impedance	100 Ω ±15 Ω (at 100 MHz)
Nominal voltage, cable	600 V
Test voltage Core/Core	2000 V (50 Hz, 1 min.)
Test voltage Core/Shield	2000 V (50 Hz, 1 min.)
Minimum bending radius, fixed installation	3 x D
Minimum bending radius, flexible installation	7 x D
Flame resistance	according to UL 1685 (CSA FT 4)
Resistance to oil	Resistant to oil to a limited extent
Other resistance	UV resistant According to UL 1581, Section 1200
Ambient temperature (operation)	-40 °C ... 70 °C (cable, fixed installation)
	-40 °C ... 70 °C (Cable, flexible installation)
Ambient temperature (installation)	-20 °C ... 60 °C
Signal type/category	Sercos CAT5 (IEC 11801), 100 Mbps

Ambient conditions

Degree of protection	IP65 (M12 connector)

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

	IP67 (M12 connector)
Degree of protection	IP65/IP67
Ambient temperature (operation)	-25 °C ... 90 °C (M12 connector)

Standards and regulations

M12

Standards/specifications	IEC 61076-2-101

chanhvinh.com


Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507


Drawings

Circuit diagram

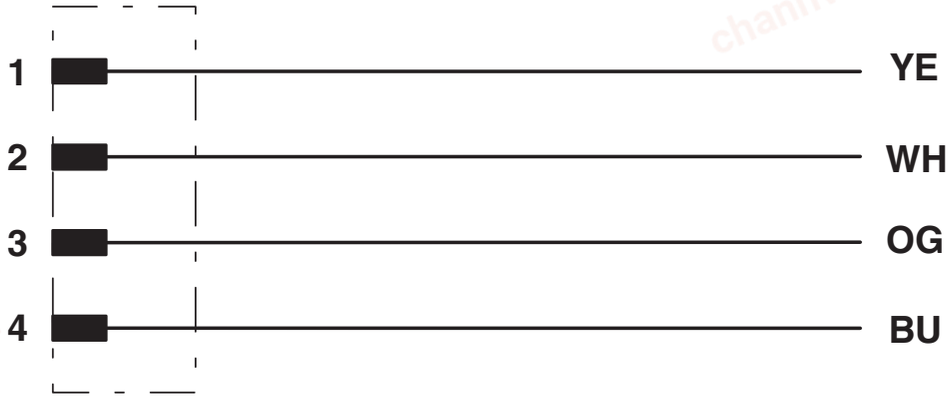

Contact assignment of the M12 plug

Dimensional drawing

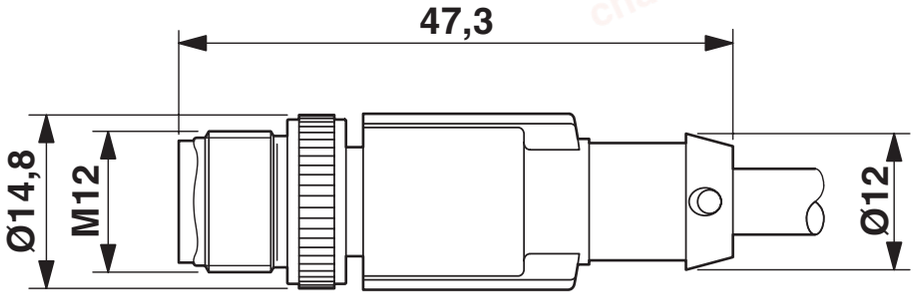

Plug, M12 x 1, straight, shielded


chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Schematic diagram

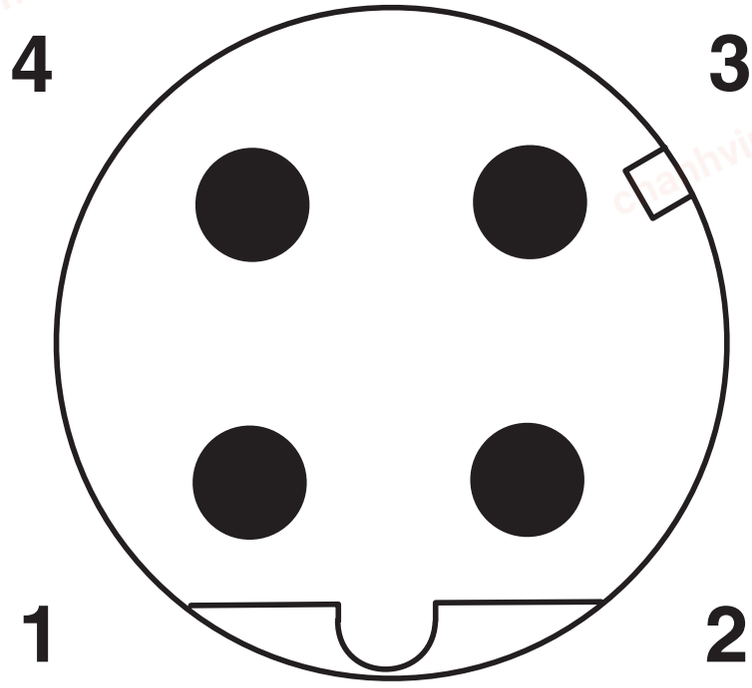

Pin assignment M12 male connector, 4-pos., D-coded, male side

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Approvals

EAC
Approval ID: RU D-DE.HB35.B.00387

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Classifications

ECLASS

ECLASS-9.0	27060308
ECLASS-10.0.1	27060308
ECLASS-11.0	27060307

ETIM

ETIM 8.0	EC001855

UNSPSC

UNSPSC 21.0	26121600

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Accessories

Torque screwdriver

Torque screwdriver - TSD 04 SAC - 1208429

https://www.phoenixcontact.com/gb/products/1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

Torque screwdriver

Torque screwdriver - TSD-M 1,2NM - 1212224

https://www.phoenixcontact.com/gb/products/1212224



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0. 3 - 1.2 Nm

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Adapter insert

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600

https://www.phoenixcontact.com/gb/products/1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

Tool

Tool - SAC BIT M12-D15 - 1208432

https://www.phoenixcontact.com/gb/products/1208432



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Sealing cap

Sealing cap - PROT-M12 FS-PA-CHAIN - 1430873

https://www.phoenixcontact.com/gb/products/1430873

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



Locking clip

Locking clip - SAC-M12-EXCLIP-M - 1558988

https://www.phoenixcontact.com/gb/products/1558988

Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Cable-cutting tool

Cable-cutting tool - CUTFOX 12 - 1212128

https://www.phoenixcontact.com/gb/products/1212128



Cable cutter, for copper and aluminum up to 12 mm diameter (up to 35 mm^2)

Diagonal cutter

Diagonal cutter - CUTFOX-S VDE - 1212207

https://www.phoenixcontact.com/gb/products/1212207



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Stripping tool

Stripping tool - VS-CABLE-STRIP-VARIO - 1657407

https://www.phoenixcontact.com/gb/products/1657407

Stripping tool, for the multi-level stripping of shielded cables



Diagonal cutter

Diagonal cutter - MICROFOX-SP-1 - 1212487

https://www.phoenixcontact.com/gb/products/1212487

Electronic diagonal cutter, tapered head, without chamfer, with opening spring, non-reflective phosphate-treated surface, punched version



chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Stripping tool

Stripping tool - WIREFOX 4 - 1212156

https://www.phoenixcontact.com/gb/products/1212156



Stripping tool, for cables and conductors (especially for rubber and silicone insulations) from 0.1 - 4 mm^2, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm^2 stranded/1.5 mm^2 solid, replaceable stripping blade

Stripping tool

Stripping tool - WIREFOX-E 4 - 1212704

https://www.phoenixcontact.com/gb/products/1212704



Stripping tool, for cables and conductors (especially for rubber and silicone insulations) from 0.1 - 4 mm^2, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm^2 stranded/1.5 mm^2 solid, replaceable stripping blade

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Stripping tool

Stripping tool - WIREFOX 10 - 1212150

https://www.phoenixcontact.com/gb/products/1212150



Stripping tool, for cables and conductors from 0.02 - 10 mm^2, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm^2 stranded/1.5 mm^2 solid, replaceable stripping blade

Protective hose adapter

Protective hose adapter - WP-CTA POM 13,0 BK - 1422884

https://www.phoenixcontact.com/gb/products/1422884



Protective hose adapter, for corrugated hoses with a nominal size of 13 (10 x 13), corrugated in parallel

chanhvinh.com

Network cable - NBC-MSD/10,0-93K SCO

1411507

https://www.phoenixcontact.com/gb/products/1411507

Protective hose

Protective hose - WP-PA HF 13,0 BK - 3240681

https://www.phoenixcontact.com/gb/products/3240681



Protective hose, material: PA 6, filament: without, UV-resistant: yes, flexible, degree of protection: IP68, color: black, inflammability class in acc. with UL 94: V0, inner diameter: 10 mm, Total length: 50 m

Protective hose

Protective hose - WP-PA HF-HB 13,0 BK - 3240839

https://www.phoenixcontact.com/gb/products/3240839



Protective hose, material: PA 6, filament: without, UV-resistant: yes, flexible, degree of protection: IP68, color: black, inflammability class in acc. with UL 94: HB, inner diameter: 10 mm, Total length: 50 m

Phoenix Contact 2022 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk