chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Network cable, Sercos CAT5 (100 Mbps), 4-position, shielded, Plug straight M12 SPEEDCON / IP67, coding: D, on Socket straight M12 SPEEDCON / IP67, coding: D, cable length: 10 m

Commercial Data

Item number	1411548
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF1CJO
Product Key	BF1CJO
GTIN	4046356933872
Weight per Piece (including packing)	703.7 g
Weight per Piece (excluding packing)	703 g
Customs tariff number	85444210
Country of origin	PL

chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Technical Data

Product properties

Product type	Data cable preassembled
Number of positions	4
Application	Standard
Shielded	yes
Coding	D - data

Interfaces

Bus system	Sercos III
Signal type/category	Sercos CAT5 (IEC 11801), 100 Mbps

LED signaling

Status display	No
Status display present	No

Electrical properties

Nominal voltage U_N	48 V AC
	60 V DC
Nominal current I_N	4 A
Transmission medium	Copper

Material specifications

Color Handle area	black

Connector

Connection 1

Type	Plug straight M12 SPEEDCON / IP67
Number of positions	4
Coding type	D (Data)
Handle color	black
Material	CuSn (Contact)
	Ni/Au (Contact surface)
	PA (Contact carriers)
	TPU, hardly inflammable, self-extinguishing (Grip)
	Zinc die-cast, nickel-plated (Screw connection)
Insertion/withdrawal cycles	≥ 100
Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Tightening torque	0.4 Nm
Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 90 °C

chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Connection 2

Type	Socket straight M12 SPEEDCON / IP67
Number of positions	4
Coding type	D (Data)
Handle color	black
Material	CuSn (Contact)
	Ni/Au (Contact surface)
	TPU GF (Contact carriers)
	TPU, hardly inflammable, self-extinguishing (Grip)
	Zinc die-cast, nickel-plated (Screw connection)
Insertion/withdrawal cycles	≥ 100
Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Tightening torque	0.4 Nm
Ambient temperature (operation)	-25 °C ... 90 °C

Cable / line

Cable length	10 m
Cable weight	68 kg/km
UL AWM Style	21694 (60°C / 600 V)
Number of positions	4
Shielded	yes
Cable type	Sercos III [93K]
Signal runtime	5.3 ns/m
Conductor structure signal line	7x 0.25 mm
AWG signal line	22
Conductor cross section	4x 0.34 mm²
Wire diameter incl. insulation	approx. 1.55 mm
External cable diameter	6.5 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	signal red RAL 3020
Conductor material	Tin-plated Cu litz wires
Material wire insulation	PE
Single wire, color	White, yellow, blue, orange
Thickness, outer sheath	approx. 0.9 mm
Type of pair shielding	Aluminum-lined polyester foil
Overall twist	Star quad
Max. conductor resistance	≤ 120 Ω/km
Insulation resistance	≥ 0.5 GΩ*km
Coupling resistance	≤ 20.00 mΩ/m (at 10 Hz)
Wave impedance	100 Ω ±15 Ω (at 100 MHz)
Nominal voltage, cable	600 V
Test voltage Core/Core	2000 V (50 Hz, 1 min.)

chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Test voltage Core/Shield	2000 V (50 Hz, 1 min.)
Minimum bending radius, fixed installation	3 x D
Minimum bending radius, flexible installation	7 x D
Flame resistance	according to UL 1685 (CSA FT 4)
Resistance to oil	Resistant to oil to a limited extent
Other resistance	UV resistant According to UL 1581, Section 1200
Ambient temperature (operation)	-40 °C ... 70 °C (cable, fixed installation)
	-40 °C ... 70 °C (Cable, flexible installation)
Ambient temperature (installation)	-20 °C ... 60 °C
Signal type/category	Sercos CAT5 (IEC 11801), 100 Mbps

Ambient conditions

Degree of protection	IP65 (M12 connector)
	IP67 (M12 connector)
Degree of protection	IP65/IP67
Ambient temperature (operation)	-25 °C ... 85 °C (M12 connector)

Standards and regulations

M12

Standards/specifications	IEC 61076-2-101

chanhvinh.com


Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548


Drawings

Dimensional drawing

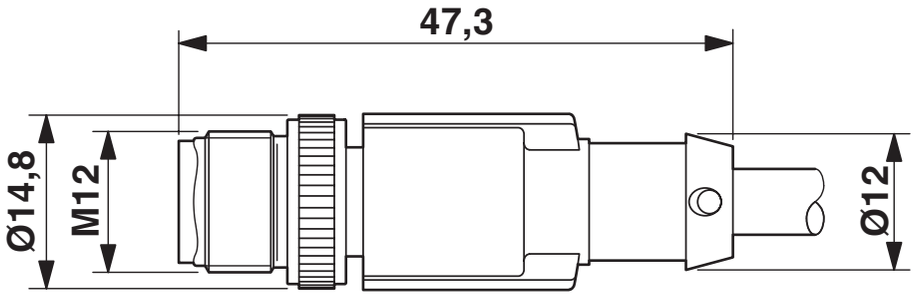

Plug, M12 x 1, straight, shielded

Schematic diagram

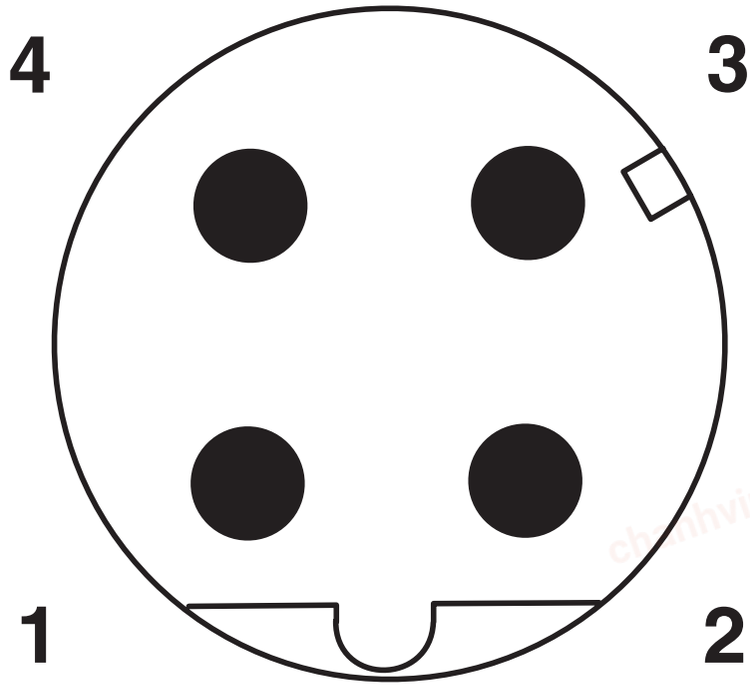

Pin assignment M12 male connector, 4-pos., D-coded, male side


chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548


https://www.phoenixcontact.com/gb/products/1411548

Dimensional drawing

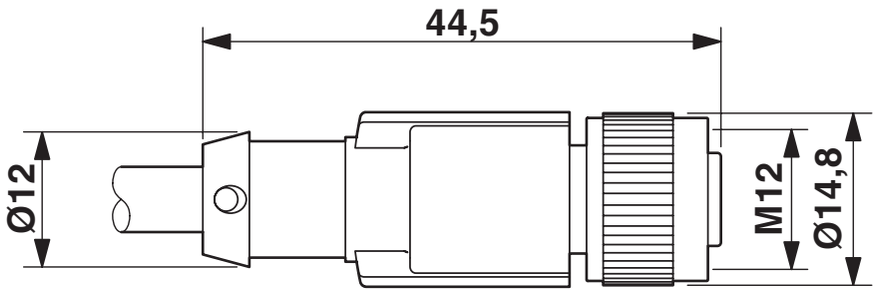

M12 x 1 socket, straight, shielded

Schematic diagram

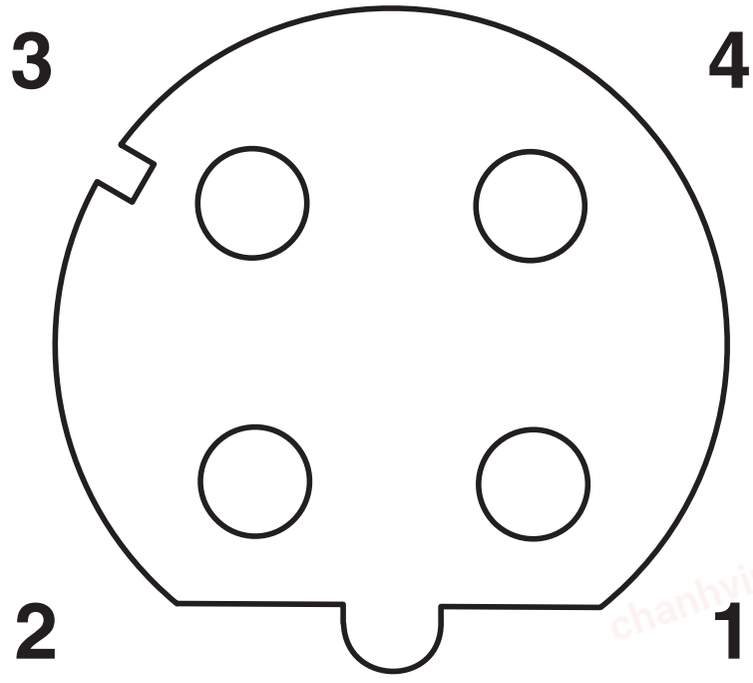

Pin assignment M12 socket, 4-pos., D-coded, female side


chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Circuit diagram

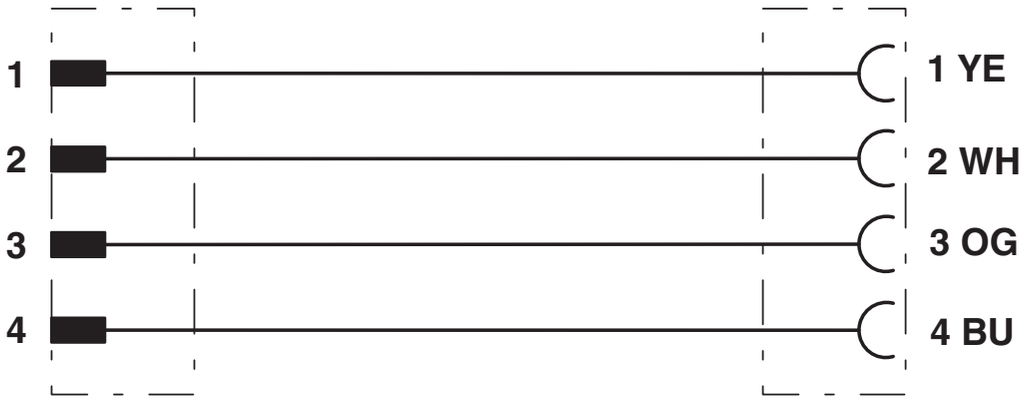

Contact assignment of the M12 connector and the M12 socket

chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Approvals

EAC
Approval ID: RU D-DE.HB35.B.00387

chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Classifications

ECLASS

ECLASS-9.0	27060308
ECLASS-10.0.1	27060308
ECLASS-11.0	27060307

ETIM

ETIM 8.0	EC001855

UNSPSC

UNSPSC 21.0	26121600

chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Accessories

Torque screwdriver

Torque screwdriver - TSD 04 SAC - 1208429

https://www.phoenixcontact.com/gb/products/1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

Torque screwdriver

Torque screwdriver - TSD-M 1,2NM - 1212224

https://www.phoenixcontact.com/gb/products/1212224



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0. 3 - 1.2 Nm

chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Adapter insert

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600

https://www.phoenixcontact.com/gb/products/1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

Tool

Tool - SAC BIT M12-D15 - 1208432

https://www.phoenixcontact.com/gb/products/1208432



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Sealing cap

Sealing cap - PROT-M12 FS-PA-CHAIN - 1430873

https://www.phoenixcontact.com/gb/products/1430873

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



Locking clip

Locking clip - SAC-M12-EXCLIP-M - 1558988

https://www.phoenixcontact.com/gb/products/1558988

Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



chanhvinh.com

Network cable - NBC-MSD/10,0-93K/FSD SCO

1411548

https://www.phoenixcontact.com/gb/products/1411548

Screw plug

Screw plug - PROT-M12 MS-PA-CHAIN - 1430899

https://www.phoenixcontact.com/gb/products/1430899

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



Locking clip

Locking clip - SAC-M12-EXCLIP-F - 1558991

https://www.phoenixcontact.com/gb/products/1558991

Locking clip for the socket side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



Phoenix Contact 2022 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk