chanhvinh.com

# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Network cable, Ethernet CAT5 (100 Mbps), 4-position, PUR halogen-free, water blue RAL 5021, shielded (Advanced Shielding Technology), Plug straight M12, coding: D / IP67, on Plug straight RJ45 / IP20, cable length: 6 m

## Commercial data

| | |
|---|---|
| Item number | 1411560 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | AF1CJI |
| Product key | AF1CJI |
| GTIN | 4046356935098 |
| Weight per piece (including packing) | 277.4 g |
| Weight per piece (excluding packing) | 277.4 g |
| Customs tariff number | 85444210 |
| Country of origin | PL |

chanhvinh.com

# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560

## Technical data

### Notes

| | |
|---|---|
| General | Further products with variable cable type and variable cable length can be found in the accessories section |

### Product properties

| | |
|---|---|
| Product type | Data cable preassembled |
| Application | Standard |
| Sensor type | Ethernet |
| Number of positions | 4 |
| Shielded | yes |

### Interfaces


| | |
|---|---|
| Signal type/category | Ethernet CAT5 (IEC 11801), 100 Mbps |

### Electrical properties

| | |
|---|---|
| Nominal voltage $U_N$ | 48 V AC |
| | 60 V DC |
| Nominal current $I_N$ | 1 A |
| Transmission medium | Copper |

### Connector

Connection 1

| | |
|---|---|
| Dimensional drawing |  Pin assignment M12 male connector, 4-pos., D-coded, male side |
| Type | M12 Plug, straight, 4-position, shielded (Advanced Shielding Technology), Keying: D |
| Number of positions | 4 |
| Shielded | yes |
| Shielding | Advanced Shielding Technology |
| Signal type/category | Ethernet CAT5 (IEC 11801), 100 Mbps |
| Insertion/withdrawal cycles | ≥ 100 |
| Insulation resistance | ≥ 100 MΩ |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Tightening torque | 0.4 Nm |
| Material Contact | CuSn |
| Material Contact surface | Ni/Au |

chanhvinh.com


# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560

| | |
|---|---|
| Material Contact carrier | PA 6.6 |
| Material Screw connection | Die-cast zinc, nickel-plated |
| Material Grip body | TPU, hardly inflammable, self-extinguishing |
| Material Seal | FKM |
| Flammability rating according to UL 94 | V0 |
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) | -25 °C ... 85 °C |
| Standard designation | M12 connector |
| Standards/regulations | IEC 61076-2-101 |

Connection 2

| | |
|---|---|
| Dimensional drawing |  Connector pin assignment plug RJ45 |
| Type | RJ45 Plug, straight |
| Signal type/category | Ethernet CAT5 (IEC 11801), 100 Mbps |
| Insertion/withdrawal cycles | ≥ 750 |
| Insulation resistance | ≥ 100 MΩ |
| Overvoltage category | I |
| Degree of pollution | 2 |
| Material Contact | CuSn |
| Material Contact surface | Ni/Au |
| Material Contact carrier | PC |
| Material Housing | PA |
| Color (Housing) | gray |
| Flammability rating according to UL 94 | V2 |
| Degree of protection | IP20 |
| Ambient temperature (operation) | -25 °C ... 60 °C |

## Cable/line

| | |
|---|---|
| Cable length | 6 m |

Ethernet flexible CAT5, 2-pair [93E]

chanhvinh.com

# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560

| | |
|---|---|
| Dimensional drawing |  |
| Cable weight | 42 kg/km |
| UL AWM Style | 20963 (80°C/30 V) |
| Wiring standards/regulations | Electrical requirements EN 50288-2-2 |
| Number of positions | 4 |
| Shielded | yes |
| Cable type | Ethernet flexible CAT5, 2-pair [93E] |
| Conductor structure | 2x2xAWG26/7, SF/UTP |
| Signal runtime | 5.3 ns/m |
| Conductor structure signal line | 7x 0.16 mm |
| AWG signal line | 26 |
| Conductor cross section | 2x 2x 0.14 mm² |
| Wire diameter incl. insulation | 0.98 mm |
| External cable diameter | 6.40 mm ±0.2 mm |
| Outer sheath, material | PUR |
| External sheath, color | water blue RAL 5021 |
| Conductor material | Bare Cu litz wires |
| Material wire insulation | Foamed PE |
| Single wire, color | white/orange-orange, white/green-green |
| Thickness, outer sheath | 1.20 mm |
| Twisted pairs | 2 cores to the pair |
| Overall twist | Two pairs with two fillers to the core |
| Optical shield covering | 70 % |
| Insulation resistance | ≥ 500 MΩ*km |
| Coupling resistance | ≤ 100.00 mΩ/m (at 10 MHz) |
| Loop resistance | ≤ 290.00 Ω/km |
| Wave impedance | 100 Ω ±5 Ω (at 100 MHz) |
| Cable capacity | approx. 45 nF/km (at 1 kHz) |
| Nominal voltage, cable | ≤ 100 V (Peak value, not for high-power applications) |
| Test voltage Core/Core | 700 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 700.00 V (50 Hz, 1 min.) |
| Current carrying capacity of cable | 2.00 A (according to DIN VDE 0891-1) |
| Minimum bending radius, fixed installation | 4 x D |
| Minimum bending radius, flexible installation | 8 x D |
| Smallest bending radius, fixed installation | 26 mm |
| Smallest bending radius, movable installation | 52 mm |
| Tensile strength | ≤ 80 N |

chanhvinh.com

# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560

| | |
|---|---|
| Near end crosstalk attenuation (NEXT) | 65.3 dB (with 1 MHz) |
| | 56.3 dB (at 4 MHz) |
| | 50.3 dB (at 10 MHz) |
| | 47.2 dB (at 16 MHz) |
| | 45.8 dB (at 20 MHz) |
| | 42.9 dB (at 31.25 MHz) |
| | 38.4 dB (at 62.5 MHz) |
| | 35.3 dB (at 100 MHz) |
| Power-summated near end crosstalk attenuation (PSNEXT) | 62.3 dB (with 1 MHz) |
| | 53.3 dB (at 4 MHz) |
| | 47.3 dB (at 10 MHz) |
| | 44.2 dB (at 16 MHz) |
| | 42.8 dB (at 20 MHz) |
| | 39.9 dB (at 31.25 MHz) |
| | 35.4 dB (at 62.5 MHz) |
| | 32.3 dB (at 100 MHz) |
| Return attenuation (RL) | 23 dB (at 4 MHz) |
| | 24.1 dB (at 8 MHz) |
| | 25 dB (at 10 MHz) |
| | 25 dB (at 16 MHz) |
| | 25 dB (at 20 MHz) |
| | 23.6 dB (at 31.25 MHz) |
| | 21.5 dB (at 62.5 MHz) |
| | 20.1 dB (at 100 MHz) |
| Shield attenuation | 3.2 dB (with 1 MHz) |
| | 6 dB (at 4 MHz) |
| | 9.5 dB (at 10 MHz) |
| | 12.1 dB (at 16 MHz) |
| | 13.6 dB (at 20 MHz) |
| | 17.1 dB (at 31.25 MHz) |
| | 24.8 dB (at 62.5 MHz) |
| | 32 dB (at 100 MHz) |
| Halogen-free | according to IEC 60754-1 |
| Flame resistance | according to IEC 60332-1-2 |
| | in acc. to UL VW1 |
| | in accordance with UN ECE-R 118.03 |
| Resistance to oil | in accordance with EN 60811-2-1 |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -20 °C ... 80 °C (Cable, flexible installation) |
| Ambient temperature (installation) | -20 °C ... 80 °C |

chanhvinh.com


# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560


## Drawings

Dimensional drawing

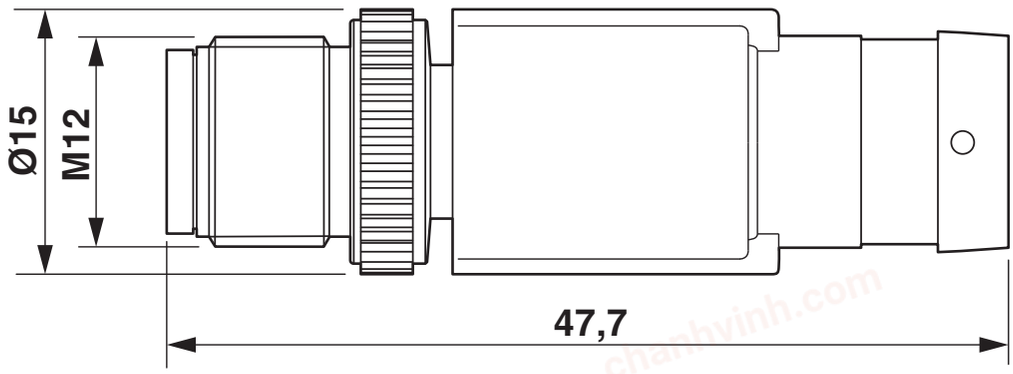


Plug, M12 x 1, straight, shielded

Dimensional drawing

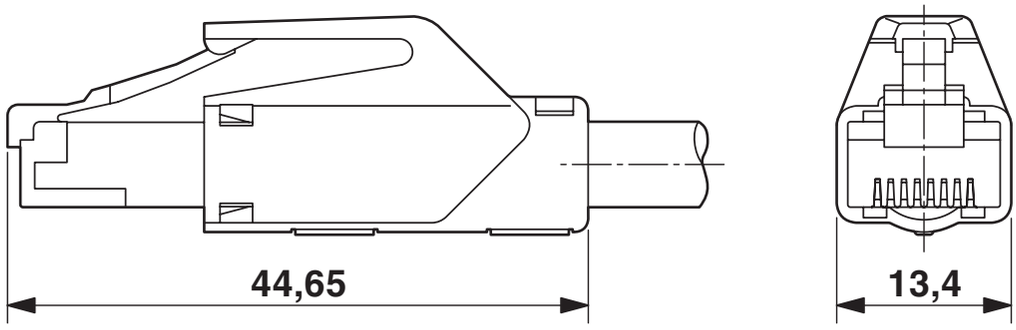


RJ45 connector, IP20


chanhvinh.com

# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560

Schematic diagram

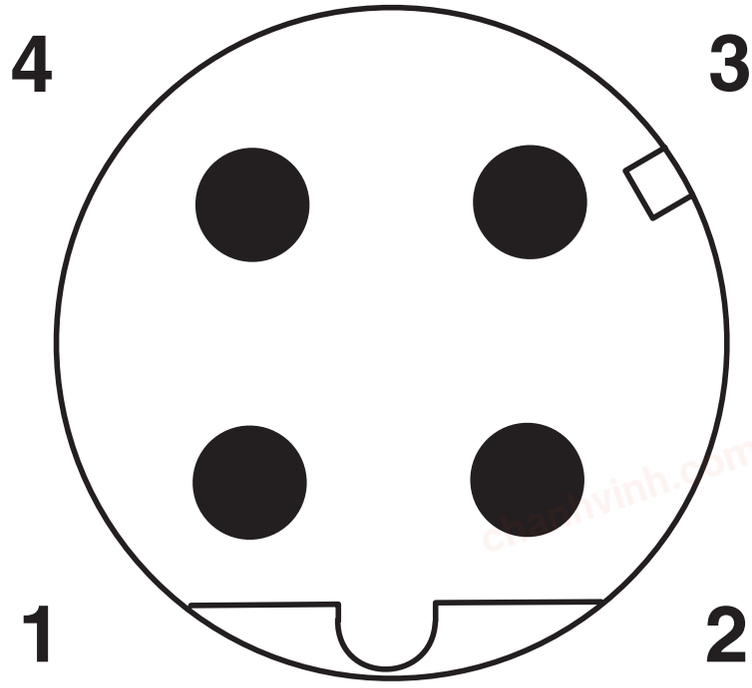


Pin assignment M12 male connector, 4-pos., D-coded, male side


chanhvinh.com

# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560

Schematic diagram

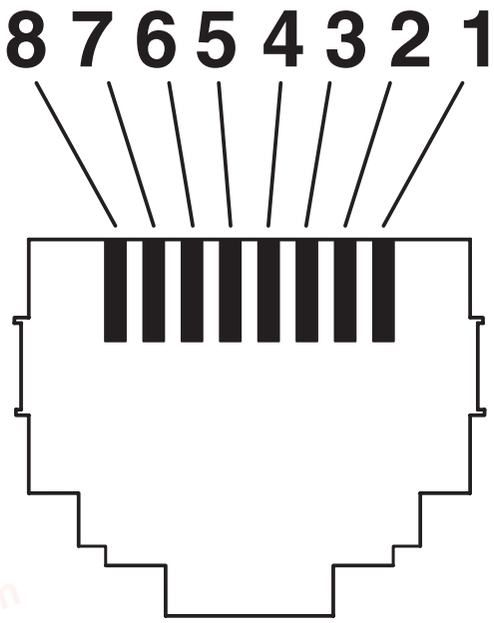


Connector pin assignment plug RJ45


chanhvinh.com

# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560

Circuit diagram

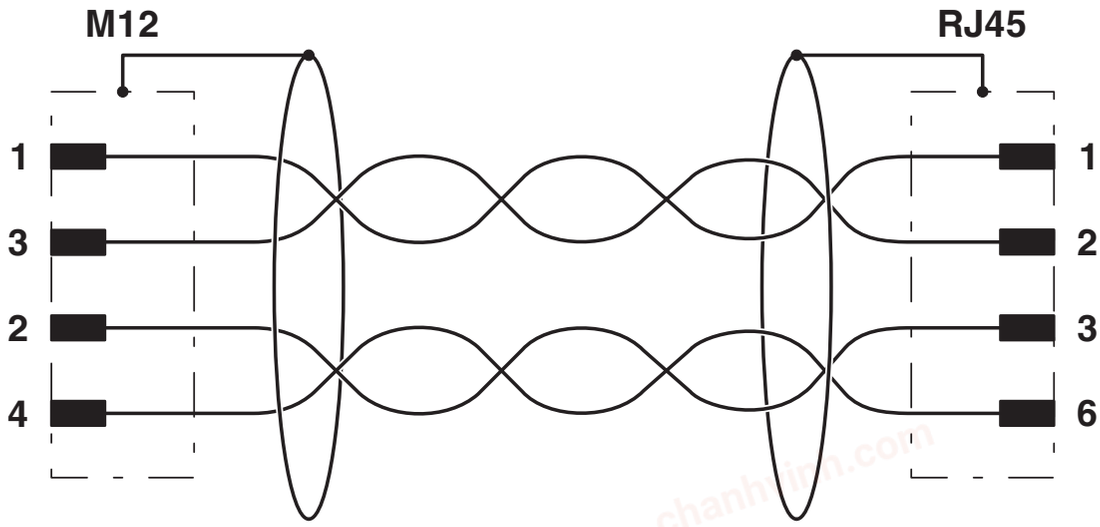


Contact assignment of the M12 and RJ45 plug

chanhvinh.com

# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/gb/products/1411560

**EAC-RoHS**
Approval ID: RU D-DE.HB35.B.00387

chanhvinh.com

# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-13.0 | 27060307 |

### ETIM

| | |
|---|---|
| ETIM 9.0 | EC001855 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 26121600 |

chanhvinh.com

# NBC-M12MSD/ 6,0-93E/R4AC - Network cable

1411560

https://www.phoenixcontact.com/gb/products/1411560

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk