chanhvinh.com

# SAC-5P-M12MRK/ 3,0-PUR PE - Power cable

1414837

https://www.phoenixcontact.com/gb/products/1414837

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 5-position, PUR halogen-free, black-gray RAL 7021, Plug angled M12, coding: K, on free cable end, cable length: 3 m, for AC current up to 16 A/690 V

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Protection against mismatching, thanks to special K-coding
- Our standard: robust halogen-free PUR cable

## Commercial data

| | |
|---|---|
| Item number | 1414837 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF1CDQ |
| Product key | BF1CDQ |
| Catalog page | Page 292 (C-2-2019) |
| GTIN | 4055626034706 |
| Weight per piece (including packing) | 569.12 g |
| Weight per piece (excluding packing) | 569.12 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

chanhvinh.com

# SAC-5P-M12MRK/ 3,0-PUR PE - Power cable

1414837

https://www.phoenixcontact.com/gb/products/1414837

## Technical data

### Product properties

| | |
|---|---|
| Product type | Power cable |
| Application | Power supply |
| Number of positions | 5 |
| No. of cable outlets | 1 |
| Shielded | no |
| Coding | K |

Data management status

| | |
|---|---|
| Article revision | 06 |

Insulation characteristics

| | |
|---|---|
| Overvoltage category | III |
| Degree of pollution | 3 |

### Material specifications

| | |
|---|---|
| Flammability rating according to UL 94 | V0 |
| Material of grip body | PP |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA |
| Material for screw connection | Zinc die-cast, nickel-plated |

### Electrical properties

| | |
|---|---|
| Insulation resistance | ≥ 100 MΩ |
| Nominal voltage $U_N$ | 690 V AC |
| Nominal current $I_N$ | 16 A |

### Mechanical properties

Mechanical data

| | |
|---|---|
| Insertion/withdrawal cycles | ≥ 100 |

### Connector

Connection 1

| | |
|---|---|
| Type | Plug angled M12 |
| Coding type | K (Power) |

Connection 2

| | |
|---|---|
| Type | free cable end |

### Cable/line

| | |
|---|---|
| Cable length | 3 m |


chanhvinh.com

# SAC-5P-M12MRK/ 3,0-PUR PE - Power cable

1414837

https://www.phoenixcontact.com/gb/products/1414837

PUR halogen-free black [PUR]

| | |
|---|---|
| Dimensional drawing |  |
| Cable weight | 189 kg/km |
| UL AWM Style | 22078 / 11560 (90 °C / 1000 V) |
| Number of positions | 5 |
| Shielded | no |
| Cable type | PUR halogen-free black [PUR] |
| Conductor cross section | 5x 2.5 mm² |
| Wire diameter incl. insulation | 2.8 mm ±0.1 mm |
| External cable diameter | 9.70 mm ±0.3 mm |
| Outer sheath, material | PUR |
| External sheath, color | black-gray RAL 7021 |
| Conductor material | Bare Cu litz wires |
| Material wire insulation | PP |
| Single wire, color | black 1, black 2, black 3, black 4, green/yellow |
| Thickness, insulation | ≥ 0.36 mm |
| Thickness, outer sheath | approx. 1.15 mm |
| Max. conductor resistance | ≤ 8 Ω/km (at 20 °C) |
| Insulation resistance | ≥ 1 GΩ*km (at 20 °C) |
| Nominal voltage, cable | ≤ 1000 V AC |
| Test voltage | ≥ 10000 V AC (Spark test) |
| Minimum bending radius, fixed installation | 5 x D |
| Minimum bending radius, flexible installation | 10 x D |
| Smallest bending radius, fixed installation | 49 mm |
| Smallest bending radius, movable installation | 97 mm |
| Dynamic load capacity (bending) | Max. bending cycles: 4000000, Bending radius: 10 x D, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s² |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |
| | in accordance with DIN EN 50267-2-1 |
| Flame resistance | According to UL 758/1581 (Cable Flame) |
| | according to UL 758/1581 FT1 |
| | According to DIN EN 60332-1-2 |
| Resistance to oil | according to DIN EN 60811-404, 168 h at 100 °C |
| Other resistance | Hydrolysis and microbe resistant as per VDE 0282 section 10 |
| | Low adhesion |
| | abrasion-resistant |

chanhvinh.com

# SAC-5P-M12MRK/ 3,0-PUR PE - Power cable

1414837

https://www.phoenixcontact.com/gb/products/1414837

| | |
|---|---|
| | Resistant to salt water |
| Ambient temperature (operation) | -50 °C ... 90 °C (cable, fixed installation) |
| | -30 °C ... 90 °C (Cable, flexible installation) |

## Environmental and real-life conditions

### Ambient conditions

| | |
|---|---|
| Degree of protection | IP65 |
| | IP67 (without preloading, as additional test in accordance with IEC 60529) |
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |

## Standards and regulations

| | |
|---|---|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-111 |

chanhvinh.com


# SAC-5P-M12MRK/ 3,0-PUR PE - Power cable

1414837

https://www.phoenixcontact.com/gb/products/1414837


## Drawings

Dimensional drawing

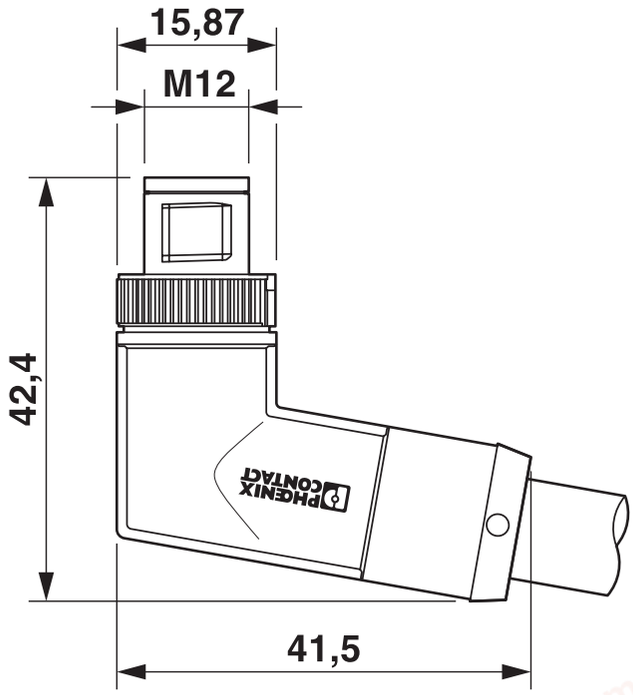


M12 x 1 male plug, angled

Schematic diagram

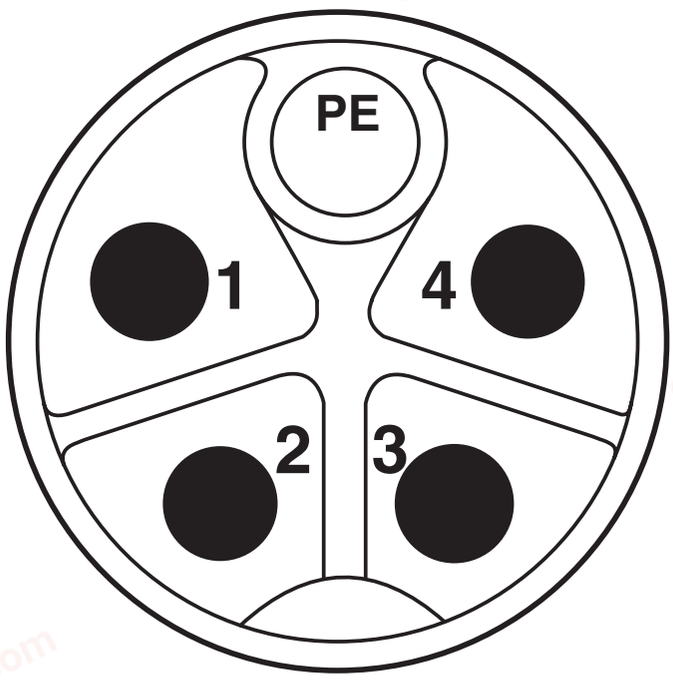


Connector pin assignment of M12 plug, 5-pos., K-coded, pin side view

chanhvinh.com

# SAC-5P-M12MRK/ 3,0-PUR PE - Power cable


1414837

https://www.phoenixcontact.com/gb/products/1414837

Circuit diagram




Diagram

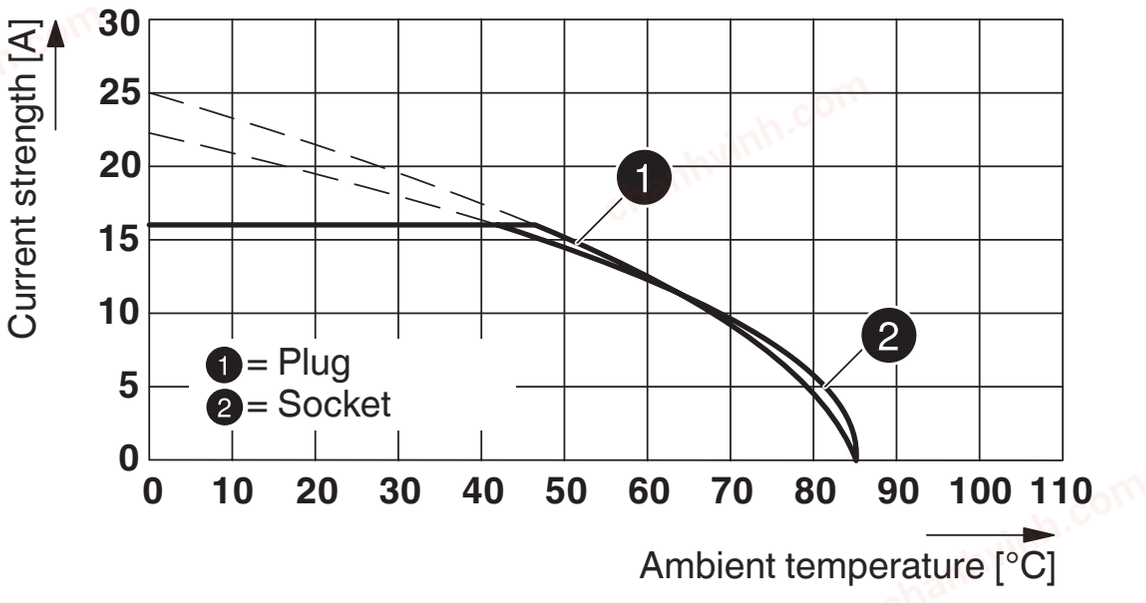

chanhvinh.com

# SAC-5P-M12MRK/ 3,0-PUR PE - Power cable

1414837

https://www.phoenixcontact.com/gb/products/1414837

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/gb/products/1414837

**UL Listed**
Approval ID: E468743

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| | 600 V | 16 A | - | - 14 |

**cUL Listed**
Approval ID: E468743

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| | 600 V | 16 A | - 14 | - |

**EAC-RoHS**
Approval ID: RU D-DE.HB35.B.00387

**cULus Listed**

chanhvinh.com

# SAC-5P-M12MRK/ 3,0-PUR PE - Power cable

1414837

https://www.phoenixcontact.com/gb/products/1414837

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060327 |

### ETIM

| | |
|---|---|
| ETIM 9.0 | EC001855 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 26121600 |

chanhvinh.com

# SAC-5P-M12MRK/ 3,0-PUR PE - Power cable

1414837

https://www.phoenixcontact.com/gb/products/1414837

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

EF3.0 Climate Change

| | |
|---|---|
| CO2e kg | 4.483 kg CO2e |

Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk